

Cover Page

Standard: BACB30NW Rev: (AY) 29-Jul-2015

WARNING - The Export Control or Intellectual Property language on this page takes precedence over any such language that may appear on subsequent pages of this document.

No license is required for the dissemination of the commercial information contained herein to foreign persons other than those from or in the terrorist supporting countries identified in the United States Export Administration Regulations (EAR) (15 CFR 730-774). It is the responsibility of the individual in control of this data to abide by U.S. export laws.

ECCN EAR99

Boeing Proprietary, Distribution limited to Boeing employees and others covered by applicable proprietary information or nondisclosure agreements.


Copyright © 1992-1996, 2009, 2011, 2015 Boeing. All rights reserved.

Any reproduction of this document or portions thereof must also reproduce this page of the document.

BOEING PART STANDARD
THE BOEING COMPANY**BACB30NW**Revision AY
29 July 2015
Page 1 of 10**BOLT, 100 DEG REDUCED SHEAR HEAD, HEX DRIVE, 95 KSI SHEAR, 6AL-4V TITANIUM
(NOMINAL AND OVERSIZE)**

TECHNICAL CHANGES IDENTIFIED BY REVISION BAR.

FOR STATUS OF INACTIVATION SEE APPLICABILITY SECTION.

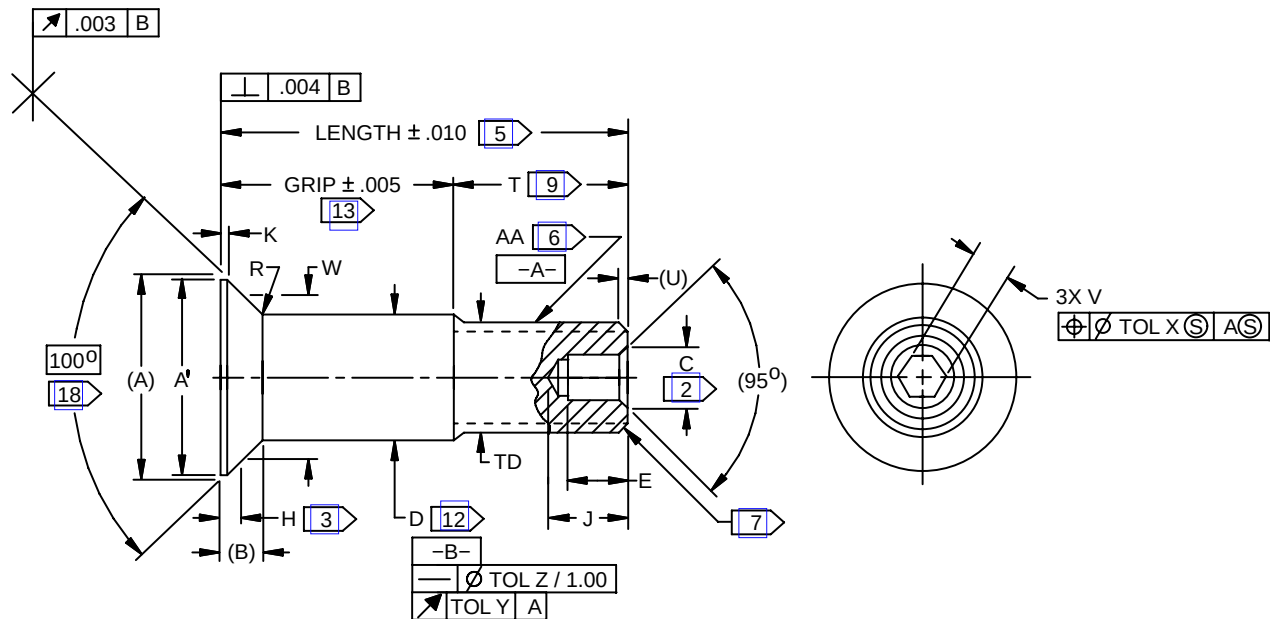DIMENSIONING AND TOLERANCING PER [ANSI Y14.5M-1982](#).

DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED.

DIMENSIONS APPLY AFTER FINISH UNLESS OTHERWISE SPECIFIED.

TABLE I

BOEING STANDARD NUMBER BACB30NW 8	AA NOMINAL THREAD SIZE 6	Ø A REF TO SHARP CORNER 1				Ø A' MIN		
		NOMINAL AND .0156 OVERSIZE 14		.0312 OVERSIZE 14		NOMINAL	.0156 OVERSIZE 14	.0312 OVERSIZE 14
		MAX	MIN	MAX	MIN			
5 15	.1640-32	.2621	.2557	---	---	.242	---	---
6	.1900-32	.3029	.2955	.3320	.3241	.270	.258	.299
8	.2500-28	.3967	.3879	.4277	.4194	.363	.350	.383
10	.3125-24	.4765	.4667	.5068	.4984	.442	.429	.462
12	.3750-24	.5646	.5529	.5939	.5846	.529	.515	.558
14	.4375-20	.6721	.6594	.7067	.6911	.620	.605	.637
16	.5000-20	.7615	.7441	.7876	.7768	.706	.690	.723
18	.5625-18	.8483	.8287	.8715	.8525	.790	.774	.798
20	.6250-18	.9333	.9115	.9585	.9411	.877	.860	.887
24	.7500-16	1.1073	1.0811	1.1388	1.1139	1.049	1.030	1.073

BOEING STANDARD NUMBER BACB30NW 8	B REF 1			Ø C	
	NOMINAL	.0156 OVERSIZE 14	.0312 OVERSIZE 14	MAX	MIN
5 15	.041	---	---	2	2
6	.048	.042	.048	.119	.104
8	.062	.055	.062	.142	.122
10	.069	.062	.069	.180	.160
12	.080	.073	.079	.217	.197
14	.099	.092	.100	.253	.233
16	.109	.102	.108	.289	.269
18	.120	.114	.113	.326	.306
20	.130	.123	.124	.326	.306
24	.150	.144	.150	.398	.378

TABLE I (Continued)

BOEING STANDARD NUMBER BACB30NW 8	Ø D					
	NOMINAL SIZE					
	BEFORE FINISH			AFTER FINISH		
	CAD PLATE	CAD PLATE, IVD	ALUM COAT, SOLID FILM LUBE	ALL 10	ALL EXCEPT NO FINISH OR PHOSPHATE FLUORIDE WITH CETYL	NO FINISH OR PHOSPHATE FLUORIDE WITH CETYL
	MAX	MIN	MIN	MAX	MIN	MIN
5 15	.1625	.1619	.1621	.1635	.1625	.1630
6	.1885	.1879	.1881	.1895	.1885	.1890
8	.2485	.2479	.2481	.2495	.2485	.2490
10	.3110	.3104	.3106	.3120	.3110	.3115
12	.3735	.3729	.3731	.3745	.3735	.3740
14	.4360	.4354	.4356	.4370	.4360	.4365
16	.4985	.4979	.4981	.4995	.4985	.4990
18	.5605	.5599	.5601	.5615	.5605	.5610
20	.6230	.6224	.6226	.6240	.6230	.6235
24	.7480	.7474	.7476	.7490	.7480	.7485

BOEING STANDARD NUMBER BACB30NW 8	Ø D									
	.0156 OVERSIZE 14					.0312 OVERSIZE 14				
	BEFORE FINISH		AFTER FINISH			BEFORE FINISH		AFTER FINISH		
	IVD	ALUM COAT OR SOLID FILM	ALL 10	ALL EXCEPT NO FINISH OR PHOSPHATE FLUORIDE WITH CETYL	NO FINISH OR PHOSPHATE FLUORIDE WITH CETYL	IVD	ALUM COAT OR SOLID FILM	ALL 10	ALL EXCEPT NO FINISH OR PHOSPHATE FLUORIDE WITH CETYL	NO FINISH OR PHOSPHATE FLUORIDE WITH CETYL
	MAX	MIN	MAX	MIN	MIN	MAX	MIN	MAX	MIN	MIN
5 15	---	---	---	---	---	---	---	---	---	---
6	.2010	.2012	.2026	.2016	.2021	.2166	.2168	.2182	.2172	.2177
8	.2635	.2637	.2651	.2641	.2646	.2791	.2793	.2807	.2797	.2802
10	.3260	.3262	.3276	.3266	.3271	.3416	.3418	.3432	.3422	.3427
12	.3885	.3887	.3901	.3891	.3896	.4041	.4043	.4057	.4047	.4052
14	.4510	.4512	.4526	.4516	.4521	.4666	.4668	.4682	.4672	.4677
16	.5135	.5137	.5151	.5141	.5146	.5291	.5293	.5307	.5297	.5302
18	.5755	.5757	.5771	.5761	.5766	.5911	.5913	.5927	.5917	.5922
20	.6380	.6382	.6396	.6386	.6391	.6536	.6538	.6552	.6542	.6547
24	.7630	.7632	.7646	.7636	.7641	.7786	.7788	.7802	.7792	.7797

TABLE I (Continued)

BOEING STANDARD NUMBER BACB30NW 8	E MIN	H GAGE PROTRUSION 3				J MAX	K LAND MAX	R RAD	
		NOM & .0156 OVERSIZE		.0312 OVERSIZE				MAX	MIN
		MAX	MIN	MAX	MIN				
5 15	.115	.0215 15	.0187 15	15	15	.178	.010	.025	.015
6	.115	.0248	.0216	.0370	.0336	.178	.015	.030	.020
8	.130	.0275	.0237	.0405	.0369	.200	.015	.030	.020
10	.150	.0302	.0260	.0429	.0393	.240	.015	.040	.030
12	.180	.0333	.0283	.0456	.0416	.275	.015	.040	.030
14	.210	.0430	.0376	.0575	.0509	.315	.022	.050	.040
16	.240	.0469	.0395	.0578	.0532	.360	.022	.050	.040
18	.270	.0539	.0456	.0636	.0556	.400	.022	.050	.040
20	.305	.0555	.0463	.0661	.0587	.440	.022	.050	.040
24	.365	.0576	.0465	.0708	.0603	.509	.022	.050	.040

BOEING STANDARD NUMBER BACB30NW 8	T 9	Ø TD 6		U REF	V HEX		Ø W GAGE +.0002 -.0000 3	TOLERANCE			
		MAX	MIN		X	Y		Z			
						NOMINAL			.0156 & .0312 OVERSIZE		
5 15	.312	.1595	.1570	.031	.0645	.0635	.2109	.010	.0045	15	.0040
6	.325	.1840	.1810	.031	.0806	.0791	.2438	.010	.0045	.0045	.0040
8	.395	.2440	.2410	.031	.0967	.0947	.3312	.010	.0045	.0045	.0030
10	.500	.3060	.3020	.047	.1295	.1270	.4045	.012	.0045	.0045	.0030
12	.545	.3680	.3640	.047	.1617	.1582	.4852	.014	.0060	.0060	.0025
14	.635	.4310	.4260	.047	.1930	.1895	.5696	.017	.0060	.0060	.0025
16	.685	.4930	.4880	.047	.2242	.2207	.6498	.020	.0060	.0060	.0025
18	.770	.5550	.5500	.062	.2555	.2520	.7198	.024	.0060	.0080	.0020
20	.825	.6180	.6120	.062	.2555	.2520	.8010	.026	.0060	.0080	.0020
24	1.050	.7430	.7370	.062	.3185	.3150	.9700	.030	.0090	.0090	.0020

NOTES

- ① DIMENSIONS "A" AND "B" ARE FOR REFERENCE ONLY; THEY ARE CALCULATED VALUES RESULTING FROM TOLERANCES ON "W", "H", "D", "K" AND HEAD ANGLE.
- ② ON SIZE 5 ONLY, COUNTERSINK TO A DEPTH TO BREAK CORNERS OF THE HEX DRIVE.
- ③ HEAD PROTRUSION MEASUREMENT IN ACCORDANCE WITH [D-11805](#), INSPECTION METHOD A.
- ④ TO DETERMINE THE GRIP LENGTH NUMBER, DIVIDE THE TOTAL THICKNESS OF PARTS BEING JOINED BY .0625. ROUND OFF DECIMALS TO NEXT LARGER WHOLE NUMBER.
- ⑤ THE TOLERANCE SHALL BE APPLIED TO A NOMINAL LENGTH DIMENSION DETERMINED BY ADDING THE NOMINAL GRIP LENGTH (GRIP LENGTH NUMBER TIMES .0625) AND "T" FROM [Table I](#).

- [6] THREADS PER [AS8879](#), CLASS UNJF-3A EXCEPT CLASS UNJC-3A FOR SIZE 5 (.1640-32). MAJOR DIAMETER SHALL CONFORM TO "TD".
- [7] END SHALL BE FLAT AND CHAMFERED PER [BPS-F-67](#).
- [8] SEE CODING UNDER USAGE AND APPLICATION FOR COMPLETE BOEING PART NUMBER.
- [9] THE "T" DIMENSION IS NOMINAL AND DOES NOT HAVE AN APPLIED TOLERANCE. DIMENSION "T" IS NOT TO BE INSPECTED, BUT IS USED IN CALCULATION OF NOMINAL BOLT LENGTH. [5]
- [10] MAXIMUM "D" DIAMETER MAY BE EXCEEDED BY .0002 FOR SOLID FILM LUBRICATED BOLTS.
- [11] PROCUREMENT OF IVD ALUMINUM PLATED (CODE LETTER "V") PARTS IS LIMITED TO THE SIZE RANGE SHOWN FOR EACH QUALIFIED SOURCE LISTED ON [BAC5315](#) QPL.
- [12] RUNOUT OF "D" DIAMETER TO THREAD PITCH DIAMETER SHALL BE WITHIN "Y" FIM WHEN HELD ON THE PITCH DIAMETER OF THE COMPLETE THREADS NEAREST THE SHANK AND CHECKED ON THE SHANK WITHIN ONE DIAMETER OF THE THREAD RUNOUT.
- [13] APPLY TOLERANCE TO A NOMINAL GRIP LENGTH DETERMINED BY MULTIPLYING THE GRIP LENGTH NUMBER BY .0625. GRIP LENGTH IS MEASURED FROM THE TOP OF THE HEAD TO THE END OF THE FULL CYLINDRICAL PORTION OF THE SHANK.
- [14] RESTRICTED USAGE: REPAIR ONLY.
- [15] OVERSIZE NOT AVAILABLE IN SIZE 5. TO REPLACE BACB30NW5() BOLTS, USE BACB30NW6() FOR FIRST OVERSIZE AND BACB30NW6()X FOR THE SECOND OVERSIZE.
- [16] SPS TECHNOLOGIES, KEARNS IS NO LONGER IN OPERATION. SIZES 5 THRU 20, MANUFACTURED AT THAT FACILITY (CAGE CODE 0PTK6) PRIOR TO JUNE 30, 2002 MAY BE PROCURED AND USED UNTIL STOCKS ARE DEPLETED.
- [17] HUCK LAKEWOOD (FORMERLY DEUTSCH FASTENER CORP) IS NO LONGER IN OPERATION. PARTS MANUFACTURED AT THAT FACILITY (CAGE CODE 97928) UNDER EITHER NAME PRIOR TO OCTOBER 1, 1999 MAY BE PROCURED AND USED UNTIL STOCKS ARE DEPLETED.
- [18] THE HEAD ANGLE SHALL BE 100 ± 1 DEGREES WHEN INSPECTED USING AN OPTICAL COMPARATOR.
- [19] PARTS WITH [BMS10-85](#), TYPE I, CLASS B COATING PRODUCED BEFORE DECEMBER 20, 2002 MAY BE SHIPPED FROM THE MANUFACTURER OR DISTRIBUTOR UNTIL JANUARY 1, 2004.
- [20] ALCOA FASTENING SYSTEMS (TEMPLE) (FORMERLY FAIRCHILD - TEMPLE) IS NO LONGER IN OPERATION. SIZES 5 THRU 16, MANUFACTURED AT THAT FACILITY UNDER EITHER NAME (CAGE CODE 06950) PRIOR TO SEPTEMBER 1, 2006 MAY BE PROCURED AND USED UNTIL STOCKS ARE DEPLETED.

- 21 FAIRCHILD FASTENERS (UNRUH) IS NOW ALCOA FASTENING SYSTEMS - UNRUH. THIS WAS A NAME CHANGE ONLY. SIZES 5 THRU 16, MANUFACTURED UNDER THE FAIRCHILD NAME MAY BE PROCURED AND USED UNTIL STOCKS ARE DEPLETED.
- 22 HUCK INTERNATIONAL INC (CARSON) IS NOW ALCOA FASTENING SYSTEMS - CARSON. THIS WAS A NAME CHANGE ONLY. SIZES 5 THRU 16, MANUFACTURED UNDER THE HUCK NAME MAY BE PROCURED AND USED UNTIL STOCKS ARE DEPLETED.
- 23 HI-SHEAR CORPORATION IS NOW LISI AEROSPACE - HI-SHEAR PRODUCTS. THIS WAS A NAME CHANGE ONLY. PARTS MANUFACTURED UNDER THE HI-SHEAR NAME MAY BE PROCURED AND USED UNTIL STOCKS ARE DEPLETED.

PROCUREMENT SPECIFICATION

[BPS-F-67](#), EXCEPT AS NOTED.

INSTALLATION FORCE SHALL BE INSPECTED PER [BMS10-85](#) (CODE "K", CLASS A ONLY). SAMPLE SIZE SHALL BE FIVE PIECES PER LOT.

MATERIAL

6Al-4V TITANIUM ALLOY PER [AMS4928](#) OR [AMS4967](#).

FINISH

CADMIUM PLATING PER [AMS-QQ-P-416](#), TYPE II, CLASS 2, EXCEPT A NICKEL STRIKE PER [AMS-QQ-N-290](#) (.00008 MAXIMUM THICKNESS) SHALL BE USED PRIOR TO CADMIUM PLATING.

ALUMINUM PIGMENTED COATING PER [BMS10-85](#), TYPE I, CLASS A. 19

PHOSPHATE FLUORIDE TREAT PER [BAC5861](#).

ION VAPOR DEPOSITED (IVD) ALUMINUM PLATING PER [BAC5315](#). 11

SURFACE TEXTURE

PER [ASME B46.1](#). HEAD TO SHANK FILLET, THREAD ROOT, THREAD FLANKS AND SHANK, 32 MICROINCHES Ra; BEARING SURFACE OF HEAD, 32 MICROINCHES Ra; OTHER SURFACES, 125 MICROINCHES Ra.

LUBRICATION

CETYL ALCOHOL PER [AS87132](#), TYPE I OR TYPE III, GRADE OPTIONAL.

SOLID FILM LUBRICANT PER [AS5272](#), TYPE I.

MARKING

MARK BOLT HEADS WITH MANUFACTURER'S BASIC NUMBER AND SYMBOL/ INSIGNIA PER [Table III](#), [MIL-HDBK-57](#), OR REGISTERED WITH THE U.S. PATENT AND TRADEMARK OFFICE (PTO) OF THE U.S. DEPARTMENT OF COMMERCE. MARKING WITH THE FIRST DASH NUMBER IS OPTIONAL. MARKING INDENTED .010 MAXIMUM, ARRANGEMENT OPTIONAL.

WHEN A COLOR CODE IS INDICATED IN [Table II](#), APPLY DYE OR PAINT OF THE SPECIFIED COLOR TO THE THREAD END OF THE BOLT. COVERAGE MAY INCLUDE THE CHAMFER PLUS ONE PITCH. APPLY COLOR PRIOR TO CETYL ALCOHOL LUBE OR AFTER SOLID FILM, AS APPLICABLE.

PROCUREMENT [16](#) [17](#) [20](#)

AIR INDUSTRIES CORP (CAGE CODE 06725)

ALCOA FASTENING SYSTEMS - CARSON (CAGE CODE 17446) [22](#)
(FOR SIZES 5 THRU 16 ONLY)

ALCOA FASTENING SYSTEMS - UNRUH (CAGE CODE 1RC86) [21](#)
(FOR SIZES 5 THRU 16 ONLY)

LISI AEROSPACE - HI-SHEAR PRODUCTS (CAGE CODE 73197) [23](#)

LISI AEROSPACE - BLANC AERO INDUSTRIES (RUGBY) (CAGE CODE U6300)
(FOR SIZES 5 THRU 16 ONLY, EXCEPT "R" AND "S" CODES)

LISI AEROSPACE - BLANC AERO INDUSTRIES (SAINT OUEN L'AUMONE) (CAGE CODE F0188) (FOR SIZES 5 THRU 18 ONLY, EXCEPT "R" AND "S" CODES)

SPS TECHNOLOGIES, AEROSPACE PRODUCTS DIV (JENKINTOWN) (CAGE CODE 56878)

SPS TECHNOLOGIES LTD, T.J. BROOKS DIV. (CAGE CODE K5673)
(FOR SIZES 5 THRU 12 ONLY)

WEST COAST AEROSPACE INC (CAGE CODE 60516)
(FOR SIZES 5 THRU 20 ONLY)

THE MANUFACTURERS LISTED IN [BPS-F-67SUP](#) AND THEIR AUTHORIZED DISTRIBUTORS ARE THE ONLY APPROVED SOURCES FOR THE ABOVE QUALIFIED PRODUCTS. SEE [BPS-F-67SUP](#) FOR PLANT ADDRESSES. NO CHANGES IN PRODUCT DESIGN, BASIC METHODS OF MANUFACTURE, PLANT SITE OR QUALITY LEVEL SHALL BE MADE WITHOUT PRIOR NOTIFICATION AND PRIOR APPROVAL IN WRITING FROM THE BOEING COMPANY. MANUFACTURERS OF COMPETITIVE PRODUCTS MAY APPLY TO A SUPPLIER MANAGEMENT DEPARTMENT OF THE BOEING COMPANY FOR QUALIFICATION. IF A MANUFACTURER IS SHOWN ON THIS STANDARD, BUT NOT LISTED IN THE SUPPLEMENT, CONTACT THE DIVISIONAL ENGINEERING STANDARDS FOCAL POINT OR ENGINEERING STANDARDS FOR VERIFICATION.

USAGE AND APPLICATION INFORMATION

THESE BOLTS AND MATING COLLARS, WITH COUNTERBORE, ARE DESIGNED SO THAT NOMINAL GRIP DIMENSION EQUALS MAXIMUM MATERIAL THICKNESS. WHEN MATERIAL THICKNESS EQUALS MINIMUM GRIP, .062 OF UNTHREADED SHANK ENTERS COUNTERBORE OF NUT. THIS DESIGN AVOIDS THREADS IN BEARING AND MAKES THE GRIP RANGE OF THIS FASTENER EQUAL TO THE GRIP RANGE OF SHEAR LOCKBOLTS OR HI-SHEAR RIVETS OF THE SAME DASH NUMBER.

OVERSIZE BOLTS, CODES "X" AND "Y", ARE TO BE USED AS REPLACEMENTS FOR NOMINAL SIZE BACB30NW BOLTS WITH THE SAME FINISH WHEN THE HOLE FOR THE NOMINAL SIZE BOLT IS OVERSIZE OR MUST BE MADE OVERSIZE TO CORRECT DAMAGE OR MISALIGNMENT.

FOR LIGHTWEIGHT VERSION OF THESE BOLTS IN SIZES 5 THRU 12, SEE [BACB30YP](#).

FOR SIMILAR PARTS MADE OF ALLOY STEEL AND CRES, SEE [BACB30FN](#).

INSTALL PER [BAC5004-2](#) OR [BAC5063-2](#), AS APPLICABLE.

DESIGN CAUTION

TEST DATA INDICATES THAT PHOSPHATE FLUORIDE COATED FASTENERS INSTALLED IN CARBON-EPOXY STRUCTURE CAN BE POTENTIALLY HARMFUL TO THE STRUCTURE IF EXPOSED TO A SALT ENVIRONMENT.

CODING

FIRST DASH NUMBER DESIGNATES NOMINAL THREAD SIZE PER [Table I](#).

FINISH AND LUBRICATION CODES FOLLOW THE FIRST DASH NUMBER. SEE [Table II](#).

SECOND DASH NUMBER DESIGNATES NOMINAL GRIP LENGTH IN .0625 INCREMENTS. [14](#) [15](#)


LETTER "X" FOLLOWING SECOND DASH NUMBER DESIGNATES .0156 OVERSIZE. [14](#) [15](#)

LETTER "Y" FOLLOWING SECOND DASH NUMBER DESIGNATES .0312 OVERSIZE. [14](#) [15](#)

TABLE II

BOEING STANDARD NUMBER BACB30NW	FINISH	LUBRICANT	COLOR CODE
()-()	NONE	CETYL ALCOHOL	NONE
()C()	CADMIUM PLATE	CETYL ALCOHOL	RED
()K()	ALUMINUM PIGMENTED COAT	CETYL ALCOHOL	BLACK
()R()	PHOSPHATE FLUORIDE	CETYL ALCOHOL	RED
()S()	PHOSPHATE FLUORIDE	SOLID FILM	RED
()V() 11	IVD ALUMINUM PLATE	CETYL ALCOHOL	RED

EXAMPLE OF PART NUMBER

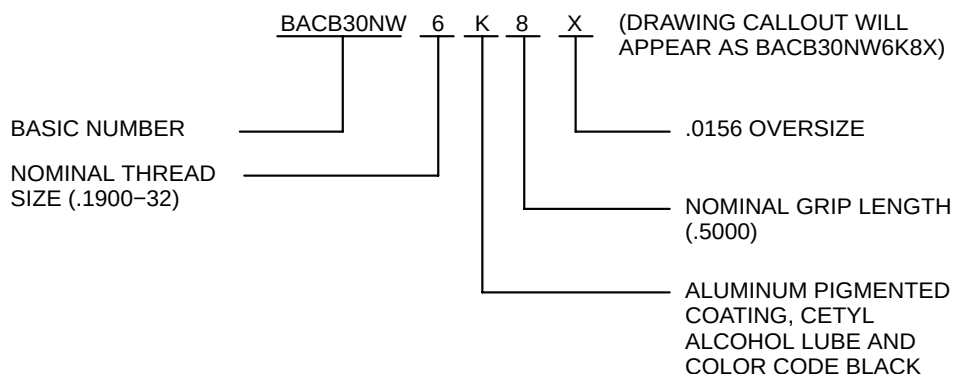

FASTENER CODE

SEE [BACD2074](#) FOR FASTENER CODES.

TABLE III

MANUFACTURER	MANUFACTURER'S BASIC NUMBER				HEAD MARKING SYMBOL/INSIGNIA
	NO FINISH ALUMINUM COAT PHOSPHATE FLUORIDE			CADMIUM PLATE	
	NOMINAL	.0156 OVERSIZE	.0312 OVERSIZE		
AIR INDUSTRIES	HL11V OR L-803	HL111V OR L-803X	HL411V OR L-803Y	HL511 OR L-803	
DEUTSCH	HL11V	HL111V	HL411V	HL511	DA OR DF
ALCOA - CARSON HUCK - CARSON HUCK - LAKEWOOD	HL11V	HL111V	HL411V	HL511	
ALCOA - UNRUH FAIRCHILD - UNRUH ALCOA - TEMPLE FAIRCHILD - TEMPLE	HL11V	HL111V	HL411V	HL511	VS OR O
LISI AEROSPACE HI-SHEAR	HL11V	HL111V	HL411V	HL511	HS
LISI AEROSPACE - RUGBY	HL11V	HL111V	HL411V	HL511	<u>hs</u>
LISI AEROSPACE - ST-OUEN L'AUMONE	HL11V	HL111V	HL411V	HL511	T
SPS- JENKINTOWN SPS- KEARNS	HL11V	HL111V	HL411V	HL511	SPS OR S
SPS - TJ BROOKS	HL11V	HL111V	HL411V	HL511	TBJ
WEST COAST	HL11V	HL111V	HL411V	HL511	WC
THE MANUFACTURER'S BASIC NUMBERS LISTED ARE FOR INTERCHANGEABILITY PURPOSES ONLY AND ARE NOT TO BE USED FOR DRAWING CALLOUT, PROCUREMENT OR RECEIVING INSPECTION PURPOSES EXCEPT FOR HEAD MARKING.					

D-590 NOTES

SEE [D-590-PREFACE](#) FOR INACTIVATION DEFINITIONS. SEE [00000-D-590-INFO](#) FOR LINKS TO SUPERSESSION CLASS DEFINITIONS AND FAQ.

INACTIVATION APPLICABILITY

- | | |
|-------------------------|---|
| BCA, BDS | <p>- BACB30NW() (), BACB30NW() ()X AND BACB30NW() ()Y ARE INACTIVE FOR DESIGN AND PROCUREMENT.
BACB30NW() () (), BACB30NW() () ()X AND BACB30NW() () ()Y ARE CLASS II SUPERSESSIONS, RESPECTIVELY.</p> <p>BACB30NW() ()L, BACB30NW() ()LX, AND BACB30NW() ()LY (LUBECO 2123) ARE INACTIVE FOR DESIGN AND PROCUREMENT.
NO SUPERSEDING PARTS.</p> |
| BCA | <p>- BACB30NW()C(), BACB30NW()C()X AND BACB30NW()C()Y ARE INACTIVE FOR DESIGN AND PROCUREMENT. BACB30NW()K(), BACB30NW()K()X AND BACB30NW()K()Y ARE CLASS V SUPERSESSIONS, RESPECTIVELY.</p> <p>BACB30NW(5 THRU 12)K() ARE INACTIVE FOR NEW DESIGN.</p> <p>BACB30NW()R() IS INACTIVE FOR NEW DESIGN.</p> <p>BACB30NW() (), BACB30NW() ()X, AND BACB30NW() ()Y ARE INACTIVE FOR DESIGN AND PROCUREMENT.
NO SUPERSEDING PARTS.
SEE BACB30NW()K(), BACB30NW()K()X, AND BACB30NW()K()Y, RESPECTIVELY.</p> <p>BACB30NW()V(), BACB30NW()V()X AND BACB30NW()V()Y ARE INACTIVE FOR DESIGN AND PROCUREMENT.
NO SUPERSEDING PARTS.</p> |
| BDS
(EXCEPTIONS: BH) | <p>BACB30NW()V(), BACB30NW()V()X AND BACB30NW()V()Y ARE INACTIVE FOR DESIGN AND PROCUREMENT.
BACB30NW()K(), BACB30NW()K()X AND BACB30NW()K()Y ARE CLASS V SUPERSESSIONS, RESPECTIVELY.</p> |
| BDS | <p>- BACB30NW()C(), BACB30NW()C()X AND BACB30NW()C()Y ARE INACTIVE FOR DESIGN AND PROCUREMENT.
NO SUPERSEDING PARTS.</p> |