

Cover Page

Standard: BACB30NX Rev: (BF) 30-Jul-2015

WARNING - The Export Control or Intellectual Property language on this page takes precedence over any such language that may appear on subsequent pages of this document.

No license is required for the dissemination of the commercial information contained herein to foreign persons other than those from or in the terrorist supporting countries identified in the United States Export Administration Regulations (EAR) (15 CFR 730-774). It is the responsibility of the individual in control of this data to abide by U.S. export laws.

ECCN EAR99

Boeing Proprietary, Distribution limited to Boeing employees and others covered by applicable proprietary information or nondisclosure agreements.

Copyright © 1992-1996, 2009, 2011, 2015 Boeing. All rights reserved.

Any reproduction of this document or portions thereof must also reproduce this page of the document.

BOEING PART STANDARD
THE BOEING COMPANY


BACB30NX

Revision BF
30 July 2015
Page 1 of 11

BOLT, PROTRUDING HEAD, HEX DRIVE, TENSION, 6AL-4V TITANIUM (NOMINAL AND OVERSIZE)

TECHNICAL CHANGES IDENTIFIED BY REVISION BAR.

FOR STATUS OF INACTIVATION SEE APPLICABILITY SECTION.

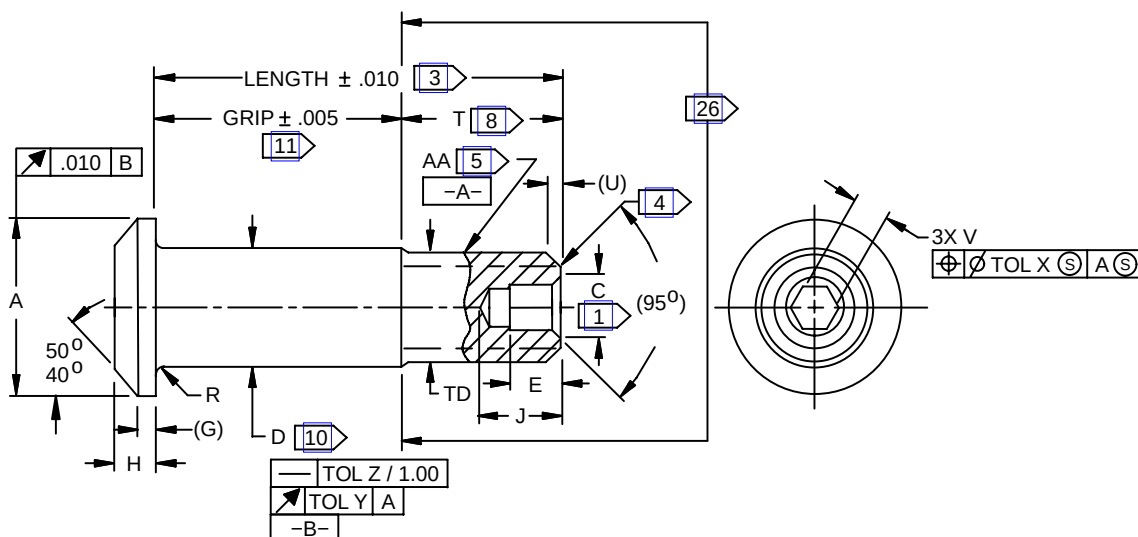

DIMENSIONING AND TOLERANCING PER [ANSI Y14.5M-1982](#).

DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED.

DIMENSIONS APPLY AFTER FINISH UNLESS OTHERWISE SPECIFIED.

TABLE I

BOEING STANDARD NUMBER BACB30NX [9]	AA THREAD SIZE PER AS8879 [5]	Ø A					
		NEW [17]					
		NOMINAL SIZE		.0156 OVERSIZE [16]		.0312 OVERSIZE [16]	
		MAX	MIN	MAX	MIN	MAX	MIN
5 [13]	.1640-32	.322	.306	---	---	---	---
5H [13]	.1640-32	.322	.306	---	---	---	---
6	.1900-32	.377	.357	.377	.357	.390	.370
8	.2500-28	.440	.415	.440	.415	.460	.435
10	.3125-24	.505	.475	.505	.485	.520	.500
12	.3750-24	.600	.565	.600	.580	.620	.600
14	.4375-20	.676	.641	.676	.651	.695	.670
16	.5000-20	.770	.735	.770	.745	.790	.765
18	.5625-18	.877	.842	.877	.842	.905	.870
20	.6250-18	.953	.905	.953	.905	.975	.940
24	.7500-16	1.150	1.110	1.150	1.110	1.185	1.145

TABLE I (Continued)

BOEING STANDARD NUMBER BACB30NX 9	Ø A						Ø C	
	OLD 18							
	NOMINAL SIZE		.0156 OVERSIZE 16		.0312 OVERSIZE 16			
	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
513	.322	.306	---	---	---	---	1	1
5H13	.322	.306	---	---	---	---	1	1
6	.377	.357	.377	.357	.390	.370	.119	.104
8	.440	.415	.440	.415	.460	.435	.142	.122
10	.505	.472	.505	.472	.520	.490	.180	.160
12	.600	.530	.600	.530	.620	.550	.217	.197
14	.676	.592	.676	.592	.695	.615	.253	.233
16	.770	.717	.770	.717	.790	.740	.289	.269
18	.877	.842	.877	.842	.905	.870	.326	.306
20	.953	.905	.953	.905	.975	.940	.326	.306
24	1.150	1.110	1.150	1.110	1.185	1.145	.398	.378

BOEING STANDARD NUMBER BACB30NX 9	Ø D							
	NOMINAL SIZE							
	BEFORE FINISH			AFTER FINISH			NO FINISH	
	CAD PLATE	CAD PLATE, IVD	ALUM COAT OR SOLID FILM	ALL 6	ALL EXCEPT PHOSPHATE FLUORIDE WITH CETYL	PHOSPHATE FLUORIDE WITH CETYL		
	MAX	MIN	MIN	MAX	MIN	MIN	MAX	MIN
5 13	.1625	.1619	.1621	.1635	.1625	.1630	.1635	.1630
5H 13	.1625	.1619	.1621	.1635	.1625	.1630	.1635	.1630
6	.1885	.1879	.1881	.1895	.1885	.1890	.1895	.1890
8	.2485	.2479	.2481	.2495	.2485	.2490	.2495	.2490
10	.3110	.3104	.3106	.3120	.3110	.3115	.3120	.3115
12	.3735	.3729	.3731	.3745	.3735	.3740	.3745	.3740
14	.4360	.4354	.4356	.4370	.4360	.4365	.4370	.4365
16	.4985	.4979	.4981	.4995	.4985	.4990	.4995	.4990
18	.5605	.5599	.5601	.5615	.5605	.5610	.5615	.5610
20	.6230	.6224	.6226	.6240	.6230	.6235	.6240	.6235
24	.7480	.7474	.7476	.7490	.7480	.7485	.7490	.7485

TABLE I (Continued)

BOEING STANDARD NUMBER BACB30NX 9	Ø D						
	.0156 OVERSIZE 16						
	BEFORE FINISH		AFTER FINISH			NO FINISH	
	IVD	ALUM COAT OR SOLID FILM	ALL 16	ALL EXCEPT PHOSPHATE FLUORIDE WITH CETYL	PHOSPHATE FLUORIDE WITH CETYL		
	MIN	MIN	MAX	MIN	MIN	MAX	MIN
5 13	---	---	---	---	---	---	---
5H 13	---	---	---	---	---	---	---
6	.2010	.2012	.2026	.2016	.2021	.2026	.2021
8	.2635	.2637	.2651	.2641	.2646	.2651	.2646
10	.3260	.3262	.3276	.3266	.3271	.3276	.3271
12	.3885	.3887	.3901	.3891	.3896	.3901	.3896
14	.4510	.4512	.4526	.4516	.4521	.4526	.4521
16	.5135	.5137	.5151	.5141	.5146	.5151	.5146
18	.5755	.5757	.5771	.5761	.5766	.5771	.5766
20	.6380	.6382	.6396	.6386	.6391	.6396	.6391
24	.7630	.7632	.7646	.7636	.7641	.7646	.7641

BOEING STANDARD NUMBER BACB30NX 9	Ø D						
	.0312 OVERSIZE 16						
	BEFORE FINISH		AFTER FINISH			NO FINISH	
	IVD	ALUM COAT OR SOLID FILM	ALL 16	ALL EXCEPT PHOSPHATE FLUORIDE WITH CETYL	PHOSPHATE FLUORIDE WITH CETYL		
	MIN	MIN	MAX	MIN	MIN	MAX	MIN
5 13	---	---	---	---	---	---	---
5H 13	---	---	---	---	---	---	---
6	.2166	.2168	.2182	.2172	.2177	.2182	.2177
8	.2791	.2793	.2807	.2797	.2802	.2807	.2802
10	.3416	.3418	.3432	.3422	.3427	.3432	.3427
12	.4041	.4043	.4057	.4047	.4052	.4057	.4052
14	.4666	.4668	.4682	.4672	.4677	.4682	.4677
16	.5291	.5293	.5307	.5297	.5302	.5307	.5302
18	.5911	.5913	.5927	.5917	.5922	.5927	.5922
20	.6536	.6538	.6552	.6542	.6547	.6552	.6547
24	.7786	.7788	.7802	.7792	.7797	.7802	.7797

TABLE I (Continued)

BOEING STANDARD NUMBER BACB30NX ⑨	E MIN		G REF	H		J MAX		R RAD		T ⑧
	OLD ⑫	NEW		MAX	MIN	OLD ⑫	NEW	MAX	MIN	
5⑬	.115	---	.030	.065	.055	.178	---	.025	.015	.312
5H⑬	---	.080	.030	.065	.055	---	.140	.025	.015	.312
6	.115	.080	.035	.074	.064	.178	.140	.025	.015	.325
8	.130	.090	.045	.090	.080	.200	.160	.025	.015	.395
10	.150	.110	.055	.112	.102	.240	.200	.030	.020	.500
12	.180	.140	.075	.140	.130	.275	.235	.030	.020	.545
14	.210	.170	.095	.160	.150	.315	.280	.030	.020	.635
16	.240	.200	.095	.188	.178	.360	.320	.030	.020	.685
18	.270	.240	.125	.210	.200	.400	.360	.040	.025	.770
20	.305	.240	.140	.238	.228	.440	.400	.045	.025	.825
24	.300	.300	.200	.335	.320	.465	.425	.045	.030	1.050

BOEING STANDARD NUMBER BACB30NX ⑨	Ø TD ⑤		U REF	V HEX ⑮		TOLERANCE		
	MAX	MIN		MAX	MIN	X	Y	Z
5⑬	.1595	.1570	.031	.0645	.0635	.010	.0045	.0040
5H⑬	.1595	.1570	.031	.0806	.0791	.010	.0045	.0040
6	.1840	.1810	.031	.0806	.0791	.010	.0045	.0040
8	.2440	.2410	.031	.0967	.0947	.010	.0045	.0030
10	.3060	.3020	.047	.1295	.1270	.012	.0045	.0030
12	.3680	.3640	.047	.1617	.1582	.014	.0060	.0025
14	.4310	.4260	.047	.1930	.1895	.017	.0060	.0025
16	.4930	.4880	.047	.2242	.2207	.020	.0060	.0025
18	.5550	.5500	.062	.2555	.2520	.023	.0060	.0020
20	.6180	.6120	.062	.2555	.2520	.025	.0080	.0020
24	.7430	.7370	.062	.3185	.3150	.030	.0080	.0020

NOTES

- ① ON SIZE 5 AND 5H ONLY, COUNTERSINK TO A DEPTH TO BREAK CORNERS OF THE DRIVE HEX.
- ② TO DETERMINE THE GRIP LENGTH NUMBER, DIVIDE THE TOTAL THICKNESS OF PARTS BEING JOINED BY .0625. ROUND OFF DECIMALS TO NEXT LARGER WHOLE NUMBER.
- ③ TOLERANCE IS APPLIED TO A NOMINAL LENGTH DETERMINED BY ADDING THE NOMINAL GRIP LENGTH (GRIP LENGTH NUMBER TIMES .0625) AND "T" FROM [Table I](#).

- ④ END SHALL BE FLAT AND CHAMFERED PER [BPS-F-67](#).
- ⑤ CLASS UNJF-3A, EXCEPT CLASS UNJC-3A FOR SIZE 5 (5 AND 5H). MAJOR DIAMETER SHALL CONFORM TO "TD".
- ⑥ MAXIMUM "D" DIAMETER MAY BE EXCEEDED BY .0002 FOR SOLID FILM LUBRICATED BOLTS.
- ⑦ PROCUREMENT OF IVD ALUMINUM PLATED (CODE LETTER "V") PARTS IS LIMITED TO THE SIZE RANGE SHOWN FOR EACH QUALIFIED SOURCE LISTED ON [BAC5315](#) QPL.
- ⑧ THE "T" DIMENSION IS NOMINAL AND DOES NOT HAVE AN APPLIED TOLERANCE. DIMENSION "T" IS NOT TO BE INSPECTED, BUT IS USED IN CALCULATION OF NOMINAL BOLT LENGTH. ③
- ⑨ SEE CODING UNDER USAGE AND APPLICATION FOR COMPLETE BOEING PART NUMBER.
- ⑩ RUNOUT OF "D" DIAMETER TO THREAD PITCH DIAMETER WITHIN "Y" FIM WHEN HELD ON THE PITCH DIAMETER OF THE COMPLETE THREADS NEAREST THE SHANK AND CHECKED ON THE SHANK WITHIN ONE DIAMETER OF THE THREAD RUNOUT.
- ⑪ APPLY TOLERANCE TO A NOMINAL GRIP LENGTH DETERMINED BY MULTIPLYING THE GRIP LENGTH NUMBER BY .0625. GRIP LENGTH IS MEASURED FROM THE BOTTOM OF THE HEAD TO THE END OF THE FULL CYLINDRICAL PORTION OF THE SHANK.
- ⑫ PARTS PRODUCED OR RELEASED FOR PRODUCTION PRIOR TO SEPTEMBER 25, 1995 MAY HAVE "E" AND "J" DIMENSIONS AND HEAD MARKING AS INDICATED.
- ⑬ NOMINAL SIZE ONLY. SIZE 5 NOT AVAILABLE IN OVERSIZE. SEE USAGE AND APPLICATION SECTION FOR OVERSIZE INFORMATION.
- ⑭ FORMERLY DEUTSCH FASTENER CORP. ALL LOTS PRODUCED AFTER JUNE 30, 1995 SHALL HAVE THE HUCK HEAD MARKING SYMBOL:  PARTS IN THE SYSTEM WITH THE OLD DEUTSCH HEAD MARKING SYMBOLS "DA" OR "DF" ARE ACCEPTABLE.
- ⑮ ENLARGED "V" HEX (-5 ONLY) IS IDENTIFIED BY CODE "H" FOLLOWING THE FIRST DASH NUMBER IN THE PART NUMBER (SEE EXAMPLE OF PART NUMBER).
- ⑯ RESTRICTED USAGE: REPAIR ONLY.
- ⑰ BOLTS RELEASED FOR PRODUCTION AFTER APRIL 22, 1996 SHALL CONFORM TO THESE HEAD DIAMETERS.
- ⑱ BOLTS IN STOCK OR IN PROCESS OF PRODUCTION ON OR BEFORE APRIL 22, 1996 MAY HAVE THESE "OLD" HEAD DIAMETERS. BOLTS WITH THE "OLD" HEAD DIAMETERS MAY BE PROCURED AND USED UNTIL STOCKS ARE DEPLETED.
- ⑲ OPTIONAL HL1012V HEAD MARKING IS ACCEPTABLE FOR PARTS PRODUCED BEFORE MAY 1, 1996.
- ⑳ PARTS WITH [BMS10-85](#), TYPE I, CLASS B COATING PRODUCED BEFORE OCTOBER 1, 1996 MAY BE SHIPPED FROM THE MANUFACTURER OR DISTRIBUTOR UNTIL JANUARY 1, 1998.

- [21] HUCK LAKEWOOD (FORMERLY DEUTSCH FASTENER CORP) IS NO LONGER IN OPERATION. PARTS MANUFACTURED AT THAT FACILITY (CAGE CODE 97928) UNDER EITHER NAME PRIOR TO OCTOBER 1, 1999 MAY BE PROCURED AND USED BY BOEING AND ITS SUBCONTRACTORS UNTIL STOCKS ARE DEPLETED.
- [22] FAIRCHILD FASTENERS (TEMPLE) IS NOW ALCOA FASTENING SYSTEMS - INDUSTRY (TEMPLE). THIS CHANGE WAS A NAME CHANGE ONLY. STOCK MANUFACTURED UNDER THE FAIRCHILD NAME MAY BE PROCURED AND USED UNTIL DEPLETED.
- [23] FAIRCHILD FASTENERS (UNRUH) IS NOW ALCOA FASTENING SYSTEMS - INDUSTRY (UNRUH). THIS CHANGE WAS A NAME CHANGE ONLY. STOCK MANUFACTURED UNDER THE FAIRCHILD NAME MAY BE PROCURED AND USED UNTIL DEPLETED.
- [24] HUCK INTERNATIONAL INC (CARSON) IS NOW ALCOA FASTENING SYSTEMS - CARSON. THIS CHANGE WAS A NAME CHANGE ONLY. STOCK MANUFACTURED UNDER THE HUCK NAME MAY BE PROCURED AND USED UNTIL DEPLETED.
- [25] SPS TECHNOLOGIES, KEARNS IS NO LONGER IN OPERATION. PARTS MANUFACTURED AT SPS TECHNOLOGIES, KEARNS OPERATIONS (CAGE CODE OPTK6) PRIOR TO JUNE 30, 2002 MAY BE RECEIVED BY BOEING AND ITS SUBCONTRACTORS UNTIL STOCK IS DEPLETED.
- [26] FOR "B" CODED PARTS ONLY. THREAD SURFACES INDICATED SHALL BE ALUMINUM PIGMENTED COATED (SEE FINISH SECTION). INCOMPLETE COVERAGE OF THE ALUMINUM PIGMENTED COATING IS ALLOWED ON THE RUNOUT THREADS STARTING FROM THE GRIP SECTION OF THE BOLT SHANK, EXTENDING INTO THE THREADS A MAXIMUM OF 0.030 INCH. NO OVERSPRAY IS ALLOWED ON THE BOLT SHANK. NO FINISH SHANK "D" DIMENSIONS APPLY.

PROCUREMENT SPECIFICATION

[BPS-F-67](#), EXCEPT AS NOTED.

INSTALLATION FORCE SHALL BE INSPECTED PER [BMS10-85](#) (CODE "K", CLASS A ONLY). SAMPLE SIZE SHALL BE FIVE PIECES PER LOT.

MATERIAL

6Al-4V TITANIUM ALLOY PER [AMS 4928](#) OR [AMS 4967](#).

FINISH

CADMIUM PLATING PER [AMS-QQ-P-416](#), TYPE II, CLASS 2, EXCEPT A NICKEL STRIKE PER [AMS-QQ-N-290](#) (.00008 MAXIMUM THICKNESS) SHALL BE USED PRIOR TO CADMIUM PLATING.

ALUMINUM PIGMENTED COATING PER [BMS10-85](#), TYPE I, CLASS A [20]

PHOSPHATE FLUORIDE TREAT PER [BAC5861](#).

ION VAPOR DEPOSITED (IVD) ALUMINUM PLATING PER [BAC5315](#). [7]

SURFACE TEXTURE

PER [ASME B46.1](#). HEAD TO SHANK FILLET, THREAD ROOT, THREAD FLANKS AND SHANK, AND BEARING SURFACE OF HEAD, 32 MICROINCHES Ra; OTHER SURFACES, 125 MICROINCHES Ra.

LUBRICATION

CETYL ALCOHOL PER [AS87132](#), TYPE I OR TYPE III, GRADE OPTIONAL.

SOLID FILM PER [AS5272](#), TYPE I.

MARKING

MARK BOLT HEADS WITH MANUFACTURER'S BASIC NUMBER AND SYMBOL/ INSIGNIA PER [Table III](#), [MIL-HDBK-57](#), OR REGISTERED WITH THE U.S. PATENT AND TRADEMARK OFFICE (PTO) OF THE U.S. DEPARTMENT OF COMMERCE. MARKING WITH THE FIRST DASH NUMBER IS OPTIONAL. MARKING INDENTED .010 MAXIMUM, ARRANGEMENT OPTIONAL.

DYE OR PAINT MARKING; APPLY COLOR CODE TO CHAMFERED END OF BOLT AS SHOWN IN [Table II](#). APPLY COLOR BEFORE CETYL ALCOHOL AND AFTER SOLID FILM LUBRICATION, AS APPLICABLE. COVERAGE OF DYE OR PAINT MAY INCLUDE CHAMFER PLUS ONE THREAD PITCH.

PROCUREMENT

AIR INDUSTRIES CORP (CAGE CODE 06725)

ALCOA FASTENING SYSTEMS - CARSON (CAGE CODE 17446) [\[24\]](#)
(FOR SIZES 5, 5H THRU 16 ONLY)

ALCOA FASTENING SYSTEMS - INDUSTRY (TEMPLE) (CAGE CODE 06950) [\[22\]](#)
(FOR SIZES 5, 5H THRU 12 ONLY)

ALCOA FASTENING SYSTEMS - INDUSTRY (UNRUH) (CAGE CODE 1RC86) [\[23\]](#)
(FOR SIZES 5, 5H THRU 12 ONLY)

LISI AEROSPACE - HI-SHEAR PRODUCTS (CAGE CODE 73197)

LISI AEROSPACE - BLANC AERO INDUSTRIES (RUGBY) (CAGE CODE U6300) (FOR SIZES 5 THRU 16 ONLY, EXCEPT "R" AND "S" CODES)

LISI AEROSPACE - BLANC AERO INDUSTRIES (SAINT OUVEN L'AUMONE) (CAGE CODE F0188) (EXCEPT "R" AND "S" CODES)

HUCK INTERNATIONAL INC, LAKEWOOD OPERATIONS (CAGE CODE 97928) [\[21\]](#)

SPS TECHNOLOGIES, AEROSPACE PRODUCTS DIV (JENKINTOWN) (CAGE CODE 56878)

SPS TECHNOLOGIES, AEROSPACE PRODUCTS DIV (KEARNS) (CAGE CODE 0PTK6) [\[25\]](#)
(FOR SIZES 5, 5H THRU 20 ONLY)

SPS TECHNOLOGIES LTD, T.J. BROOKS DIV. (CAGE CODE K5673)
(FOR SIZES 5, 5H THRU 12 ONLY)

WEST COAST AEROSPACE, INC (CAGE CODE 60516)
(FOR SIZES 5, 5H THRU 20 ONLY)

THE MANUFACTURERS LISTED IN [BPS-F-67SUP](#) AND THEIR AUTHORIZED DISTRIBUTORS ARE THE ONLY APPROVED SOURCES FOR THE ABOVE QUALIFIED PRODUCTS. SEE [BPS-F-67SUP](#) FOR PLANT ADDRESSES. NO CHANGES IN PRODUCT DESIGN, BASIC METHODS OF MANUFACTURE, PLANT SITE OR QUALITY LEVEL SHALL BE MADE WITHOUT PRIOR NOTIFICATION AND PRIOR APPROVAL IN WRITING FROM THE BOEING COMPANY. MANUFACTURERS OF COMPETITIVE PRODUCTS MAY APPLY TO A SUPPLIER MANAGEMENT DEPARTMENT OF THE BOEING COMPANY FOR QUALIFICATION. IF A MANUFACTURER IS SHOWN ON THIS STANDARD, BUT IS NOT LISTED IN THE SUPPLEMENT, CONTACT THE DIVISIONAL ENGINEERING STANDARDS FOCAL POINT OR ENGINEERING STANDARDS FOR VERIFICATION.

PATENT NOTICE:

THIS IS A MANUFACTURER-DESIGNED PRODUCT. BOEING MAKES NO REPRESENTATION WHATEVER REGARDING PATENT OR OTHER RIGHTS AFFECTING THE PRODUCT. THE LISTING OF ANY SUPPLIER DOES NOT IMPLY ANY DETERMINATION BY THE BOEING COMPANY OR BY ANY OTHER LISTED MANUFACTURER AS TO THE RIGHTS OF SUCH MANUFACTURER.

USAGE AND APPLICATION INFORMATION

OVERSIZE BOLTS ARE TO BE USED AS REPLACEMENTS FOR STANDARD SIZE BACB30NX BOLTS WITH THE SAME FINISH AND WHEN THE HOLE FOR THE STANDARD SIZE BOLT IS OVERSIZE OR MUST BE MADE OVERSIZE TO CORRECT DAMAGE OR MISALIGNMENT. FOR FIRST OVERSIZE FOR BACB30NX5(), USE BACB30NX6() AND FOR SECOND OVERSIZE, USE BACB30NX6()X.

INSTALL PER [BAC5004-2](#) OR [BAC5063-2](#), AS APPLICABLE.

FOR SIMILAR PARTS MADE OF ALLOY STEEL AND A286 CRES, SEE [BACB30MB](#).

DO NOT USE BACB30NX()-() (BARE, NO FINISH) WITH THREADED TORQUE-OFF COLLARS OR LOCKNUTS (FOR EXAMPLE, [BACC30AB](#) OR [BACN10YT](#)) DUE TO THREAD GALLING.

BACB30NX()-() IS TO BE USED ONLY WITH [BACC30CT](#) SWAGE COLLARS FOR AUTOMATIC ASSEMBLY OPERATIONS.

DESIGN CAUTION

TEST DATA INDICATES THAT PHOSPHATE FLUORIDE COATED FASTENERS INSTALLED IN CARBON-EPOXY STRUCTURE CAN BE POTENTIALLY HARMFUL TO THE STRUCTURE IF EXPOSED TO A SALT ENVIRONMENT.

CODING

FIRST DASH NUMBER DESIGNATES NOMINAL THREAD SIZE PER [Table I](#).

LETTER "H" FOLLOWING FIRST DASH NUMBER (SIZE 5 ONLY) DESIGNATES ENLARGED "V" HEX.

FINISH AND LUBRICATION CODES FOLLOW THE FIRST DASH NUMBER. SEE [Table II](#).

SECOND DASH NUMBER DESIGNATES NOMINAL GRIP LENGTH IN .0625 INCREMENTS. 

BACB30NX

Revision BF

Page 8 of 11


LETTER "X" FOLLOWING SECOND DASH NUMBER DESIGNATES .0156 OVERSIZE.
[13] [16]

LETTER "Y" FOLLOWING SECOND DASH NUMBER DESIGNATES .0312 OVERSIZE.
[13] [16]

TABLE II

BOEING STANDARD NUMBER BACB30NX	FINISH	LUBRICANT	COLOR CODE
()-()	NONE	CETYL ALCOHOL	NONE
()C()	CADMIUM PLATE	CETYL ALCOHOL	RED
()K()	ALUMINUM PIGMENTED COAT [20]	CETYL ALCOHOL	BLACK
()R()	PHOSPHATE FLUORIDE	CETYL ALCOHOL	RED
()S()	PHOSPHATE FLUORIDE	SOLID FILM	RED
()V() [7]	IVD ALUMINUM PLATE	CETYL ALCOHOL	RED
()B()	NONE EXCEPT THREADS ALUMINUM PIGMENTED COATED. [26]	CETYL ALCOHOL	WHITE

EXAMPLE OF PART NUMBER

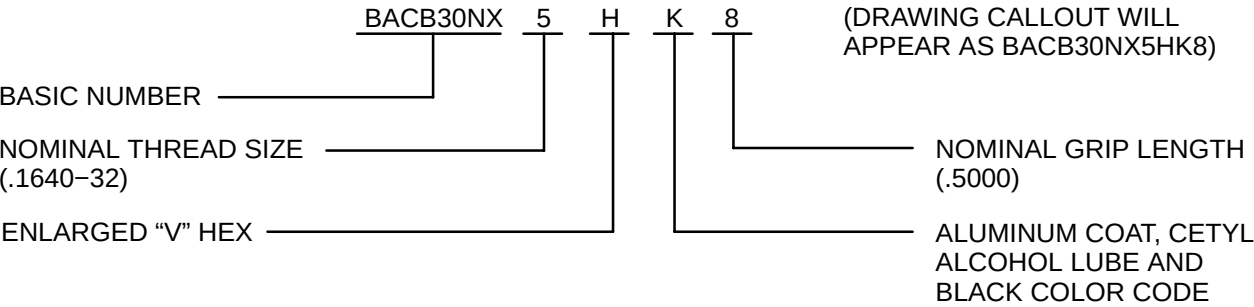

FASTENER CODE

SEE [BACD2074](#) FOR FASTENER CODES.

TABLE III

MANUFACTURER	MANUFACTURER'S BASIC NUMBER							HEAD MARKING SYMBOL/ INSIGNIA
	NOMINAL			OVERSIZE				
	NO FINISH, ALUM COAT OR PLATE, PHOSPHATE FLUORIDE		CADMIUM PLATE	.0156		.0312		
	 OLD	NEW		 OLD	NEW	 OLD	NEW	
AIC	HL12V OR L-802	HL1012	HL512 OR L-802	HL112V OR L-802X	HL1022	HL412V OR L-802Y	HL1032	
ALCOA FASTENING SYSTEMS	HL12V	HL1012 OR HL1012V 	HL512	HL112V	HL1022	HL412V	HL1032	VS OR O
LISI AEROSPACE -HI-SHEAR PRODUCTS	HL12V	HL1012	HL512	HL112V	HL1022	HL412V	HL1032	HS
LISI AEROSPACE -RUGBY	HL12V	HL1012	HL512	HL112V	HL1022	HL412V	HL1032	<u>hs</u>
LISI AEROSPACE - ST-OUEN L'AUMONE	HL12V	HL1012	HL512	HL112V	HL1022	HL412V	HL1032	T
HUCK	HL12V	HL1012	HL512	HL112V	HL1022	HL412V	HL1032	 
SPS	HL12V	HL1012	HL512	HL112V	HL1022	HL412V	HL1032	SPS OR S
SPS - TJ BROOKS	HL12V	HL1012	HL512	HL112V	HL1022	HL412V	HL1032	TBJ
WEST COAST	HL12V	HL1012	HL512	HL112V	HL1022	HL412V	HL1032	WC
THE MANUFACTURER'S BASIC NUMBERS LISTED ARE FOR INTERCHANGEABILITY PURPOSES ONLY AND ARE NOT TO BE USED FOR DRAWING CALLOUT, PROCUREMENT OR RECEIVING INSPECTION PURPOSES EXCEPT FOR HEAD MARKING.								

D-590 NOTES

SEE [D-590-PREFACE](#) FOR INACTIVATION DEFINITIONS. SEE [00000-D-590-INFO](#) FOR LINKS TO SUPERSESSION CLASS DEFINITIONS AND FAQ.

INACTIVATION APPLICABILITY

- BCA, BDS - BACB30NX(-)(-)L, BACB30NX(-)(-)LX AND BACB30NX(-)(-)LY (LUBECO 2123) ARE INACTIVE FOR DESIGN AND PROCUREMENT.NO SUPERSEDING PARTS.
- BACB30NX()(), BACB30NX()()X AND BACB30NX()()Y ARE INACTIVE FOR DESIGN AND PROCUREMENT.
- BACB30NX(-)(-), BACB30NX(-)(-)X AND BACB30NX(-)(-)Y ARE CLASS II SUPERSESSIONS, RESPECTIVELY.
- BACB30NX5(ALL CODES)() ARE INACTIVE FOR DESIGN AND PROCUREMENT.
- BACB30NX5H(ALL CODES)() ARE CLASS II SUPERSESSIONS, RESPECTIVELY.

- BCA, BDS
(EXCEPTIONS: BH) - BACB30NX()V(), BACB30NX()V()X AND BACB30NX()V()Y ARE INACTIVE FOR DESIGN AND PROCUREMENT.
NO SUPERSEDING PARTS.
- BCA - BACB30NX()R() IS INACTIVE FOR NEW DESIGN.

BACB30NX()C(), BACB30NX()C()X AND BACB30NX()C()Y ARE INACTIVE FOR DESIGN AND PROCUREMENT.
BACB30NX()K(), BACB30NX()K()X AND BACB30NX()K()Y ARE CLASS V SUPERSESSIONS, RESPECTIVELY.
- BDS
(EXCEPTIONS: BH) - BACB30NX()C(), BACB30NX()C()X AND BACB30NX()C()Y ARE INACTIVE FOR DESIGN AND PROCUREMENT.
NO SUPERSEDING PARTS.
- BH - BACB30NX()R(), BACB30NX()R()X AND BACB30NX()R()Y ARE INACTIVE FOR DESIGN AND PROCUREMENT.
BACB30NX()-(), BACB30NX()-()X AND BACB30NX()-()Y ARE CLASS II SUPERSESSIONS, RESPECTIVELY.

BACB30NX()C(), BACB30NX()C()X AND BACB30NX()C()Y ARE INACTIVE FOR DESIGN AND PROCUREMENT.
BACB30NX()K(), BACB30NX()K()X AND BACB30NX()K()Y ARE CLASS V SUPERSESSIONS, RESPECTIVELY.

BACB30NX()S(), BACB30NX()S()X AND BACB30NX()S()Y ARE INACTIVE FOR DESIGN AND PROCUREMENT.
NO SUPERSEDING PARTS. SEE BACB30NX()K(), BACB30NX()K()X AND BACB30NX()K()Y, RESPECTIVELY.

BACB30NX()V(), BACB30NX()V()X AND BACB30NX()V()Y ARE INACTIVE FOR DESIGN AND PROCUREMENT.
NO SUPERSEDING PARTS. SEE BACB30NX()K(), BACB30NX()K()X AND BACB30NX()K()Y, RESPECTIVELY.