

Cover Page

Standard: BACB30VH Rev: (L) 25-Jul-2005

WARNING - The Export Control or Intellectual Property language on this page takes precedence over any such language that may appear on subsequent pages of this document.

No license is required for the dissemination of the commercial information contained herein to foreign persons other than those from or in the terrorist supporting countries identified in the United States Export Administration Regulations (EAR) (15 CFR 730-774). It is the responsibility of the individual in control of this data to abide by U.S. export laws.

ECCN EAR99

Boeing Proprietary, Distribution limited to Boeing employees and others covered by applicable proprietary information or nondisclosure agreements.

Copyright © 1993-1994, 1997, 2005 Boeing. All rights reserved.

Any reproduction of this document or portions thereof must also reproduce this page of the document.

**FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK**

Copyright © Boeing. All rights reserved. See Cover Page.

***** PSDS GENERATED *****

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK**RESTRICTED USAGE: REPAIR ONLY****NOTES**

- 1 MAXIMUM DIAMETER OF BLIND HEAD "X" SHALL NOT EXCEED MAXIMUM DIAMETER OF MANUFACTURED HEAD ("A" DIAMETER).
- 2 NOMINAL GRIP LENGTH EQUALS GRIP LENGTH NUMBER (SECOND DASH NUMBER) TIMES .0625.
- 3 SEE "CODING" FOR COMPLETE BOEING PART NUMBER AND MATERIAL OPTIONS.
- 4 TO DETERMINE GRIP LENGTH NUMBER DIVIDE THE TOTAL THICKNESS OF THE PARTS BEING JOINED BY .0625. ROUND OFF DECIMALS TO THE CLOSEST WHOLE NUMBER.
- FOR ANY GIVEN GRIP DASH NUMBER THE BOLT CAN ACCOMMODATE A STACKUP EQUAL TO THE NOMINAL GRIP LENGTH $\pm .0312$. 2
- 5 "S" CODE APPLIES TO "05" AND "06" SIZES ONLY. UNLESS THE "S" IS DESIGNATED FOR THESE SIZES, PARTS RECEIVED WILL REQUIRE INSTALLATION BY A DOUBLE ACTION TOOL. SIZES "08", "10" AND "12" ARE ONLY AVAILABLE FOR INSTALLATION WITH A SINGLE ACTION TOOL. 7
- 6 "D" DIAMETER MAY BE .002 UNDERSIZE FOR LENGTH "P".
- 7 FOR SIZES "5" AND "6", CHOICE OF SINGLE OR DOUBLE ACTION INSTALLABLE PARTS ARE USER SHOP OPTIONS DEPENDING UPON TOOLING AVAILABLE.
- 8 $L \text{ (REFERENCE)} = \text{NOMINAL GRIP} + N$. 2
- 9 $C_{\max} = \text{NOMINAL GRIP} + M$.
- 10 HUCK INTERNATIONAL INC (TUCSON) IS NOW ALCOA FASTENING SYSTEMS – TUCSON. THIS CHANGE WAS A NAME CHANGE ONLY. STOCK MANUFACTURED UNDER THE HUCK NAME MAY BE PROCURED AND USED UNTIL DEPLETED.

DATE 13-JUL-1982 REV (L) 25-JUL-2005

CAGE CODE 81205

BACB30VH**SH 2**

**BOLT,
BLIND, HIGH STRENGTH, PULL TYPE,
PROTRUDING HEAD, ALLOY STEEL AND
A286 CRES (.0156 OVERSIZE)**

BACB30VH**SH 2**

***** PSDS GENERATED *****

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK**RESTRICTED USAGE: REPAIR ONLY****PROCUREMENT SPECIFICATION**

■ ALLOY STEEL BOLTS PER NASM81177; A286 CRES BOLTS PER NASM8975

MATERIAL

STEEL ("-" CODE):

- | | | |
|-------------|---|---|
| SLEEVE | - | 4027 OR 4037 ALLOY STEEL PER ASTM A 331 |
| PIN | - | 8740 ALLOY STEEL PER ASTM A 331 |
| LOCK COLLAR | - | MANUFACTURER'S OPTION: 1010, 1020, 1144, 4037 OR 4130 STEEL PER FED-STD-66; A286 CRES PER CHEMISTRY OF AMS 5737 OR 316 CRES PER CHEMISTRY OF AMS 5690 |
| CAP | - | CARBON STEEL (OPTIONAL, NOT PART OF INSTALLED FASTENER) |

CRES (CODES "C" & "CD"):

- | | | |
|--------------|---|---|
| SLEEVE & PIN | - | A286 CRES PER CHEMISTRY OF AMS 5737 |
| LOCK COLLAR | - | A286 CRES PER CHEMISTRY OF AMS 5737 OR 316 CRES PER CHEMISTRY OF AMS 5690 |
| CAP | - | CARBON STEEL (OPTIONAL, NOT PART OF INSTALLED FASTENER) |

FINISH

■ PASSIVATE CRES PER AMS 2700.

CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2 (CRES OR STEEL SLEEVES)
(CLEAR DICHROMATE ON CRES SLEEVES)

CADMIUM PLATE PER AMS-QQ-P-416, TYPE I, CLASS 3 (STEEL PINS)

LUBRICATION

- | | | |
|------------------|---|--|
| DASH ("-" CODE) | - | NONE, EXCEPT MANUFACTURER'S OPTION TO LUBRICATE MECHANICAL LOCK WITH LOX COMPATIBLE SOLID FILM LUBE PER DOD-L-85645. |
| CODES "C" & "CD" | - | WHEN LUBRICATED, USE MIL-L-46010, TYPE III, OR AS5272, TYPE I, MIL-L-87132, OR LOX COMPATIBLE SOLID FILM LUBE PER DOD-L-85645. |

DATE 13-JUL-1982 REV (L) 25-JUL-2005

CAGE CODE 81205

BACB30VH**SH 3**

**BOLT,
BLIND, HIGH STRENGTH, PULL TYPE,
PROTRUDING HEAD, ALLOY STEEL AND
A286 CRES (.0156 OVERSIZE)**

BACB30VH**SH 3**

***** PSDS GENERATED *****

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK**RESTRICTED USAGE: REPAIR ONLY****MARKING**

HEAD SHALL BE MARKED WITH MANUFACTURER'S SYMBOL PER MIL-HDBK-57, SECOND DASH NUMBER, "C" FOR CRES WHEN APPLICABLE, "O" FOR OVERSIZE, .010 MAXIMUM DEPTH. "S" CODED PARTS SHALL BE IDENTIFIED WITH A GREEN COLOR ON THE PINTAIL END OR ON MECHANICAL LOCK COLLAR FLANGE OR SHEAR CAP.

PROCUREMENT

ALCOA FASTENING SYSTEMS, HUCK AEROSPACE PRODUCTS, 3724 E COLUMBIA ST,
TUCSON AZ 85714-3415 (CAGE CODE 0HDW7) 

TEXTRON FASTENING SYSTEMS, 1224 E WARNER AVE, SANTA ANA, CA 92705-5414
(CAGE CODE 11815) (ALL CODES EXCEPT "C" AND "CD" CODE PARTS WITH DIAMETER
-12 AND "U" CODE PARTS WITH ALL DIAMETER SIZES)

THE MANUFACTURERS LISTED AND THEIR AUTHORIZED DISTRIBUTORS ARE THE ONLY
APPROVED SOURCES FOR THE ABOVE PRODUCTS. NO CHANGES IN PRODUCT
DESIGN, BASIC METHODS OF MANUFACTURE, PLANT SITE OR QUALITY LEVEL SHALL BE
MADE WITHOUT PRIOR NOTIFICATION AND PRIOR APPROVAL IN WRITING FROM THE
BOEING COMPANY. MANUFACTURERS OF COMPETITIVE PRODUCTS MAY APPLY TO A
SUPPLIER MANAGEMENT AND PROCUREMENT DEPARTMENT OF THE BOEING
COMPANY FOR APPROVAL.

DATE 13-JUL-1982 REV (L) 25-JUL-2005

CAGE CODE 81205

BACB30VH

SH 4

**BOLT,
BLIND, HIGH STRENGTH, PULL TYPE,
PROTRUDING HEAD, ALLOY STEEL AND
A286 CRES (.0156 OVERSIZE)**

BACB30VH

SH 4

***** PSDS GENERATED *****

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK**RESTRICTED USAGE: REPAIR ONLY****USAGE AND APPLICATION INFORMATION**

THESE PARTS ARE INTENDED AS REPLACEMENTS FOR MS21141 AND MS90354 PARTS WHEN THE HOLE IS OVERSIZE OR MUST BE MADE OVERSIZE FOR REPAIR PURPOSES.

TABLE II BCA SUPERSESSION INFORMATION

OBSOLETE PART NUMBERS	SUPERSEDING PART NUMBERS	CLASS
BACB30VH05-()	BACB30VH05-()S	II
BACB30VH05-()S	BACB30VW5A()UX	II
BACB30VH05-()SU	NONE	---
BACB30VH05-()U	NONE	---
BACB30VH05C()S	BACB30VW5C()UX	II
BACB30VH05C()	BACB30VW5C()UX	II
BACB30VH05CD()S	BACB30VW5P()UX	II
BACB30VH05CD()SU	NONE	---
BACB30VH05CD()U	NONE	---
BACB30VH05CD()	BACB30VW5P()UX	II
BACB30VH05C()SU	BACB30VW5-()UX	II
BACB30VH05C()U	BACB30VW5-()UX	II
BACB30VH06-()	BACB30VH06-()S	II
BACB30VH06-()S	BACB30VW6A()UX	II
BACB30VH06-()SU	NONE	---
BACB30VH06-()U	NONE	---
BACB30VH06C()S	BACB30VW6C()UX	II
BACB30VH06C()	BACB30VW6C()UX	II
BACB30VH06CD()S	BACB30VW6P()UX	II
BACB30VH06CD()SU	NONE	---
BACB30VH06CD()U	NONE	---
BACB30VH06CD()	BACB30VW6P()UX	II
BACB30VH06C()SU	BACB30VW6-()UX	II
BACB30VH06C()U	BACB30VW6-()UX	II
BACB30VH08-()	BACB30VW8A()UX	II

DATE 13-JUL-1982 REV (L) 25-JUL-2005

CAGE CODE 81205

BACB30VH**SH 5**

**BOLT,
BLIND, HIGH STRENGTH, PULL TYPE,
PROTRUDING HEAD, ALLOY STEEL AND
A286 CRES (.0156 OVERSIZE)**

BACB30VH**SH 5**

***** PSDS GENERATED *****

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK**RESTRICTED USAGE: REPAIR ONLY****TABLE II BCA SUPERSESSSION INFORMATION (CONTINUED)**

OBSOLETE PART NUMBERS	SUPERSEDING PART NUMBERS	CLASS
BACB30VH08-()U	NONE	---
BACB30VH08C()	BACB30VW8C()UX	II
BACB30VH08CD()	BACB30VW8P()UX	II
BACB30VH08CD()U	NONE	---
BACB30VH08C()U	BACB30VW8-()UX	II
BACB30VH10-()	BACB30VW10A()UX	II
BACB30VH10-()U	NONE	---
BACB30VH10C()	BACB30VW10C()UX	II
BACB30VH10CD()	BACB30VW10P()UX	II
BACB30VH10CD()U	NONE	---
BACB30VH10C()U	BACB30VW10-()UX	II
BACB30VH12-()	BACB30VW12A()UX	II
BACB30VH12-()U	NONE	---
BACB30VH12C()	BACB30VW12C()UX	II
BACB30VH12CD()	BACB30VW12P()UX	II
BACB30VH12CD()U	NONE	---
BACB30VH12C()U	BACB30VW12-()UX	II

DATE 13-JUL-1982 REV (L) 25-JUL-2005

CAGE CODE 81205

BACB30VH**SH 6**

**BOLT,
BLIND, HIGH STRENGTH, PULL TYPE,
PROTRUDING HEAD, ALLOY STEEL AND
A286 CRES (.0156 OVERSIZE)**

BACB30VH**SH 6**

***** PSDS GENERATED *****

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK**RESTRICTED USAGE: REPAIR ONLY****CODING**

FIRST DASH NUMBER (2 DIGITS) DESIGNATES NOMINAL DIAMETER.

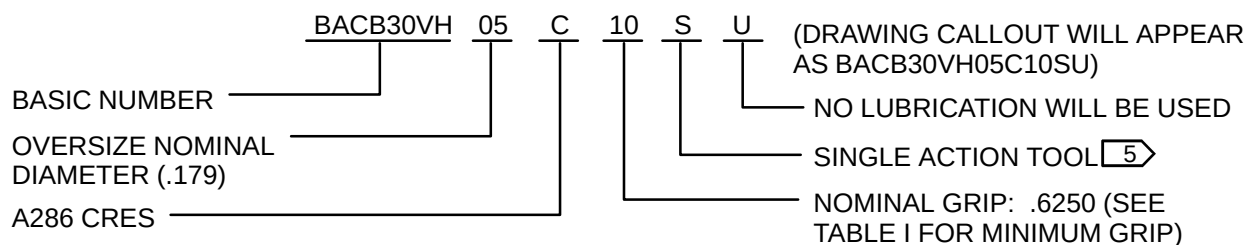
DASH ("—") FOLLOWING FIRST DASH NUMBER DESIGNATES ALLOY STEEL COLLAR AND SLEEVE, CADMIUM PLATED TYPE II CLASS 2, AND SERRATED PIN, CADMIUM PLATED TYPE I, CLASS 3.

LETTER "C" FOLLOWING FIRST DASH NUMBER DESIGNATES A286 CRES, PASSIVATED.

LETTERS "CD" FOLLOWING FIRST DASH NUMBER DESIGNATES A286 CRES, PASSIVATED, WITH SLEEVE CADMIUM PLATED TYPE II, CLASS 2, WITH CLEAR DICHROMATE.

SECOND DASH NUMBER (2 DIGITS) DESIGNATES NOMINAL GRIP LENGTH IN .0625 INCREMENTS. 4LETTER "S" FOLLOWING SECOND DASH NUMBER DESIGNATES BOLT INSTALLED WITH SINGLE ACTION TOOL. 5 7

LETTER "U" AT THE END OF THE PART NUMBER DESIGNATES AN UNLUBRICATED PART, WHICH IS SUITABLE FOR SPACE APPLICATIONS WHERE NON-OUTGASSING REQUIREMENTS APPLY.

EXAMPLE OF PART NUMBER

INSTALL PER BAC5004-3

SEE D-590-PREFACE (INDEX) FOR INACTIVATION DEFINITIONS. SEE D-590-SUPERSESSON-LIST FOR SUPERSESSON CLASS DEFINITIONS AND SUPERSESSON LIST.

INACTIVATION APPLICABILITY

- BCA -** BACB30VH IS INACTIVE FOR DESIGN AND PROCUREMENT. SEE TABLE II FOR SUPERSESSON INFORMATION.
- IDS, BH -** BACB30VH05()() AND BACB30VH06()() PARTS ARE INACTIVE FOR NEW DESIGN. SEE BACB30VH05()()S AND BACB30VH06()()S.

DATE 13-JUL-1982 REV (L) 25-JUL-2005

CAGE CODE 81205

BACB30VH

SH 7

BOLT,
BLIND, HIGH STRENGTH, PULL TYPE,
PROTRUDING HEAD, ALLOY STEEL AND
A286 CRES (.0156 OVERSIZE)

BACB30VH

SH 7