

Cover Page

Standard: BACC30BL Rev: (H) 21-Nov-2001

WARNING - The Export Control or Intellectual Property language on this page takes precedence over any such language that may appear on subsequent pages of this document.

No license is required for the dissemination of the commercial information contained herein to foreign persons other than those from or in the terrorist supporting countries identified in the United States Export Administration Regulations (EAR) (15 CFR 730-774). It is the responsibility of the individual in control of this data to abide by U.S. export laws.

ECCN EAR99


Boeing Proprietary, Distribution limited to Boeing employees and others covered by applicable proprietary information or nondisclosure agreements.

Copyright © 1989, 1995, 1999, 2001 Boeing. All rights reserved.

Any reproduction of this document or portions thereof must also reproduce this page of the document.

***** PSDS GENERATED *****

BCAG	F	BD&SG	F	BH	F				
NEW DESIGN APPROVAL: P=PARTIAL, F=FULL, N=NONE									

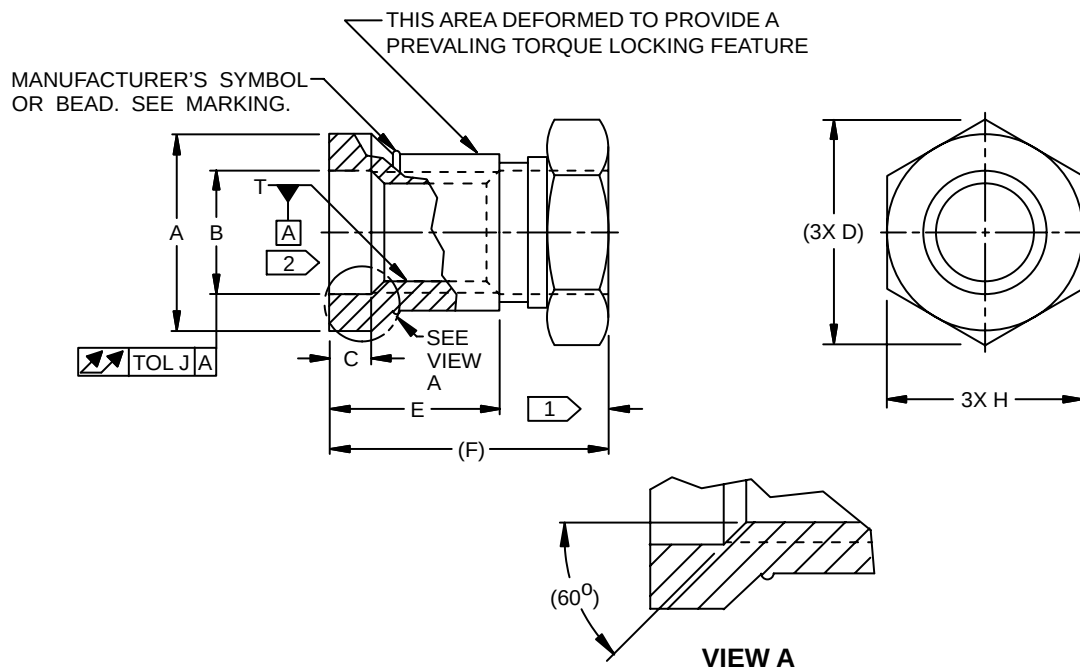

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED.
DIMENSIONS APPLY AFTER FINISHING AND BEFORE LUBRICATION.

TABLE I

BOEING STANDARD NUMBER BACC30BL ③	T NOMINAL THREAD SIZE MIL-S-8879 ⑥	Ø A		Ø B		C				D REF
						OLD ④		NEW		
		MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	
5	.1640-32	.292	.288	.173	.169	.088	.080	.104	.098	.344
6	.1900-32	.307	.303	.200	.196					.380
8	.2500-28	.412	.408	.261	.257	.092	.084		.097	.484
10	.3125-24	.518	.512	.325	.319	.094	.086			.557
12	.3750-24	.628	.622	.388	.382	.096	.088			

TECHNICAL CHANGES IDENTIFIED BY REVISION BAR.

DATE 10-MAY-1983 REV (H) 21-NOV-2001

CAGE CODE 81205

BACC30BL

**COLLAR,
PRELOAD, SHEAR, 7075-T73 ALUMINUM
ALLOY (FOR LIGHTWEIGHT HEX DRIVE
SHEAR BOLTS)**

BAC C30BL
SH 1 OF 4

***** PSDS GENERATED *****

TABLE I (CONTINUED)

BOEING STANDARD NUMBER BACC30BL 3	E MAX		F		H		TOL J	TORQUE-OFF INCH-LBS
	OLD 4	NEW	OLD MAX 4	NEW REF	MAX	MIN		
5	.220	.240	.397	.417	.314	.302	.005	15 – 25
6	.230	.250	.407	.427	.346	.332		25 – 35
8	.270	.275	.477	.482	.440	.425		60 – 80
10	.315	.328	.557	.570				110 – 140
12	.355	.368	.627	.640	.503	.488	.006	160 – 200

NOTES

- ① THIS PORTION OF COLLAR MUST TWIST OFF WITHIN TORQUE-OFF VALUES LISTED IN TABLE I.
- ② GO THREAD GAGE MINIMUM PENETRATION SHALL BE THREE FOURTHS OF ONE REVOLUTION.
- ③ FOR COMPLETE BOEING PART NUMBER SEE CODING.
- ④ PARTS PRODUCED OR RELEASED FOR PRODUCTION (AT THE SUPPLIER'S FACILITY) PRIOR TO AUGUST 1, 1999 MAY HAVE "C", "E" AND "F" DIMENSIONS AND MANUFACTURER'S BASIC PART NUMBER AS INDICATED IN COLUMNS IDENTIFIED BY ④.
- ⑤ FAIRCHILD WILL USE BOEING PART NUMBER BACC30BL
- ⑥ UNJF-3B THREADS PER MIL-S-8879; EXCEPT SIZE .1640-32 (SIZE 5) HAS UNJC-3B THREAD.

PROCUREMENT SPECIFICATION

BPS-F-68, EXCEPT AS NOTED.

MATERIAL

7075-ALUMINUM ALLOY PER AMS-QQ-A-225/9.

HEAT TREATMENT

T73 CONDITION PER BPS-F-68.

DATE 10-MAY-1983 REV (H) 21-NOV-2001

CAGE CODE 81205

BACC30BL

SH 2

COLLAR,
PRELOAD, SHEAR, 7075-T73 ALUMINUM
ALLOY (FOR LIGHTWEIGHT HEX DRIVE
SHEAR BOLTS)

BACC30BL

SH 2

***** PSDS GENERATED *****

FINISH

ANODIZE PER MIL-A-8625, TYPE II, CLASS 2, COLOR: ORANGE.

LUBRICATION

CETYL ALCOHOL PER BPS-F-68.

MARKING

PARTS SHALL BE MARKED WITH THE MANUFACTURER'S SYMBOL PER MIL-HDBK-57, RAISED OR DEPRESSED .010 MAXIMUM, OR HAVE BEADS IN THE AREA INDICATED. NO BEAD FOR HI-SHEAR, ONE BEAD FOR FAIRCHILD, TWO BEADS FOR SPS.

PACKAGING

PARTS MAY BE ORDERED BULK PACKAGED OR MOUNTED ON SPINDLES SUITABLE FOR USE WITH AUTOMATED TOOLING. UNLESS OTHERWISE REQUESTED, PARTS SHALL BE ORDERED IN BULK PACKAGES. TO REQUEST PARTS MOUNTED ON SPINDLES, FOR AUTOMATIC LOADING ADD THE CODE "ALB" OR "ALH" TO THE END OF THE PART NUMBER. "ALB" DESIGNATES COLLARS THAT ARE LOADED BASE END FIRST INTO THE TOOL. "ALH" DESIGNATES COLLARS THAT ARE LOADED HEX END FIRST INTO THE TOOL. THE "ALB" AND "ALH" CODES ARE ONLY FOR PROCUREMENT AND INVENTORY PURPOSES. THE METHOD OF PACKAGING SHALL NOT BE SPECIFIED ON THE ENGINEERING DRAWING.

PROCUREMENT

FAIRCHILD FASTENERS, SOUTH BAY OPERATIONS (CAGE CODE 5M902).

HI-SHEAR CORP (CAGE CODE 73197).

SPS TECHNOLOGIES INC, AEROSPACE PRODUCTS DIV (CAGE CODE 56878).

THE MANUFACTURERS LISTED IN BPS-F-68SUP AND THEIR AUTHORIZED DISTRIBUTORS ARE THE ONLY APPROVED SOURCES FOR THE ABOVE QUALIFIED PRODUCTS. SEE BPS-F-68SUP FOR PLANT ADDRESSES. NO CHANGES IN PRODUCT DESIGN, BASIC METHODS OF MANUFACTURE, PLANT SITE OR QUALITY LEVEL SHALL BE MADE WITHOUT PRIOR NOTIFICATION AND PRIOR APPROVAL IN WRITING FROM THE BOEING COMPANY. MANUFACTURERS OF COMPETITIVE PRODUCTS MAY APPLY TO A SUPPLIER MANAGEMENT AND PROCUREMENT DEPARTMENT OF THE BOEING COMPANY FOR QUALIFICATION. IF A MANUFACTURER IS SHOWN ON THIS STANDARD, BUT NOT LISTED IN THE SUPPLEMENT, CONTACT THE DIVISIONAL ENGINEERING STANDARDS FOCAL POINT OR ENGINEERING STANDARDS FOR VERIFICATION.

THIS IS A MANUFACTURER-DESIGNED PRODUCT. BOEING MAKES NO REPRESENTATION WHATEVER REGARDING PATENT OR ANY OTHER RIGHTS AFFECTING THE PRODUCT. THE LISTING OF ANY SUPPLIER DOES NOT IMPLY ANY DETERMINATION BY THE BOEING COMPANY OR BY ANY OTHER LISTED MANUFACTURER AS TO THE RIGHTS OF SUCH MANUFACTURER.

DATE 10-MAY-1983 REV (H) 21-NOV-2001

CAGE CODE 81205

BACc30BL**SH 3**

**COLLAR,
PRELOAD, SHEAR, 7075-T73 ALUMINUM
ALLOY (FOR LIGHTWEIGHT HEX DRIVE
SHEAR BOLTS)**

BACc30BL**SH 3**

USAGE AND APPLICATION INFORMATION

Copyright © Boeing. All rights reserved. See Cover Page.