

Cover Page

Standard: BACC30BS Rev: (T) 10-Jul-2014

WARNING - The Export Control or Intellectual Property language on this page takes precedence over any such language that may appear on subsequent pages of this document.

No license is required for the dissemination of the commercial information contained herein to foreign persons other than those from or in the terrorist supporting countries identified in the United States Export Administration Regulations (EAR) (15 CFR 730-774). It is the responsibility of the individual in control of this data to abide by U.S. export laws.


ECCN EAR99

Boeing Proprietary, Distribution limited to Boeing employees and others covered by applicable proprietary information or nondisclosure agreements.

Copyright © 2006, 2014 Boeing. All rights reserved.

Any reproduction of this document or portions thereof must also reproduce this page of the document.

BCA	F	BDS	F							
NEW DESIGN APPROVAL: P=PARTIAL, F=FULL, N=NONE										



MANUFACTURER'S SYMBOL OR
.010 RADIUS (REF) BEAD. SEE
MARKING REQUIREMENT.

(A')

(L)


(M)

(N)

(.010) THICK

5

1

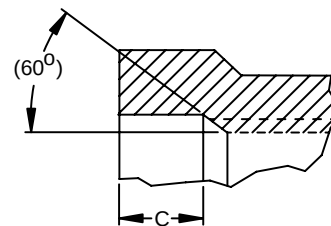**COLLAR/WASHER**

TECHNICAL CHANGES IDENTIFIED BY REVISION BAR.

CAGE CODE 81205

BACC30BS

Copyright © Boeing. All rights reserved. See Cover Page.

***** PSDS GENERATED *****

TABLE I

BOEING STANDARD NUMBER BACC30BS ③	T NOMINAL THREAD SIZE ⑥	Ø A		Ø A' REF	Ø B		C ④			
							OLD		NEW	
		MAX	MIN		MAX	MIN	MAX	MIN	MAX	MIN
5	.1640-32	.287	.283	.320	.173	.169	.088	.080	.104	.098
6	.1900-32	.307	.303	.340	.212	.208				.097
8	.2500-28	.412	.408	.440	.276	.272	.092	.084		
10	.3125-24	.518	.512	.550	.340	.334	.094	.086		
12	.3750-24	.628	.622	.660	.403	.397	.096	.088		

TABLE I (CONTINUED)

BOEING STANDARD NUMBER BACC30BS ③	D REF	E ④		F ④		H HEXAGON		TOL J	K MIN	L REF ④	
		OLD	NEW MAX	OLD ±.010	NEW REF	MAX	MIN			OLD	NEW
5	.250	.220	.240	.415	.417	.220	.213	.005	.100	.100	.118
6	.280	.230	.250	.425	.427	.251	.244				.117
8	.350	.270	.275	.515	.482	.314	.302		.105	.105	
10	.420	.315	.328	.615	.570	.377	.365		.110	.110	
12	.490	.355	.368	.685	.640	.439	.425	.006			

TABLE I (CONTINUED)

BOEING STANDARD NUMBER BACC30BS ③	M REF ④		N REF ④		TORQUE-OFF INCH-LBS
	OLD	NEW	OLD	NEW	
5	.235	.255	.440	.460	15 - 25
6	.245	.265	.450	.470	25 - 35
8	.285	.290	.540	.560	60 - 80
10	.330	.343	.640	.660	130 - 160
12	.370	.383	.710	.730	200 - 240

NOTES

① THIS PORTION OF COLLAR MUST TWIST OFF WITHIN TORQUE-OFF VALUES LISTED IN TABLE I.

DATE 27-MAR-1986 REV (T) 10-JUL-2014

CAGE CODE 81205

BACC30BS

SH 2

COLLAR, REDUCED HEX, PRELOAD, SHEAR,
CRES (FOR LIGHTWEIGHT HEX DRIVE
BOLTS, STANDARD OR .0156 OVERSIZE)

BACC30BS

SH 2

BOEING PART STANDARD

***** PSDS GENERATED *****

NOTES (CONTINUED)

- 2 THIS AREA PROVIDED WITH A PREVAILING TORQUE LOCKING FEATURE.
- 3 SEE CODING UNDER USAGE AND APPLICATION FOR COMPLETE PART NUMBER.
- 4 PARTS PRODUCED ON OR AFTER AUGUST 1, 1999 SHALL HAVE "C", "E", "F", "L", "M" AND "N" DIMENSIONS AND MARKING INDICATED AS "NEW". PARTS MANUFACTURED PRIOR TO AUGUST 1, 1999 WITH "OLD" DIMENSIONS AND HEAD MARKING MAY BE RECEIVED AND USED UNTIL EXISTING STOCK IS DEPLETED.
- 5 WASHER MUST BE FREE TO ROTATE.
- 6 THREAD CLASS UNJF-3B PER [AS8879](#); EXCEPT UNJC-3B FOR SIZE 5 (.1640-32) PER [AS8879](#).
- 7 ALCOA FASTENING SYSTEMS SHALL USE BOEING PART NUMBER BACC30BS.
- 8 PARTS MANUFACTURED PRIOR TO NOVEMBER 1, 2004 WITH YELLOW COLOR MAY BE PROCURED AND USED UNTIL INVENTORY IS DEPLETED.
- 9 HI-SHEAR CORP IS NOW LISI AEROSPACE - HI-SHEAR PRODUCTS. THIS CHANGE WAS A NAME CHANGE ONLY. STOCK MANUFACTURED UNDER THE "HI-SHEAR CORP" NAME MAY BE PROCURED AND USED UNTIL DEPLETED.

PROCUREMENT SPECIFICATION

[BPS-F-68](#), EXCEPT AS NOTED. FOR "K" CODED PARTS, LOCKING TORQUE, BREAKAWAY TORQUE, AND PRELOAD TESTS SHALL BE PERFORMED ON A 95 KSI MINIMUM SHEAR, 6AL-4V TITANIUM, [BMS10-85](#) TYPE I, CLASS A ALUMINUM PIGMENT COATED CETYL ALCOHOL LUBED TEST BOLT MEETING DIMENSIONAL REQUIREMENTS OF [BPS-F-68](#). COLLARS MAY BE FORGED OR MACHINED.

MATERIAL

- COLLAR - FORGED:
UNS S30430 (18-9-LW; 302 HQ) CRES PER [ASTM A 493](#).
UNS S30500 (305) CRES PER [AMS 5686](#), [QQ-S-763](#) OR [AMS-QQ-S-763](#).
MACHINED:
UNS S30323 (303 Se) CRES PER [AMS 5640](#) OR ASTM A 582.
- WASHER - UNS S30300 (303) CRES PER [AMS 5640](#) OR ASTM A 582.

FINISH

SEE [TABLE II](#).

DATE 27-MAR-1986 REV (T) 10-JUL-2014

CAGE CODE 81205

BACC30BS

SH 3

COLLAR, REDUCED HEX, PRELOAD, SHEAR,
CRES (FOR LIGHTWEIGHT HEX DRIVE
BOLTS, STANDARD OR .0156 OVERSIZE)

BACC30BS

SH 3

BOEING PART STANDARD

***** PSDS GENERATED *****

FINISH (CONTINUED)

TABLE II

LETTER CODE 3	DESCRIPTION	FINISH AND LUBRICANT	IDENTIFICATION MARKING COLOR
NO CODE	COLLAR ONLY	CADMIUM PLATE PER AMS-QQ-P-416 , TYPE II, CLASS 2. LUBRICATE WITH CETYL ALCOHOL PER AS87132 , TYPE I OR TYPE III, GRADE OPTIONAL.	VIOLET TO PURPLE
"S"	COLLAR ONLY	PASSIVATED PER AMS 2700 , TYPE 2. LUBRICATE WITH SOLID FILM LUBRICANT PER MIL-L-46010 , TYPE I (INACTIVE FOR DESIGN AND PROCUREMENT, SEE MIL-L-46010SUP) OR AS5272 , TYPE I. AS5272 SHALL BE IN ACCORDANCE WITH AS5272SUP .	ORANGE - DYKEM OR MIL-PRF-23377 8
"PW"	COLLAR AND WASHER ASSEMBLY	COLLAR PASSIVATED PER AMS 2700 , TYPE 2. LUBRICATE WITH SOLID FILM LUBRICANT PER MIL-L-46010 , TYPE I (INACTIVE FOR DESIGN AND PROCUREMENT, SEE MIL-L-46010SUP) OR AS5272 , TYPE I. AS5272 SHALL BE IN ACCORDANCE WITH AS5272SUP . WASHER PASSIVATED PER AMS 2700 , TYPE 2. NO LUBE.	
"K"	COLLAR ONLY	ALUMINUM PIGMENTED COATING PER BMS10-85 , TYPE 1, CLASS A. INSTALLATION FORCE TESTING DOES NOT APPLY. LUBRICATE WITH CETYL ALCOHOL PER AS87132 , TYPE I OR TYPE III, GRADE OPTIONAL.	NONE

LUBRICATION

SEE [TABLE II](#).

MARKING

PARTS SHALL BE MARKED WITH THE MANUFACTURER'S SYMBOL PER [MIL-HDBK-57](#), RAISED OR DEPRESSED .010 MAXIMUM, IN EITHER AREA INDICATED; OR MARK WITH .060 MINIMUM LENGTH BEAD(S), AS INDICATED IN THE GRAPHIC, NO BEAD FOR HI-SHEAR, ONE BEAD FOR ALCOA, TWO BEADS FOR SPS. SEE [TABLE III](#). BEADS MAY BE CIRCUMFERENTIAL FOR MACHINED COLLARS.

FOR ADDITIONAL MARKING REQUIREMENTS, SEE [TABLE II](#)

DATE 27-MAR-1986 REV (T) 10-JUL-2014

CAGE CODE 81205

BACC30BS

SH 4

COLLAR, REDUCED HEX, PRELOAD, SHEAR,
CRES (FOR LIGHTWEIGHT HEX DRIVE
BOLTS, STANDARD OR .0156 OVERSIZE)

BACC30BS

SH 4

BOEING PART STANDARD

***** PSDS GENERATED *****

PROCUREMENT

ALCOA FASTENING SYSTEMS - TORRANCE (CAGE CODE 5M902)

LISI AEROSPACE - HI-SHEAR PRODUCTS (CAGE CODE 73197) 

SPS TECHNOLOGIES INC, AEROSPACE PRODUCTS DIV, (CAGE CODE 56878) FOR ALL EXCEPT "K" FINISH CODES

THE MANUFACTURERS LISTED IN [BPS-F-68SUP](#) AND THEIR AUTHORIZED DISTRIBUTORS ARE THE ONLY APPROVED SOURCES FOR THE ABOVE QUALIFIED PRODUCTS. SEE [BPS-F-68SUP](#) FOR PLANT ADDRESSES. NO CHANGES IN PRODUCT DESIGN, BASIC METHODS OF MANUFACTURE, PLANT SITE OR QUALITY LEVEL SHALL BE MADE WITHOUT PRIOR NOTIFICATION AND PRIOR APPROVAL IN WRITING FROM THE BOEING COMPANY. MANUFACTURERS OF COMPETITIVE PRODUCTS MAY APPLY TO A SUPPLIER MANAGEMENT DEPARTMENT OF THE BOEING COMPANY FOR QUALIFICATION. IF A MANUFACTURER IS SHOWN ON THIS STANDARD, BUT NOT LISTED IN THE SUPPLEMENT, CONTACT THE DIVISIONAL ENGINEERING STANDARDS FOCAL POINT OR ENGINEERING STANDARDS FOR VERIFICATION.

THIS IS A MANUFACTURER-DESIGNED PRODUCT. BOEING MAKES NO REPRESENTATION WHATEVER REGARDING PATENT OR OTHER RIGHTS AFFECTING THE PRODUCT. THE LISTING OF ANY SUPPLIER DOES NOT IMPLY ANY DETERMINATION BY THE BOEING COMPANY OR BY ANY OTHER LISTED MANUFACTURER, AS TO THE RIGHTS OF SUCH MANUFACTURER.

USAGE AND APPLICATION INFORMATION

BACC30BS COLLARS ARE INTENDED FOR USE ONLY ON LIGHTWEIGHT, SHEAR TYPE, HEX-DRIVE BOLTS, SUCH AS [BACB30VU](#), [BACB30VT](#), [BACB30WM](#) AND [BACB30YP](#).

BACC30BS COLLARS HAVE AN ENLARGED COUNTERBORE DIAMETER FOR USE WITH NOMINAL DIAMETER OR .0156 OVERSIZE BOLTS.

INSTALL PER [BAC5004-2](#) OR [BAC5063](#), AS APPLICABLE.

CODING

DASH NUMBER DESIGNATES NOMINAL THREAD SIZE IN .03125 INCREMENTS PER [TABLE I](#).

LETTER CODE FOLLOWING DASH NUMBER DESIGNATES FINISH, LUBRICATION AND COLOR. SEE [TABLE II](#).

DATE 27-MAR-1986 REV (T) 10-JUL-2014

CAGE CODE 81205

BACC30BS**SH 5**

**COLLAR, REDUCED HEX, PRELOAD, SHEAR,
CRES (FOR LIGHTWEIGHT HEX DRIVE
BOLTS, STANDARD OR .0156 OVERSIZE)**

BACC30BS**SH 5****BOEING PART STANDARD**

EXAMPLE OF PART NUMBER

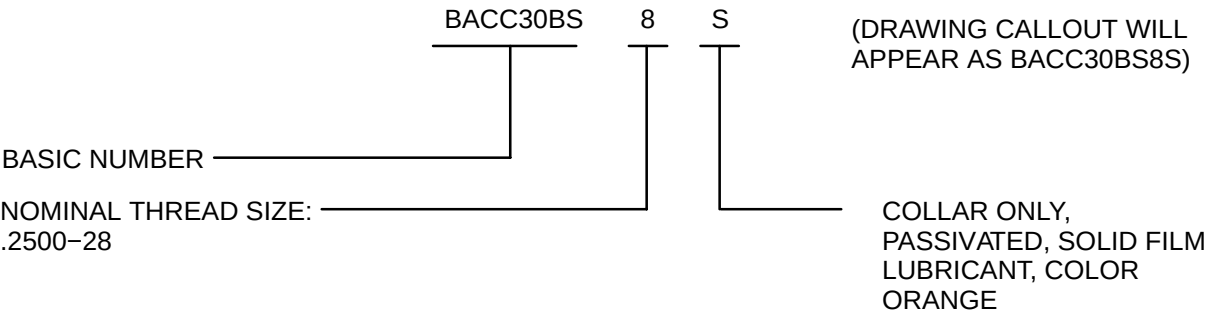


TABLE III

MANUFACTURER	MANUFACTURER'S BASIC NUMBER ⁴		IDENTIFICATION MARKING
	OLD	NEW	
LISI AEROSPACE - HI-SHEAR PRODUCTS	HST1094	HST994	NONE
ALCOA	- - -	7	ONE BEAD
SPS	HST1094	HST994	TWO BEADS

THE MANUFACTURER'S BASIC NUMBERS LISTED ARE FOR INTERCHANGEABILITY PURPOSES ONLY AND ARE NOT TO BE USED FOR DRAWING CALLOUT, PROCUREMENT OR RECEIVING INSPECTION PURPOSES, EXCEPT FOR MARKING.

SEE [BACD2074](#) FOR FASTENER CODES.

SEE [D-590-PREFACE](#) FOR INACTIVATION DEFINITIONS. SEE [00000-D-590-INFO](#) FOR LINKS TO SUPERSESSION CLASS DEFINITIONS AND FAQ.

DATE 27-MAR-1986 REV (T) 10-JUL-2014

CAGE CODE 81205

BACC30BS

SH 6

COLLAR, REDUCED HEX, PRELOAD, SHEAR,
CRES (FOR LIGHTWEIGHT HEX DRIVE
BOLTS, STANDARD OR .0156 OVERSIZE)

BACC30BS

SH 6