

Cover Page

Standard: BACR15BB Rev: (BB) 02-Jul-2009

WARNING - The Export Control or Intellectual Property language on this page takes precedence over any such language that may appear on subsequent pages of this document.

No license is required for the dissemination of the commercial information contained herein to foreign persons other than those from or in the terrorist supporting countries identified in the United States Export Administration Regulations (EAR) (15 CFR 730-774). It is the responsibility of the individual in control of this data to abide by U.S. export laws.

ECCN EAR99


Boeing Proprietary, Distribution limited to Boeing employees and others covered by applicable proprietary information or nondisclosure agreements.

Copyright © 1989, 1991, 1993, 1995-1996, 1999, 2002-2004, 2008-2009 Boeing. All rights reserved.

Any reproduction of this document or portions thereof must also reproduce this page of the document.

***** PSDS GENERATED *****

FOR STATUS OF INACTIVATION SEE APPLICABILITY BLOCK	BCA	P	IDS	P										
	NEW DESIGN APPROVAL: P=PARTIAL, F=FULL, N=NONE													

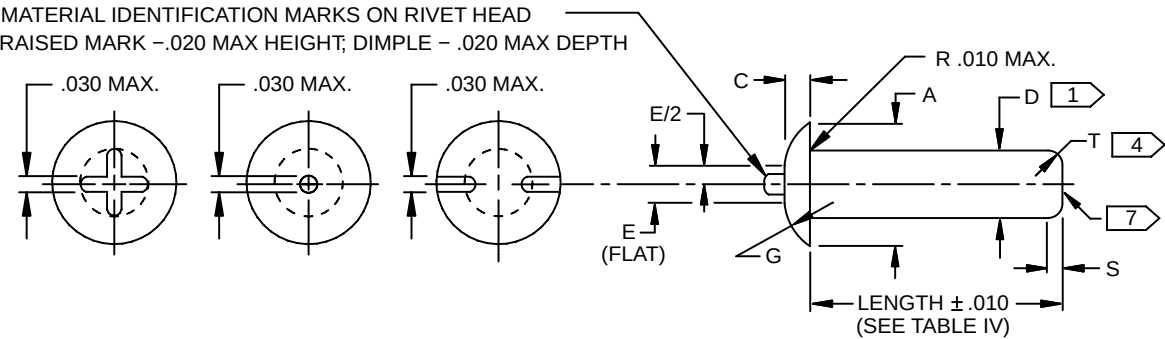

DIMENSIONING AND TOLERANCING PER [ASME Y14.5M-1994](#),
EXCEPT RADII ARE CONTROLLED RADII UNLESS OTHERWISE NOTED.
DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED.
DIMENSIONS APPLY AFTER FINISH UNLESS OTHERWISE SPECIFIED.

TABLE I MATERIAL CODING AND MARKING 11

PART NUMBER CODE LETTERS	A	B	D	AD	DD
MATERIAL NOMENCLATURE	1100-F	5056-H32	2017-T4	2117-T4	2024-T4 11
HEAD MARKING	NONE	RAISED CROSS	RAISED DOT	DIMPLE	RAISED DOUBLE DASH

TABLE II DIMENSIONS

BOEING STANDARD NUMBER BACR15BB 11	NOM Ø REF	ØA		C +.010 -.000	Ø D +.0025 -.0000 11	Ø E ±.010	G RADIUS		GLMC RAD 11	GMMC RAD 11	S +.000 -.010	T RAD ±.010
		MIN	MAX				MIN	MAX				
2	.062	.121	.131	.027	.0625	.031	.0401	.0695	.0598	.0459	.016	.019
3	.094	.186	.196	.040	.0938	.046	.0673	.1000	.0903	.0740	.023	.029
4	.125	.252	.262	.054	.1250	.062	.0953	.1291	.1196	.1025	.031	.039
5	.156	.316	.328	.067	.1560	.078	.1229	.1596	.1482	.1320	.039	.049
6	.188	.380	.394	.080	.1870	.093	.1516	.1911	.1778	.1626	.047	.059
8	.250	.509	.525	.107	.2500	.125	.2079	.2499	.2349	.2210	.062	.078
10	.312	.638	.656	.133	.3120	.156	.2662	.3110	.2940	.2814	.078	.098
12	.375	.767	.787	.161	.3750	.187	.3230	.3694	.3508	.3400	.094	.117
14	.438	.888	.918	.189	.4375	.218	.3731	.4279	.4003	.3986	.110	.137

TECHNICAL CHANGES IDENTIFIED BY REVISION BAR.

DATE 09-MAR-1963 REV (BB) 02-JUL-2009 CAGE CODE 81205

BACR15BB
SH 1 OF 11

RIVET,
UNIVERSAL HEAD, CLOSE
TOLERANCE SHANK

BACR15BB
SH 1 OF 11

***** PSDS GENERATED *****

See Cover Page

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK

TABLE III DIMENSIONS, OVERSIZE 6

BOEING STANDARD NUMBER BACR15BB 11	NOM Ø REF	Ø A		C +.010 -.000	Ø D +.0025 -.0000 1	Ø E ±.010	G RADIUS		GLMC RAD 8	GMMC RAD 8	S +.000 -.010	T RAD ±.010
		MIN	MAX				MIN	MAX				
7	.219	.380	.394	.080	.2170	.093	.1516	.1911	.1778	.1626	.055	.069
9	.281	.509	.525	.107	.2795	.125	.2079	.2499	.2349	.2210	.070	.088
11	.344	.638	.656	.133	.3420	.156	.2662	.3110	.2940	.2814	.086	.108
13	.406	.767	.787	.161	.4045	.187	.3230	.3694	.3508	.3400	.102	.127
15	.468	.888	.918	.189	.4675	.218	.3731	.4279	.4003	.3986	.118	.147

TABLE IV STANDARD LENGTHS AND DASH NUMBERS 3 4 6

BOEING STANDARD NUMBER BACR15BB 11	NOM Ø REF	NOMINAL RIVET LENGTH												
		.125	.188	.250	.312	.375	.438	.500	.562	.625	.750	.875	1.000	1.125
		DASH NUMBERS												
2	.062	2	3	4	5	6	7	8	9	10	12	14	16	18
3	.094	2	3	4	5	6	7	8	9	10	12	14	16	18
4	.125	---	3	4	5	6	7	8	9	10	12	14	16	18
5	.156	---	3	4	5	6	7	8	9	10	12	14	16	18
6	.188	---	---	4	5	6	7	8	9	10	12	14	16	18
7 6	.219	---	---	4	5	6	7	8	9	10	12	14	16	18
8	.250	---	---	---	5	6	7	8	9	10	12	14	16	18
9 6	.281	---	---	---	---	6	7	8	9	10	12	14	16	18
10	.312	---	---	---	---	6	7	8	9	10	12	14	16	18
11 6	.344	---	---	---	---	---	---	8	9	10	12	14	16	18
12	.375	---	---	---	---	---	7	8	9	10	12	14	16	18
13 6	.406	---	---	---	---	---	---	---	---	10	12	14	16	18
14	.438	---	---	---	---	---	---	8	9	10	12	14	16	18
15 6	.468	---	---	---	---	---	---	---	---	---	---	14	16	18

DATE 09-MAR-1963 REV (BB) 02-JUL-2009

CAGE CODE 81205

BACR15BB

SH 2

RIVET,
UNIVERSAL HEAD, CLOSE
TOLERANCE SHANK

BACR15BB

SH 2

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK

TABLE IV STANDARD LENGTHS AND DASH NUMBERS 3 4 6
(CONTINUED)

BOEING STANDARD NUMBER BACR15BB 11	NOM Ø REF	NOMINAL RIVET LENGTH								
		1.250	1.375	1.500	1.750	2.000	2.500	3.000	3.500	4.000
		DASH NUMBERS								
2	.062	20	---	---	---	---	---	---	---	---
3	.094	20	22	---	---	---	---	---	---	---
4	.125	20	22	24	---	---	---	---	---	---
5	.156	20	22	24	28	32	---	---	---	---
6	.188	20	22	24	28	32	40	48	---	---
7 6	.219	---	---	---	---	---	---	---	---	---
8	.250	20	22	24	28	32	40	48	56	---
9 6	.281	---	---	---	---	---	---	---	---	---
10	.312	20	22	24	28	32	40	48	56	64
11 6	.344	20	22	---	---	---	---	---	---	---
12	.375	20	22	24	28	32	40	48	56	64
13 6	.406	20	22	24	28	---	---	---	---	---
14	.438	20	22	24	28	32	40	48	56	64
15 6	.468	20	22	24	28	32	---	---	---	---

NOTES

- 1 SHANK DIAMETER TOLERANCE + .0035, -.0000 WITHIN .10 OF BASE OF HEAD. FOR LENGTHS OF EIGHT DIAMETERS OR MORE, THE MINIMUM SHANK DIAMETER MAY BE .0005 LESS THAN THE TABULATED VALUES.
- 2 WITH THE EXCEPTION OF ALLOY 2024-T4, PREVIOUS REVISIONS OF THIS STANDARD PERMITTED EITHER ANODIZE OR CONVERSION COAT FINISH UNLESS CODE "C" WAS SPECIFIED. CODE "C" RESTRICTED THE FINISH TO CONVERSION COAT ONLY. FINISH IS NOW LIMITED TO CONVERSION COAT (CODE "C"), EXCEPT FINISH FOR ALLOY 2024-T4 IS ANODIZE (NO CODE). SEE PART MARKING AND CODING SECTIONS.
- 3 LENGTHS NOT LISTED IN [TABLE IV](#) MAY BE ORDERED IN .0625 INCREMENTS BY USE OF APPROPRIATE DASH NUMBERS. ADD SUFFIX "R5" TO THE SECOND DASH NUMBER FOR RIVETS .03125 LONGER THAN ALLOWED BY THE BASIC DASH NUMBERS.
- 4 RIVETS ABOVE SOLID LINE IN [TABLE IV](#) MAY BE FURNISHED WITH SQUARE OR RADIUSSED ENDS. RIVETS BELOW SOLID LINE, INCLUDING DASH NUMBERS 2, 3, 4, 5, 6, SHALL HAVE RADIUSSED ENDS EXCEPT THE SIZE 14 RIVET (.438 DIAMETER) AND SIZE 15 RIVET (.468 DIAMETER) MAY HAVE SQUARE OR "T" RADIUS ENDS.

DATE 09-MAR-1963 REV (BB) 02-JUL-2009

CAGE CODE 81205

BACR15BB

SH 3

RIVET,
UNIVERSAL HEAD, CLOSE
TOLERANCE SHANK

BACR15BB

SH 3

***** PSDS GENERATED *****

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK

NOTES (CONTINUED)

- 5 2024-T4 RIVETS (MATERIAL CODE "DD") REQUIRE RE-SOLUTION HEAT TREATMENT AND COLD (ICE BOX) STORAGE PRIOR TO INSTALLATION AND CANNOT BE USED IN KITS WHERE THEY ARE SHIPPED AS LOOSE PARTS.
- 6 -7, -9, -11, -13 AND -15 RIVET OVERSIZES LISTED IN [TABLE III](#) AND [TABLE IV](#) ARE INTENDED FOR REPAIR USE ONLY.
- 7 SEE PART MARKING SECTION.
- 8 SEE [FIGURE 1](#), TOLERANCE ZONE LAYOUT OF RIVET HEAD. G_{lmc} AND G_{mmc} ARE USED ONLY FOR OVERLAY LAYOUT.
- 9 FOR ALL MATERIALS EXCEPT 2024, "NO CODE" AND "C" CODE CALLOUTS WILL BE CHEMICAL CONVERSION COATED. PARTS WITH A "C" MARKING ARE ACCEPTABLE FOR "NO CODE" CALLOUTS.
- 10 BRILES RIVET CORPORATION IS NO LONGER IN BUSINESS. RIVETS MANUFACTURED BY THE BRILES RIVET CORPORATION PRIOR TO OCTOBER 1, 1999 MAY BE RECEIVED UNTIL OCTOBER 1, 2004 PROVIDED THE ORIGINAL BRILES RIVET CORPORATION DATA CERTIFICATIONS ACCOMPANY ALL SHIPMENTS WITH A BRILES RIVET (ALLFAST FASTENING SYSTEMS INC.) CERTIFICATION OF COMPLIANCE.
- 11 SEE CODING UNDER USAGE AND APPLICATION FOR COMPLETE BOEING PART NUMBER
- 12 AEROSPACE RIVET MANUFACTURERS CORPORATION IS NO LONGER IN BUSINESS. RIVETS MANUFACTURED BY THE AEROSPACE RIVET MANUFACTURERS CORPORATION PRIOR TO MAY 1, 2002 MAY BE RECEIVED UNTIL DEPLETED PROVIDED THE ORIGINAL AEROSPACE RIVET MANUFACTURERS CORPORATION DATA CERTIFICATIONS ACCOMPANY ALL SHIPMENTS WITH AN AEROSPACE RIVET MANUFACTURERS CORPORATION (ALLFAST FASTENING SYSTEMS INC.) CERTIFICATE OF COMPLIANCE.
- 13 PARTS MANUFACTURED AFTER AUGUST 31, 2004 SHALL HAVE THE ORANGE DYED CONVERSION COAT FINISH. PARTS FINISHED ONLY WITH CHEMICAL CONVERSION COAT PER [MIL-C-5541](#), CLASS 1A, CLEAR, COLORLESS MAY BE PROCURED AND USED UNTIL STOCKS ARE DEPLETED.

PROCUREMENT SPECIFICATION

[BPS-R-131](#), EXCEPT AS NOTED.

MATERIAL

PER [TABLE I](#) AND [QQ-A-430](#) EXCEPT H15 TEMPER WIRE OR ROD MAY BE USED AS RAW MATERIAL FOR 2017-T4 RIVETS.

DATE 09-MAR-1963 REV (BB) 02-JUL-2009

CAGE CODE 81205

BACR15BB**SH 4**

**RIVET,
UNIVERSAL HEAD, CLOSE
TOLERANCE SHANK**

BACR15BB**SH 4**

***** PSDS GENERATED *****

See Cover Page

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK

HEAT TREATMENT

PER [BPS-R-131](#).

FINISH

1100-F, 5056-H32, AND 2017-T4 SHALL BE CHEMICAL CONVERSION COATED PER [MIL-C-5541](#), CLASS 1A, CLEAR, COLORLESS. [2](#) [9](#)

2117-T4 SHALL BE CHEMICAL CONVERSION COATED PER [MIL-C-5541](#), CLASS 1A, CLEAR, COLORLESS. [2](#) [9](#) [13](#)

2117-T4 SHALL BE ORANGE DYE (U.S. SPECIALTY COLOR CORPORATION SPECIALTY ORANGE NO. 7) APPLIED OVER CHEMICAL CONVERSION COAT PER [MIL-C-5541](#), CLASS 1A, GOLD, YELLOW. [13](#) SEE COLOR SECTION.

2024-T4 ALUMINUM ALLOY: ANODIZE PER [MIL-A-8625](#), CLASS 1.

RIVETS SHALL BE CAPABLE OF PASSING SALT SPRAY TESTS PER [MIL-STD-1312-1](#) IN ACCORDANCE WITH [NASM1312-1](#); TEST DURATION 48 HOURS MINIMUM FOR CONVERSION COATED RIVETS AND 96 HOURS MINIMUM FOR ANODIZED RIVETS. AT THE CONCLUSION OF THE SALT SPRAY TEST, THERE SHALL BE NO VISIBLE CORROSION WHEN EXAMINED AT 10X MAGNIFICATION.

LOT SAMPLING SHALL BE IN ACCORDANCE WITH ANSI/ASQC [Z1.4](#), INSPECTION LEVEL S-3, AQL EQUIVALENT OF 6.5 PERCENT DEFECTIVE. LOT SIZE SHALL BE DEFINED IN TERMS OF POUNDS AND SAMPLING SHALL BE DEFINED IN TERMS OF NUMBERS OF RIVETS.

MARKING

MATERIAL IDENTIFICATION ON HEAD, AS DEFINED IN THE GRAPHIC AND [TABLE I](#).

MANUFACTURER'S SYMBOL/INSIGNIA ON HEAD, RAISED OR DEPRESSED .010 MAXIMUM, IS REQUIRED FOR SIZE 4 (.125 DIAMETER) AND LARGER RIVETS MANUFACTURED AFTER MARCH 1, 1992. MANUFACTURER'S SYMBOL/INSIGNIA IS OPTIONAL ON SMALL RIVETS AND RIVETS MANUFACTURED PRIOR TO MARCH 1, 1992.

OVERSIZE IDENTIFICATION ON HEAD:

FOR 1100-F, 2017-T4, AND 2117-T4 ALLOYS:
INDENTED "O", .060 MINIMUM OUTER DIAMETER, .090 MAXIMUM OUTER DIAMETER BY .010 MAXIMUM DEPTH TO INDICATE OVERSIZE.

FOR 5056-H32, AND 2024-T4 ALLOYS:
INDENTED "O", OPTIONAL OUTER DIAMETER BY .010 MAXIMUM DEPTH TO INDICATE OVERSIZE.

IDENTIFICATION OF CONVERSION COATED RIVETS (NOT REQUIRED FOR 2024).

DATE 09-MAR-1963 REV (BB) 02-JUL-2009

CAGE CODE 81205

BACR15BB**SH 5**

**RIVET,
UNIVERSAL HEAD, CLOSE
TOLERANCE SHANK**

BACR15BB**SH 5**

***** PSDS GENERATED *****

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK

MARKING (CONTINUED)

ALL CONVERSION COATED RIVETS (INCLUDING ORANGE DYED CONVERSION COATED 2117-T4 RIVETS) MANUFACTURED AFTER SEPTEMBER 1, 1993 SHALL HAVE THE LETTER "C " ON THE TERMINAL (SHANK) END, RAISED OR DEPRESSED .020 MAXIMUM, SIZE OPTIONAL. "C" MARKING IS OPTIONAL ON RIVETS MANUFACTURED PRIOR TO THAT DATE.

CONVERSION COATED RIVETS WITHOUT THE LETTER "C" MARKING MAY BE RECEIVED BY BOEING AND BOEING SUBCONTRACTORS UNTIL MARCH 1, 1997 PROVIDED THAT THE RIVETS WERE MANUFACTURED PRIOR TO SEPTEMBER 1, 1993. EXISTING STOCKS OF RIVETS WITHOUT "C" MARKING MAY BE USED UNTIL DEPLETED.

PACKAGING

THE PACKAGING REQUIREMENTS HEREIN ARE APPLICABLE TO ALL RIVETS EXCEPT ALLOY 2024 AND ARE MANDATORY AFTER AUGUST 1, 1995.

NOTE: PACKAGING REQUIREMENTS ARE NOT APPLICABLE TO 2024 RIVETS AS THESE RIVETS ARE RESOLUTION HEAT TREATED PRIOR TO USE.

RIVETS OF THE SAME LOT, STYLE, SIZE AND PART NUMBER SHALL BE PACKED IN ONE POUND SEALED PLASTIC BAGS. THE ONE POUND BAGS SHALL BE PACKED IN INTERMEDIATE OR UNIT CONTAINERS (RIVET BOXES) OF 10 POUNDS MAXIMUM NET WEIGHT. FINAL PACKAGING SHALL BE IN ACCORDANCE WITH [BPS-R-131](#).

THE FOLLOWING INFORMATION SHALL BE MARKED ON THE OUTSIDE OF EACH ONE POUND PLASTIC BAG AND EACH INTERMEDIATE OR UNIT CONTAINER:

- a. DATE OF MANUFACTURE OR DATE OF HEAT TREATMENT.
- b. MANUFACTURER'S LOT NUMBER.
- c. BOEING PART NUMBER.
- d. MANUFACTURER'S NAME.
- e. BAR CODE WHEN AND AS SPECIFIED ON PURCHASE ORDER.

DATE 09-MAR-1963 REV (BB) 02-JUL-2009

CAGE CODE 81205

BACR15BB**SH 6**

**RIVET,
UNIVERSAL HEAD, CLOSE
TOLERANCE SHANK**

BACR15BB**SH 6**

***** PSDS GENERATED *****

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK

TOLERANCE ZONE LAYOUT OF RIVET HEAD (SEE Figure 1)

HORIZONTAL LINE AB REPRESENTING THE BASE OF THE RIVET HEAD, AND VERTICAL LINE CD REPRESENTING THE RIVET AXIS. TWO LINES PARALLEL TO LINE AB, ONE AT C_{min} OF LENGTH $E_{min}/2$ AND ONE AT C_{max} OF LENGTH $E_{max}/2$. TWO RADII, G_{lmc} (LEAST MATERIAL CONDITION) AND G_{mmc} (MAXIMUM MATERIAL CONDITION), CENTERED ON LINES THAT ARE PARALLEL TO LINE CD, ONE LINE THROUGH $E_{min}/2$ AND ONE LINE THROUGH $E_{max}/2$, RESPECTIVELY. THE SAME TWO RADII, G_{lmc} AND G_{mmc} , INTERSECTING LINE AB, ONE AT $A_{min}/2$ AND ONE AT $A_{max}/2$ RESPECTIVELY. TWO LINES PARALLEL TO LINE CD AND INTERSECTING LINE AB AT $D_{min}/2$ AND $D_{max}/2$. TOLERANCE ZONE IS SYMMETRICAL ABOUT THE LINE CD.

THE LOCATION OF THE ACTUAL RADIUS OF THE COMPLETED RIVET WITH RESPECT TO THE SHANK SHALL BE WITHIN THE BOUNDARY DEFINED BY LMC AND MMC, AS SHOWN.

NOTE:

THE TOLERANCE ZONE LAYOUT IN [FIGURE 1](#) IS NOT TO SCALE AND IS INTENDED FOR REFERENCE PURPOSES ONLY.

DATE 09-MAR-1963 REV (BB) 02-JUL-2009

CAGE CODE 81205

BACR15BB**SH 7**

**RIVET,
UNIVERSAL HEAD, CLOSE
TOLERANCE SHANK**

BACR15BB**SH 7**

***** PSDS GENERATED *****

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK

TOLERANCE ZONE LAYOUT OF RIVET HEAD (SEE Figure 1) (CONTINUED)

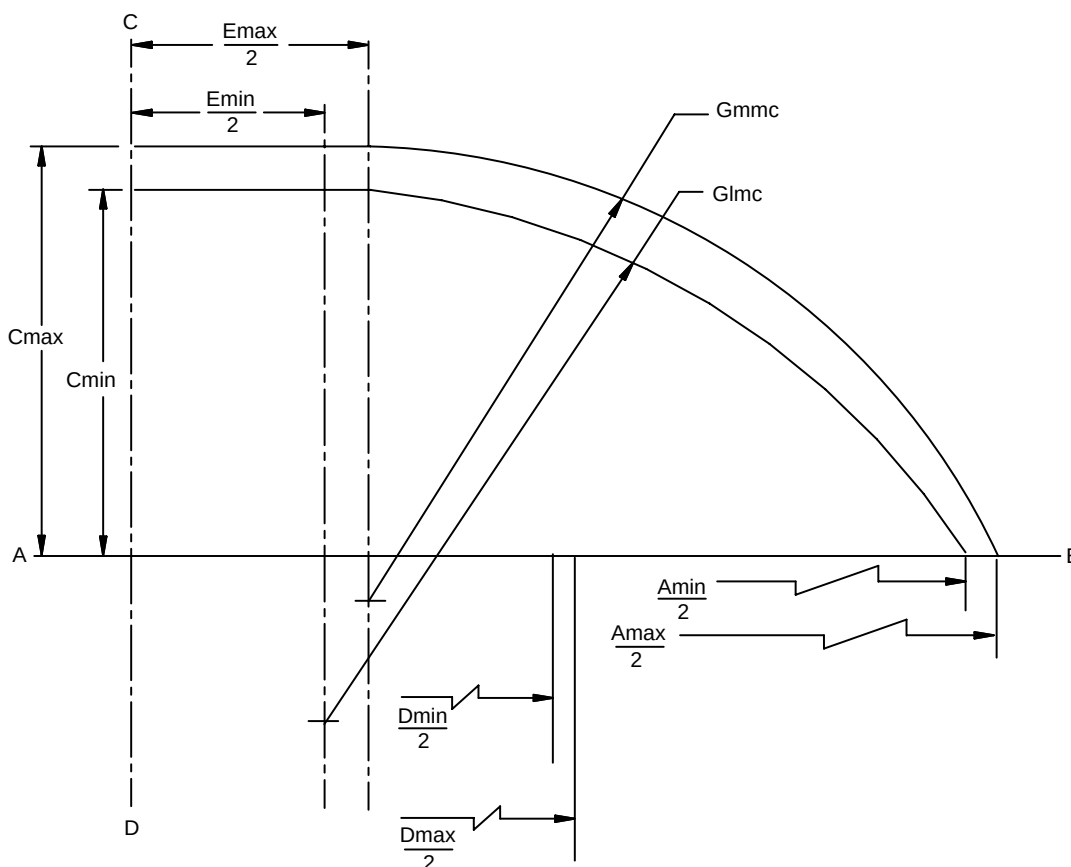


FIGURE 1 - PROFILE OF RIVET HEAD RADIUS "G" (NOT TO SCALE)

COLOR

1100-F, 2017-T4 AND 5056-H32 ("C" FINISH CODE): CLEAR, COLORLESS.

2117-T4 ("C" FINISH CODE): CLEAR, COLORLESS. [13](#)

2117-T4 ("C" FINISH CODE): ORANGE NO. 12300 OR ORANGE NO. 22544 PER [FED-STD-595](#). [13](#) ISOLATED AREAS DEVOID OF ORANGE DYE ARE ACCEPTABLE PROVIDED THE NON-COVERED AREAS DO NOT EXCEED 20 PERCENT OF THE TOTAL RIVET SURFACE AREA.

2024-T4 (NO CODE): NATURAL, COLORLESS.

DATE 09-MAR-1963 REV (BB) 02-JUL-2009

CAGE CODE 81205

BACR15BB

SH 8

RIVET,
UNIVERSAL HEAD, CLOSE
TOLERANCE SHANK

BACR15BB

SH 8

***** PSDS GENERATED *****

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK

PROCUREMENT

AEROSPACE RIVET MANUFACTURERS CORP (CAGE CODE 64728) [12](#)

ALLFAST FASTENING SYSTEMS INC (CAGE CODE 53551)

ATELIER'S DE LA HAUTE-GARONNE (AHG) (CAGE CODE F0095)

BRILES RIVET CORP (CAGE CODE 55580) [10](#)

THE MANUFACTURERS LISTED IN [BPS-R-131SUP](#) AND THEIR AUTHORIZED DISTRIBUTORS ARE THE ONLY APPROVED SOURCES FOR THE ABOVE QUALIFIED PRODUCTS. SEE [BPS-R-131SUP](#) FOR PLANT ADDRESSES. NO CHANGES IN PRODUCT DESIGN, BASIC METHODS OF MANUFACTURE, PLANT SITE OR QUALITY LEVEL SHALL BE MADE WITHOUT PRIOR NOTIFICATION AND PRIOR APPROVAL IN WRITING FROM THE BOEING COMPANY. MANUFACTURERS OF COMPETITIVE PRODUCTS MAY APPLY TO A SUPPLIER MANAGEMENT AND PROCUREMENT DEPARTMENT OF THE BOEING COMPANY FOR QUALIFICATION. IF A MANUFACTURER IS SHOWN ON THIS STANDARD, BUT NOT LISTED IN THE SUPPLEMENT, CONTACT THE DIVISIONAL ENGINEERING STANDARDS FOCAL POINT OR ENGINEERING STANDARDS FOR VERIFICATION.

ALLFAST FASTENING SYSTEMS INC, HAS NOTIFIED BOEING OF ALLFAST U.S.PATENT 7,413,777 ENTITLED "COATING COMPOSITION AND METHODS OF COATING".

USAGE AND APPLICATION INFORMATION

BACR15BB RIVETS ARE THE SAME AS [MS20470](#) RIVETS EXCEPT FOR CLOSER SHANK TOLERANCE AND CONTROLLED SHANK EXPANSION ADJACENT TO THE HEAD.

INSTALL PER [BAC5004-1](#), [BAC5047-1](#), [BAC5047-2](#) OR [BAC5063](#), AS APPLICABLE.

CODING

FIRST DASH NUMBER INDICATES NOMINAL DIAMETER IN .03125 INCREMENTS.

CODE LETTERS BETWEEN DASH NUMBERS INDICATE MATERIAL AND TEMPER (SEE [TABLE I](#)).

SECOND DASH NUMBER INDICATES NOMINAL LENGTH IN .0625 INCREMENTS.

SUFFIX "R5" TO THE SECOND DASH NUMBER INDICATES INTERMEDIATE (.03125 LONGER) LENGTH.

FINISH CODES ARE THE SUFFIX TO THE PART NUMBER AS FOLLOWS:

CODE "C" AT THE END OF THE PART NUMBER INDICATES CHEMICAL CONVERSION COATING. CODE "C" SHALL BE USED FOR 1100-F, 2017-T4, 2117-T4 AND 5056-H32.

DATE 09-MAR-1963 REV (BB) 02-JUL-2009

CAGE CODE 81205

BACR15BB**SH 9**

**RIVET,
UNIVERSAL HEAD, CLOSE
TOLERANCE SHANK**


BACR15BB**SH 9**

***** PSDS GENERATED *****

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK

CODING (CONTINUED)

FOR ALL MATERIALS EXCEPT 2024, NO CODE AT THE END OF THE PART NUMBER INDICATES CHEMICAL CONVERSION COAT. "NO CODE", USED WITH MATERIAL CODE "DD" (ALLOY 2024), SPECIFIES ANODIZE.  

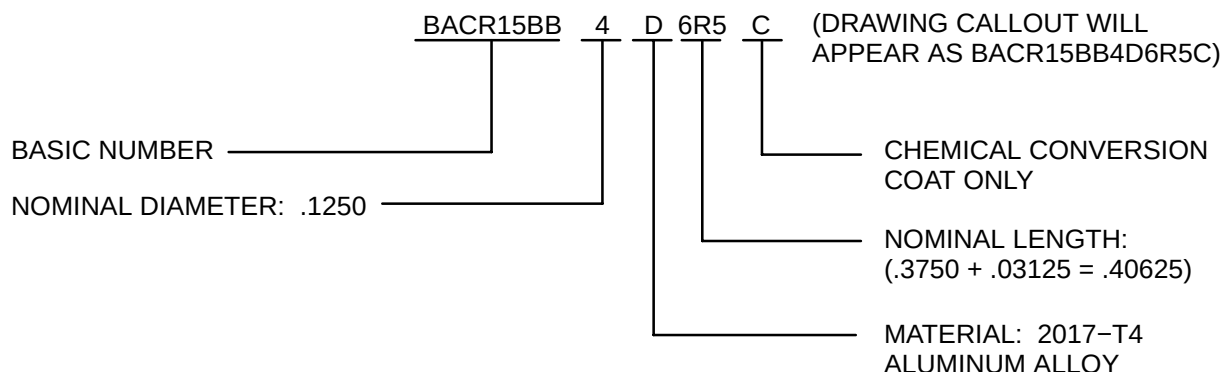EXAMPLE OF PART NUMBER**FASTENER CODE**

SEE [BACD2074](#) FOR FASTENER CODES.

TABLE V BCA & BH SUPERSESSION INFORMATION

OBSOLETE PART NUMBERS	SUPERSEDING PART NUMBERS	SUPERSESSION CLASS
BACR15BB()AD()	BACR15BB()AD()C	II
BACR15BB()A()	BACR15BB()A()C	II
BACR15BB()B()	BACR15BB()B()C	II
BACR15BB()D()	BACR15BB()D()C	II

DATE 09-MAR-1963 REV (BB) 02-JUL-2009

CAGE CODE 81205

BACR15BB
SH 10

**RIVET,
UNIVERSAL HEAD, CLOSE
TOLERANCE SHANK**

BACR15BB
SH 10

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK

SEE [D-590-PREFACE](#) (INDEX) FOR INACTIVATION DEFINITIONS. SEE [D-590-SUPERSESSION-LIST](#) FOR SUPERSESSION CLASS DEFINITIONS AND SUPERSESSION LIST.

INACTIVATION APPLICABILITY

- BCA, IDS
(EXCEPTIONS: BH)

- BACR15BB()J() RIVETS (7075–T73) ARE INACTIVE FOR DESIGN AND PROCUREMENT.
BACR15BB()DD() RIVETS (2024–T4) ARE CLASS II SUPERSESSIONS.
- BCA, BH

- BACR15BB RIVETS WITH OPTIONAL FINISH  ARE INACTIVE FOR DESIGN AND PROCUREMENT. SEE [TABLE V](#). SEE PART MARKING SECTION FOR EFFECTIVITY OF THE “C” MARKING REQUIREMENT FOR CONVERSION COATED RIVETS.

DATE 09-MAR-1963 REV (BB) 02-JUL-2009

CAGE CODE 81205

BACR15BB

SH 11

RIVET,
UNIVERSAL HEAD, CLOSE
TOLERANCE SHANK

BACR15BB

SH 11