

Cover Page

Standard: BACR15DS Rev: (W) 08-Aug-2006

WARNING - The Export Control or Intellectual Property language on this page takes precedence over any such language that may appear on subsequent pages of this document.

No license is required for the dissemination of the commercial information contained herein to foreign persons other than those from or in the terrorist supporting countries identified in the United States Export Administration Regulations (EAR) (15 CFR 730-774). It is the responsibility of the individual in control of this data to abide by U.S. export laws.

ECCN EAR99


Boeing Proprietary, Distribution limited to Boeing employees and others covered by applicable proprietary information or nondisclosure agreements.

Copyright © 1989, 1995, 2006 Boeing. All rights reserved.

Any reproduction of this document or portions thereof must also reproduce this page of the document.

***** PSDS GENERATED *****
BOOK 23. DO NOT USE FOR NEW DESIGN.

RESTRICTED USAGE: REPAIR ONLY

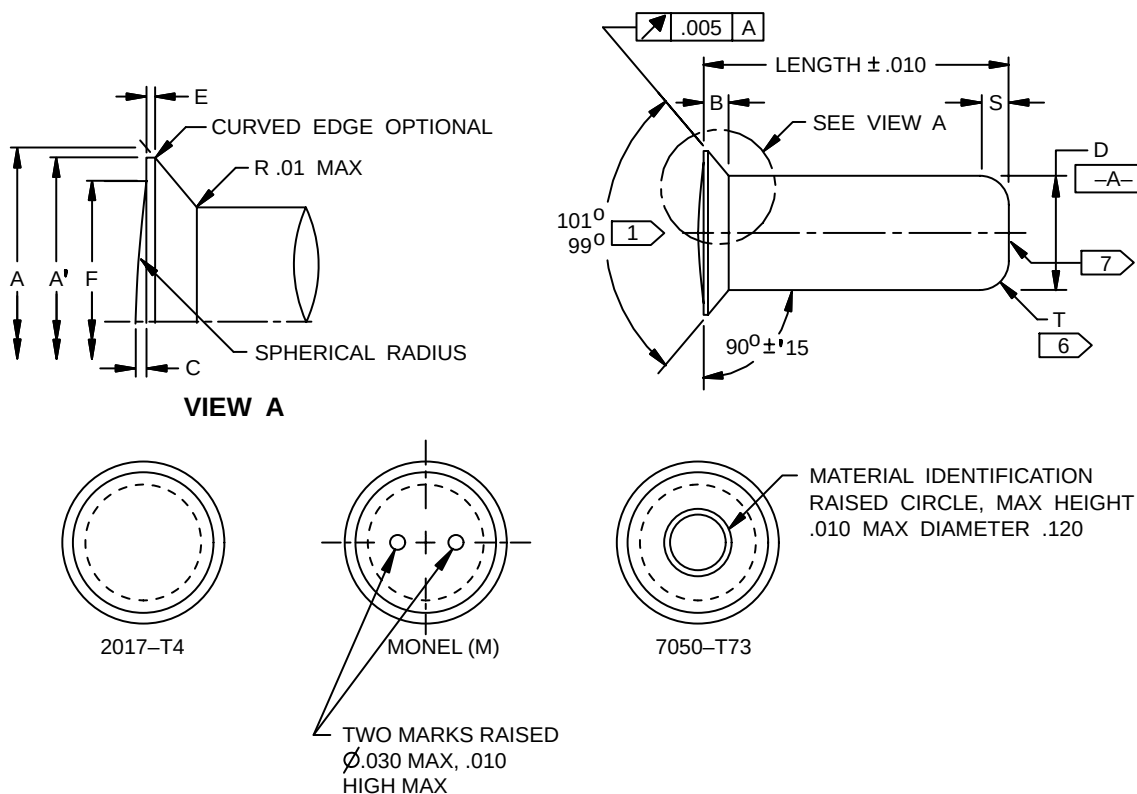

DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.
 DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED.

TABLE I MATERIAL CODING AND MARKING

MATERIAL CODE LETTER		D	KE	M
MATERIAL NOMENCLATURE	AS INSTALLED (DRAWING CALL-OUT)	2017-T3	7050-T73	Ni-Cu (MONEL)
	AS PURCHASED	2017-T4	7050-T73	Ni-Cu (MONEL)
MATERIAL IDENTIFICATION (HEAD MARKING)		NONE	RAISED CIRCLE	TWO RAISED MARKS

TECHNICAL CHANGES IDENTIFIED BY REVISION BAR.

DATE 17-MAR-1964 REV (W) 08-AUG-2006

CAGE CODE 81205

BACR15DS
SH 1 OF 6

**RIVET,
 100 DEG SHEAR HEAD,
 (.0312 OVERSIZE SHANK)**

BACR15DS
SH 1 OF 6

**BOEING PART STANDARD
 BOOK 23. DO NOT USE FOR NEW DESIGN.**

***** PSDS GENERATED *****
BOOK 23. DO NOT USE FOR NEW DESIGN.

RESTRICTED USAGE: REPAIR ONLY

TABLE II DIMENSIONS

BOEING STANDARD NUMBER BACR15DS ⑩	NOM SIZE REF	Ø A TO SHARP CORNER ①		Ø A' MIN	B HEAD HEIGHT MAX REF	C +.002 -.000 ③	Ø D +.002 -.000 ②	E MAX LAND WIDTH	Ø F ± .005 ②	S MAX ⑥	T RAD ± .010 ⑥
		MAX	MIN								
7	.2188	.324	.319	.298	.046	.004	.220	.006	.242	.047	.059
9	.2812	.424	.419	.396	.061	.004	.283	.006	.342	.062	.078

TABLE III DASH NUMBERS FOR STANDARD LENGTHS ⑤

DIAMETER	NOMINAL LENGTH AND DASH NUMBERS							
	.2500	.3125	.3750	.4375	.5000	.5625	.6250	.7500
.2188	4	5	6	7	8	9	10	12
.2812		5	6	7	8	9	10	12
	.8750	1.0000	1.1250	1.2500	1.3750	1.5000	1.7500	2.0000
.2188	14	16	18	20	22	24	28	---
.2812	14	16	18	20	22	24	28	32

NOTES

- ① "A" DIAMETER TO SHARP CORNER AND HEAD ANGLE ARE SUBJECT TO BOEING INSPECTION BY COMPARATOR METHOD.
- ② .001 INCREASE IN SHANK DIAMETER TOLERANCE IS PERMISSIBLE WITHIN .100 OF BASE OF HEAD.
- ③ "C" DIMENSION IS THE HEIGHT OF THE CURVED SURFACE ON THE RIVET HEAD. THE CURVE MUST JOIN THE RIVET HEAD FLAT SURFACE, WITHOUT ABRUPT SHOULDER, AT DIMENSION "F".
- ④ RIVETS MANUFACTURED BY ALCOA, WHICH WERE RECEIVED PRIOR TO 1 JUL 92, MAY BE USED UNTIL STOCKS ARE EXHAUSTED.
- ⑤ LONGER NONSTANDARD LENGTHS IN INCREMENTS OF .0625 MAY BE ORDERED BY USE OF PROPER DASH NUMBER.
- ⑥ RIVETS MAY HAVE SQUARE OR RADIUS END. "S" AND "T" DIMENSIONS APPLY TO RADIUS END RIVETS ONLY.
- ⑦ SEE MARKING SECTION.

DATE 17-MAR-1964 REV (W) 08-AUG-2006

CAGE CODE 81205

BACR15DS

SH 2

**RIVET,
 100 DEG SHEAR HEAD,
 (.0312 OVERSIZE SHANK)**

BACR15DS

SH 2

**BOEING PART STANDARD
 BOOK 23. DO NOT USE FOR NEW DESIGN.**

***** PSDS GENERATED *****
BOOK 23. DO NOT USE FOR NEW DESIGN.

RESTRICTED USAGE: REPAIR ONLY**NOTES (CONTINUED)**

- 8 PREVIOUS REVISIONS OF THIS STANDARD PERMITTED EITHER ANODIZE OR CONVERSION COAT FINISH. FINISH IS NOW LIMITED TO CONVERSION COAT, IDENTIFIED BY THE LETTER "C" ON THE TERMINAL (SHANK) END OF THE RIVET (SEE MARKING SECTION).
- 9 BRILES RIVET CORPORATION IS NO LONGER IN BUSINESS. RIVETS MANUFACTURED BY THE BRILES RIVET CORPORATION PRIOR TO OCTOBER 1, 1999 MAY BE RECEIVED UNTIL OCTOBER 1, 2004 PROVIDED THE ORIGINAL BRILES RIVET CORPORATION DATA CERTIFICATIONS ACCOMPANY ALL SHIPMENTS WITH A BRILES RIVET (ALLFAST FASTENING SYSTEMS INC.) CERTIFICATION OF COMPLIANCE.
- 10 SEE CODING UNDER USAGE AND APPLICATION FOR COMPLETE BOEING PART NUMBER.
- 11 AEROSPACE RIVET MANUFACTURERS CORPORATION IS NO LONGER IN BUSINESS. RIVETS MANUFACTURED BY THE AEROSPACE RIVET MANUFACTURERS CORPORATION PRIOR TO MAY 1, 2002 MAY BE RECEIVED UNTIL DEPLETED PROVIDED THE ORIGINAL AEROSPACE RIVET MANUFACTURERS CORPORATION DATA CERTIFICATIONS ACCOMPANY ALL SHIPMENTS WITH AN AEROSPACE RIVET MANUFACTURERS CORPORATION (ALLFAST FASTENING SYSTEMS INC.) CERTIFICATION OF COMPLIANCE.

PROCUREMENT SPECIFICATION

BPS-R-131, EXCEPT AS NOTED.

Ni-Cu (MONEL) RIVETS SHALL BE TESTED TO THEIR HEADING REQUIREMENTS AND SAMPLING TABLES OF BACR15DX.

MATERIAL

2017-T4 AND 7050-T73 PER QQ-A-430, EXCEPT H-15 TEMPER WIRE OR ROD MAY BE USED AS RAW MATERIAL FOR 2017-T4 RIVETS.

Ni-Cu (MONEL) PER QQ-N-281, CLASS A, ANNEALED.

HEAT TREATMENT

PER BPS-R-131.

DATE 17-MAR-1964 REV (W) 08-AUG-2006

CAGE CODE 81205

BACR15DS

SH 3

**RIVET,
100 DEG SHEAR HEAD,
(.0312 OVERSIZE SHANK)**

BACR15DS

SH 3

**BOEING PART STANDARD
BOOK 23. DO NOT USE FOR NEW DESIGN.**

***** PSDS GENERATED *****
BOOK 23. DO NOT USE FOR NEW DESIGN.

RESTRICTED USAGE: REPAIR ONLY**FINISH**

ALUMINUM: CHEMICAL CONVERSION COAT PER MIL-C-5541, CLASS 1A, CLEAR, COLORLESS. 

Ni-Cu (MONEL): NONE.

ALUMINUM RIVETS SHALL BE CAPABLE OF PASSING SALT SPRAY TESTS PER MIL-STD-1312-1 FOR 48 HOURS MINIMUM. AT THE CONCLUSION OF THE SALT SPRAY TEST, THERE SHALL BE NO VISIBLE CORROSION WHEN EXAMINED AT 10X MAGNIFICATION. LOT SAMPLING SHALL BE IN ACCORDANCE WITH ANSI/ASQC Z1.4, INSPECTION LEVEL S-3, AQL EQUIVALENT OF 6.5 PERCENT DEFECTIVE. LOT SIZE SHALL BE DEFINED IN TERMS OF POUNDS AND SAMPLING SHALL BE DEFINED IN TERMS OF NUMBERS OF RIVETS.

MARKING

MATERIAL IDENTIFICATION ON HEAD;

PER TABLE I AND THE GRAPHIC.

OVERSIZE IDENTIFICATION ON HEAD:

RIVETS MANUFACTURED ON OR AFTER JANUARY 1, 1997 REQUIRE NO OVERSIZE IDENTIFICATION MARKING. RIVETS MANUFACTURED PRIOR TO THAT DATE MAY HAVE AN INDENTED LETTER "O" OR A DEPRESSED CIRCULAR AREA ON THE HEAD, .060 MAXIMUM DIAMETER BY .010 MAX DEPTH, TO INDICATE OVERSIZE. RIVETS WITH EITHER MARKING, MANUFACTURED BEFORE JANUARY 1, 1997, MAY BE PROCURED AND USED UNTIL STOCKS ARE EXHAUSTED.

IDENTIFICATION OF CONVERSION COATED RIVETS:

ALL CONVERSION COATED RIVETS MANUFACTURED AFTER OCTOBER 1, 1995, SHALL BE MARKED WITH THE LETTER "C" ON THE TERMINAL (SHANK) END, RAISED OR DEPRESSED .020 MAX, SIZE OPTIONAL.

CONVERSION COATED RIVETS WITHOUT THE LETTER "C" MARKING MAY BE RECEIVED BY BOEING AND BOEING SUBCONTRACTORS UNTIL OCTOBER 1, 1997 PROVIDED THAT THE RIVETS WERE MANUFACTURED PRIOR TO OCTOBER 1, 1995. BOEING AND SUBCONTRACTOR STOCKS OF RIVETS WITHOUT THE "C" MARKING MAY BE USED UNTIL EXHAUSTED.

DATE 17-MAR-1964 REV (W) 08-AUG-2006

CAGE CODE 81205

BACr15DS**SH 4**

**RIVET,
100 DEG SHEAR HEAD,
(.0312 OVERSIZE SHANK)**

BACr15DS**SH 4**

**BOEING PART STANDARD
BOOK 23. DO NOT USE FOR NEW DESIGN.**

***** PSDS GENERATED *****
BOOK 23. DO NOT USE FOR NEW DESIGN.

RESTRICTED USAGE: REPAIR ONLY**PROCUREMENT**

AEROSPACE RIVET MANUFACTURERS CORP (CAGE CODE 64728)  (ALUMINUM ONLY)

ALLFAST FASTENING SYSTEMS INC (CAGE CODE 53551)

ATELIERS DE LA HAUTE-GARONNE (AHG) (CAGE CODE F0095) (ALUMINUM ONLY)

BRILES RIVET CORP (CAGE CODE 55580)  (ALUMINUM ONLY)

THE MANUFACTURERS LISTED IN BPS-R-131SUP AND THEIR AUTHORIZED DISTRIBUTORS ARE THE ONLY APPROVED SOURCES FOR THE ABOVE QUALIFIED PRODUCTS. SEE BPS-R-131SUP FOR PLANT ADDRESSES. NO CHANGES IN PRODUCT DESIGN, BASIC METHODS OF MANUFACTURE, PLANT SITE OR QUALITY LEVEL SHALL BE MADE WITHOUT PRIOR NOTIFICATION AND PRIOR APPROVAL IN WRITING FROM THE BOEING COMPANY. MANUFACTURERS OF COMPETITIVE PRODUCTS MAY APPLY TO A SUPPLIER MANAGEMENT AND PROCUREMENT DEPARTMENT OF THE BOEING COMPANY FOR QUALIFICATION. IF A MANUFACTURER IS SHOWN ON THIS STANDARD, BUT NOT LISTED IN THE SUPPLEMENT, CONTACT THE DIVISIONAL ENGINEERING STANDARDS FOCAL POINT OR ENGINEERING STANDARDS FOR VERIFICATION.

USAGE AND APPLICATION INFORMATION

USE BACR15CE RIVETS IN DESIGN. BACR15DS RIVETS ARE INTENDED FOR REPAIR AND REPLACEMENT OF BACR15CE RIVETS.

INSTALL PER BAC5004-1 OR BAC5063, AS APPLICABLE.

CODING

FIRST DASH NUMBER DESIGNATES NOMINAL DIAMETER IN .03125 INCREMENTS.

CODE LETTERS BETWEEN FIRST AND SECOND DASH NUMBER DESIGNATE MATERIAL. SEE TABLE I.

SECOND DASH NUMBER DESIGNATES NOMINAL LENGTH IN .0625 INCREMENTS.

DATE 17-MAR-1964 REV (W) 08-AUG-2006

CAGE CODE 81205


BACR15DS**SH 5**

**RIVET,
100 DEG SHEAR HEAD,
(.0312 OVERSIZE SHANK)**

BACR15DS**SH 5**

**BOEING PART STANDARD
BOOK 23. DO NOT USE FOR NEW DESIGN.**

***** PSDS GENERATED *****
BOOK 23. DO NOT USE FOR NEW DESIGN.

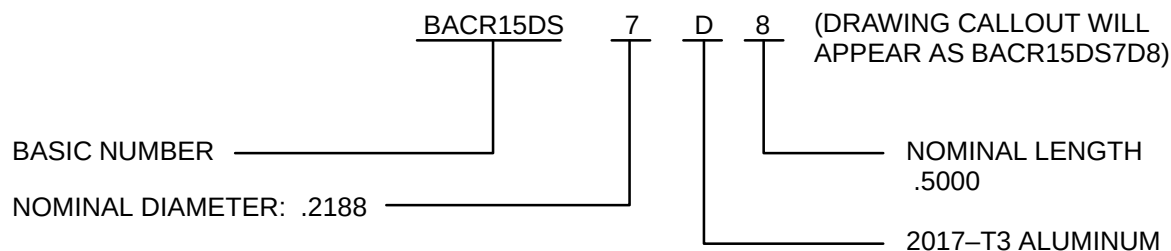RESTRICTED USAGE: REPAIR ONLY**EXAMPLE OF PART NUMBER****FASTENER CODE**

SEE BACD2074 FOR FASTENER CODES.

SEE D-590-PREFACE (INDEX) FOR INACTIVATION DEFINITIONS. SEE
D-590-SUPERSESSION-LIST FOR SUPERSESSION CLASS DEFINITIONS AND SUPERSESSION
LIST.

DATE 17-MAR-1964 REV (W) 08-AUG-2006

CAGE CODE 81205

BACR15DS**SH 6**

**RIVET,
100 DEG SHEAR HEAD,
(.0312 OVERSIZE SHANK)**

BACR15DS**SH 6**

**BOEING PART STANDARD
BOOK 23. DO NOT USE FOR NEW DESIGN.**