

Cover Page

Standard: BACR15FT Rev: (AJ) 27-Jul-2011

WARNING - The Export Control or Intellectual Property language on this page takes precedence over any such language that may appear on subsequent pages of this document.

No license is required for the dissemination of the commercial information contained herein to foreign persons other than those from or in the terrorist supporting countries identified in the United States Export Administration Regulations (EAR) (15 CFR 730-774). It is the responsibility of the individual in control of this data to abide by U.S. export laws.

ECCN EAR99


Boeing Proprietary, Distribution limited to Boeing employees and others covered by applicable proprietary information or nondisclosure agreements.

Copyright © 1992, 1995-1996, 2006, 2009, 2011 Boeing. All rights reserved.

Any reproduction of this document or portions thereof must also reproduce this page of the document.

**FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK**

BCA	P	BDS	P							
NEW DESIGN APPROVAL: P=PARTIAL, F=FULL, N=NONE										



CAGE CODE 81205

BACR15FT SH 1 OF 12

***** PSDS GENERATED *****

See Cover Page

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK

TABLE I DIMENSIONS

BOEING STANDARD NUMBER BACR15FT 15	NOM SIZE REF	Ø A		C +.010 -.000	Ø D +.0025 -.0000 1	Ø E FLAT	F	Ø G MAX 9	Ø J MAX 6	K RAD		S +.000 -.010 5	T RAD ±.010 5	X TOL
		MIN	MAX							MIN	MAX			
2 8	.062	.121	.131	.027	.0625	.031	.015	--	.072	.0401	.0695	.016	.019	.010
3 8	.094	.186	.196	.040	.0938	.046	.023	--	.110	.0673	.1000	.023	.029	
4 8	.125	.252	.262	.054	.1250	.062	.031	--	.150	.0953	.1291	.031	.039	
5	.156	.234	.247	.067	.1560	.078	.039	.253	.148	.1229	.1596	.039	.049	
6	.188	.281	.295	.080	.1870	.093	.046	.303	.171	.1516	.1911	.047	.059	
7	.219	.328	.344	.093	.2190	.110	.055	.354	.197	.1789	.2188	.055	.069	
8	.250	.375	.391	.107	.2500	.125	.062	.405	.225	.2079	.2499	.062	.078	
9	.281	.421	.439	.120	.2810	.140	.070	.455	.253	.2370	.2804	.070	.088	
10	.312	.468	.486	.133	.3120	.156	.078	.505	.281	.2662	.3110	.078	.098	
11	.344	.516	.535	.148	.3440	.172	.086	.557	.310	.2946	.3402	.086	.108	
12	.375	.563	.583	.161	.3750	.187	.093	.608	.338	.3230	.3694	.094	.117	.020
13 2	.406	.609	.630	.174	.4060	.209	.105	.658	.365	.3456	.3924	.102	.127	
14	.438	.657	.679	.189	.4375	.218	.109	.710	.394	.3731	.4279	.110	.137	
15 2	.468	.702	.725	.201	.4680	.234	.117	.758	.421	.4008	.4559	.117	.146	

DATE 22-JUL-1981 REV (AJ) 27-JUL-2011

CAGE CODE 81205

BACR15FT

SH 2

RIVET,
MODIFIED UNIVERSAL HEAD,
CLOSE TOLERANCE SHANK

BACR15FT

SH 2

***** PSDS GENERATED *****

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK

TABLE II STANDARD LENGTHS AND DASH NUMBERS  

BOEING STANDARD NUMBER BACR15FT 	NOM SIZE REF	NOMINAL RIVET LENGTH									
		.188	.250	.312	.375	.438	.500	.562	.625	.750	
		DASH NUMBER									
2 	.062	3	4	5	6	7	8	9	10	12	
3 	.094	3	4	5	6	7	8	9	10	12	
4 	.125	3	4	5	6	7	8	9	10	12	
5	.156	3	4	5	6	7	8	9	10	12	
6	.188	3	4	5	6	7	8	9	10	12	
7	.219	---	4	5	6	7	8	9	10	12	
8	.250	---	4	5	6	7	8	9	10	12	
9	.281	---	---	5	6	7	8	9	10	12	
10	.312	---	---	5	6	7	8	9	10	12	
11	.344	---	---	---	6	7	8	9	10	12	
12	.375	---	---	---	6	7	8	9	10	12	
13 	.406	---	---	---	---	7	8	9	10	12	
14	.438	---	---	---	---	---	---	---	---	---	
15 	.468	---	---	---	---	---	---	---	---	---	

DATE 22-JUL-1981 REV (AJ) 27-JUL-2011

CAGE CODE 81205

BACR15FT

SH 3

RIVET,
MODIFIED UNIVERSAL HEAD,
CLOSE TOLERANCE SHANK

BACR15FT

SH 3

***** PSDS GENERATED *****

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK

TABLE II STANDARD LENGTHS AND DASH NUMBERS ³ ⁵ (CONTINUED)

BOEING STANDARD NUMBER BACR15FT ¹⁵	NOM SIZE REF	NOMINAL RIVET LENGTH							
		.875	1.000	1.125	1.250	1.375	1.500	1.750	2.000
		DASH NUMBER							
2 ⁸	.062	14	16	---	---	---	---	---	---
3 ⁸	.094	14	16	---	---	---	---	---	---
4 ⁸	.125	14	16	---	---	---	---	---	---
5	.156	14	16	---	---	---	---	---	---
6	.188	14	16	---	---	---	---	---	---
7	.219	14	16	---	---	---	---	---	---
8	.250	14	16	---	---	---	---	---	---
9	.281	14	16	---	---	---	---	---	---
10	.312	14	16	18	---	---	---	---	---
11	.344	14	16	18	20	---	---	---	---
12	.375	14	16	18	20	22	24	28	32
13 ²	.406	14	16	18	20	22	24	28	32
14	.438	14	16	18	20	22	24	24	24
15 ²	.468	14	16	18	20	22	24	24	24

NOTES

- ¹ SHANK DIAMETER TOLERANCE +.0035, -.0000 WITHIN .10 OF BASE OF HEAD.
- ² RESTRICTED USAGE: REPAIR ONLY. THIS SIZE IS INTENDED FOR OVERSIZED REPLACEMENT ONLY - NOT TO BE USED IN NEW DESIGN.
- ³ NONSTANDARD LENGTHS NOT LISTED IN TABLE II MAY BE ORDERED IN .0625 INCREMENTS BY USE OF APPROPRIATE DASH NUMBERS. ADD THE SUFFIX "R5" TO THE SECOND DASH NUMBER FOR LENGTHS .03125 LONGER THAN INDICATED BY THE SECOND DASH NUMBER (SEE EXAMPLE OF PART NUMBER).
- ⁴ NO BURRS ARE PERMITTED IN THIS AREA. "HEADING FLASH", .030 MAXIMUM, IS PERMITTED ON THE EDGE OF THE RIVET HEAD ABOVE THE INDICATED AREA.
- ⁵ RIVETS ABOVE SOLID LINE IN TABLE II MAY BE FURNISHED WITH SQUARE OR RADIUSSED ENDS. RIVETS BELOW SOLID LINE, INCLUDING DASH NUMBERS 3, 4, 5, 6 SHALL HAVE RADIUSSED ENDS EXCEPT THE SIZE 14 RIVET (.438 DIAMETER) AND SIZE 15 RIVET (.468 DIAMETER) MAY HAVE SQUARE OR "T" RADIUS ENDS.
- ⁶ APPLICABLE TO CODE "KE" ONLY.

DATE 22-JUL-1981 REV (AJ) 27-JUL-2011

CAGE CODE 81205

BACR15FT

SH 4

RIVET,
MODIFIED UNIVERSAL HEAD,
CLOSE TOLERANCE SHANK

BACR15FT

SH 4

***** PSDS GENERATED *****

See Cover Page

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK

NOTES (CONTINUED)

- 7> WITH THE EXCEPTION OF ALLOY 2024-T4, PREVIOUS REVISIONS OF THIS STANDARD PERMITTED EITHER ANODIZE OR CONVERSION COAT FINISH UNLESS CODE "C" WAS SPECIFIED. CODE "C" RESTRICTED THE FINISH TO CONVERSION COAT ONLY. FINISH IS NOW LIMITED TO CONVERSION COAT EXCEPT FINISH FOR ALLOY 2024-T4 IS ANODIZE (NO CODE). SEE PART MARKING AND CODING SECTIONS.
- 8> SEE INACTIVATION APPLICABILITY.
- 9> EXCEPT AS NOTED, FREE FLOW OF MATERIAL DURING FORMING MAY RESULT IN AN "ALTERNATE HEAD CONFIGURATION" PER THE GRAPHIC. THE INCREASE IN DIAMETER BEYOND THE HEAD BEARING AREA (DIAMETER A) SHALL NOT EXCEED "G". THE "G" DIAMETER DOES NOT APPLY TO SIZES 2, 3 OR 4.
- 10> RIVETS MANUFACTURED BY ALCOA, RECEIVED FROM PRECISIONFORM OR THEIR AUTHORIZED DISTRIBUTORS PRIOR TO JULY 1, 1992, MAY BE USED UNTIL STOCKS ARE EXHAUSTED.
- 11> APPLY TOLERANCE TO A NOMINAL GRIP LENGTH ESTABLISHED BY MULTIPLYING THE SECOND DASH NUMBER BY .0625 AND, IF CODE "R5" IS SPECIFIED, ADDING .03125.
- 12> 2024-T4 RIVETS, MATERIAL CODE "DD", REQUIRE RESOLUTION HEAT TREATMENT AND COLD (ICE BOX) STORAGE PRIOR TO INSTALLATION AND THUS CANNOT BE USED IN KITS WHERE THEY ARE SHIPPED AS LOOSE PARTS.
- 13> SEE PART MARKING SECTION.
- 14> BRILES RIVET CORPORATION IS NO LONGER IN BUSINESS. RIVETS MANUFACTURED BY THE BRILES RIVET CORPORATION PRIOR TO OCTOBER 1, 1999 MAY BE RECEIVED UNTIL OCTOBER 1, 2004 PROVIDED THE ORIGINAL BRILES RIVET CORPORATION DATA CERTIFICATIONS ACCOMPANY ALL SHIPMENTS WITH A BRILES RIVET (ALLFAST FASTENING SYSTEMS INC.) CERTIFICATION OF COMPLIANCE.
- 15> SEE CODING UNDER USAGE AND APPLICATION FOR COMPLETE BOEING PART NUMBER.
- 16> AEROSPACE RIVET MANUFACTURERS CORPORATION IS NO LONGER IN BUSINESS. RIVETS MANUFACTURED BY THE AEROSPACE RIVET MANUFACTURERS CORPORATION PRIOR TO MAY 1, 2002 MAY BE RECEIVED UNTIL DEPLETED PROVIDED THE ORIGINAL AEROSPACE RIVET MANUFACTURERS CORPORATION DATA CERTIFICATIONS ACCOMPANY ALL SHIPMENTS WITH AN AEROSPACE RIVET MANUFACTURERS CORPORATION (ALLFAST FASTENING SYSTEMS INC.) CERTIFICATE OF COMPLIANCE.
- 17> PARTS MANUFACTURED AFTER AUGUST 31, 2004 SHALL HAVE THE ORANGE DYED CONVERSION COAT FINISH. PARTS FINISHED ONLY WITH CHEMICAL CONVERSION COAT PER [MIL-DTL-5541](#), CLASS 1A, CLEAR, COLORLESS MAY BE PROCURED AND USED UNTIL STOCKS ARE DEPLETED.

DATE 22-JUL-1981 REV (AJ) 27-JUL-2011

CAGE CODE 81205

BACR15FT**SH 5**

**RIVET,
MODIFIED UNIVERSAL HEAD,
CLOSE TOLERANCE SHANK**

BACR15FT**SH 5**

***** PSDS GENERATED *****

See Cover Page

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK

NOTES (CONTINUED)

- 18** AHG PARTS MANUFACTURED AFTER 27-JUL-2011 SHALL CONFORM TO THE NEW PART MARKING SYMBOL
- 19** RIVETS MANUFACTURED PRIOR TO MAY 21, 1996, MAY BE COLOR CLEAR, OR IRIDESCENT GOLD TO LIGHT BROWN.

PROCUREMENT SPECIFICATION

PER [BPS-R-131](#), EXCEPT AS NOTED.

MATERIAL

1100-F, 7050-T73, 2017-T4, 2024-T4 **12** AND 2117-T4. MATERIAL, INCLUDING INITIAL AND FINAL TEMPER, SHALL BE PER [QQ-A-430](#), EXCEPT 2017-H15 WIRE OR ROD MAY ALSO BE USED TO MAKE 2017-T4 RIVETS.

HEAT TREATMENT

PER [BPS-R-131](#).

FINISH

CODES "A (1100-F)" AND "D (2017-T4)" SHALL BE CHEMICAL CONVERSION COATED PER [MIL-DTL-5541](#), CLASS 1A, CLEAR, COLORLESS. **7**

CODE "AD" (2117-T4) SHALL BE CHEMICAL CONVERSION COATED PER [MIL-DTL-5541](#), CLASS 1A, CLEAR, COLORLESS. **7** **17**

CODE "AD" (2117-T4) SHALL BE ORANGE DYE (U.S. SPECIALTY COLOR CORPORATION SPECIALTY ORANGE NO. 7) APPLIED OVER CHEMICAL CONVERSION COAT PER [MIL-DTL-5541](#), CLASS 1A, GOLD/YELLOW. SEE COLOR SECTION. **17**

CODE "KE (7050-T73)" SHALL BE CHEMICAL CONVERSION COATED PER [MIL-DTL-5541](#), CLASS 1A, COLOR IRIDESCENT GOLD TO LIGHT BROWN. SEE COLOR SECTION. **19**

CODE "DD (2024-T4)" SHALL BE ANODIZED PER [MIL-A-8625](#), CLASS 1, TYPE I, IB OR II. SEE COLOR SECTION.

RIVETS SHALL BE CAPABLE OF PASSING SALT SPRAY TESTS PER [MIL-STD-1312-1](#) IN ACCORDANCE WITH NASM-1312-1. TEST DURATION SHALL BE 48 HOURS MINIMUM FOR CONVERSION COATED PARTS AND 96 HOURS MINIMUM FOR ANODIZED RIVETS. AT THE CONCLUSION OF THE SALT SPRAY TEST THERE SHALL BE NO VISIBLE CORROSION WHEN EXAMINED AT 10X MAGNIFICATION. SAMPLING SHALL BE IN ACCORDANCE WITH [ANSI/ASQ Z1.4](#), INSPECTION LEVEL S3, AQL EQUIVALENT OF 6.5 PERCENT NONCONFORMING. LOT SIZE SHALL BE DEFINED IN TERMS OF POUNDS AND SAMPLING SHALL BE DEFINED IN TERMS OF NUMBERS OF RIVETS.

DATE 22-JUL-1981 REV (AJ) 27-JUL-2011

CAGE CODE 81205

BACR15FT**SH 6**

**RIVET,
MODIFIED UNIVERSAL HEAD,
CLOSE TOLERANCE SHANK**

BACR15FT**SH 6**

***** PSDS GENERATED *****

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK

MARKING**MATERIAL IDENTIFICATION ON HEAD**

MARK 2017, 2117, 2024 AND 7050 RIVETS IN ACCORDANCE WITH THE GRAPHIC. NO MARK INDICATES ALLOY 1100.


MANUFACTURER'S SYMBOL ON HEAD. SEE [FIGURE 1](#) FOR AHG HEAD MARKING CHANGE.

REQUIRED FOR ALL RIVETS .125 DIAMETER AND ABOVE MANUFACTURED AFTER JULY 1, 1992 AND OPTIONAL FOR ALL OTHER RIVETS.

IDENTIFICATION OF CONVERSION COATED ALUMINUM RIVETS

CONVERSION COATED RIVETS (INCLUDING ORANGE DYED CONVERSION COATED 2117-T4 RIVETS) MANUFACTURED AFTER NOVEMBER 1, 1995 SHALL BE MARKED WITH THE LETTER "C" ON THE TERMINAL (SHANK) END, RAISED OR DEPRESSED .020 MAXIMUM, SIZE OPTIONAL. "C" MARKING IS OPTIONAL ON RIVETS MANUFACTURED PRIOR TO THAT DATE.

CONVERSION COATED RIVETS WITHOUT THE "C" MARKING MAY BE RECEIVED BY BOEING AND THEIR SUBCONTRACTORS UNTIL NOVEMBER 1, 1997 PROVIDED THAT THE RIVETS WERE MANUFACTURED PRIOR TO NOVEMBER 1, 1995. EXISTING STOCKS OF RIVETS WITHOUT THE "C" MARKING MAY BE USED UNTIL DEPLETED.

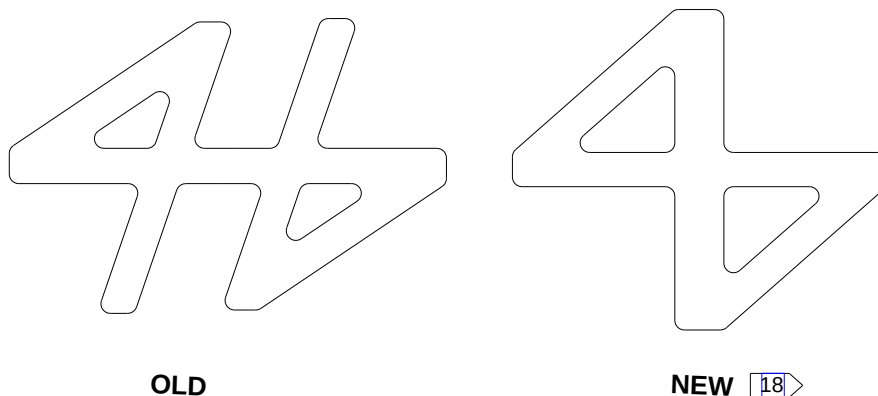**FIGURE 1 - NEW AHG SYMBOL****PACKAGING**

THE FOLLOWING PACKAGING REQUIREMENTS ARE MANDATORY FOR ALL MATERIALS EXCEPT ALLOY 2024.

DATE 22-JUL-1981 REV (AJ) 27-JUL-2011

CAGE CODE 81205

BACR15FT**SH 7**

**RIVET,
MODIFIED UNIVERSAL HEAD,
CLOSE TOLERANCE SHANK**

BACR15FT**SH 7**

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK

PACKAGING (CONTINUED)

RIVETS OF THE SAME LOT, STYLE, SIZE AND PART NUMBER SHALL BE PACKED IN ONE POUND SEALED PLASTIC BAGS. THE ONE POUND BAGS SHALL BE PACKED IN INTERMEDIATE OR UNIT CONTAINERS (RIVET BOX) WHICH CONTAIN A MAXIMUM NET WEIGHT OF TEN POUNDS. FINAL PACKAGING SHALL BE IN ACCORDANCE WITH [BPS-R-131](#).

THE FOLLOWING INFORMATION SHALL BE MARKED ON THE OUTSIDE OF EACH ONE POUND BAG AND EACH INTERMEDIATE OR UNIT CONTAINER.

- a. DATE OF MANUFACTURE OR HEAT TREAT.
- b. MANUFACTURER'S LOT NUMBER.
- c. BOEING PART NUMBER.
- d. NAME OF MANUFACTURER.
- e. BAR CODE WHEN AND AS SPECIFIED ON PURCHASE ORDER.

ALLOY 2024 RIVETS SHALL BE PACKAGED IN ACCORDANCE WITH [BPS-R-131](#).

NOTE: PACKAGING REQUIREMENTS FOR ALLOY 2024 ARE DIFFERENT BECAUSE 2024 IS RESOLUTION HEAT TREATED PRIOR TO PRODUCTION USE.

COLOR

- | | |
|--|---|
| CODES "A (1100-F)" AND "D (2017-T4)" ("C" FINISH CODE) | - CLEAR, COLORLESS. |
| CODE "AD (2117-T4)" ("C" FINISH CODE) | - CLEAR, COLORLESS. 17 |
| CODE "AD (2117-T4)" ("C" FINISH CODE) | - ORANGE NO. 12300 OR ORANGE NO. 22544 PER FED-STD-595 . 17 ISOLATED AREAS DEVOID OF ORANGE DYE ARE ACCEPTABLE PROVIDED THE NON-COVERED AREAS DO NOT EXCEED 20 PERCENT OF THE TOTAL RIVET SURFACE AREA. |
| CODE "KE (7050-T73)" ("C" FINISH CODE) | - IRIDESCENT GOLD TO LIGHT BROWN. 19 |
| CODE "DD (2024-T4)" (NO CODE) | - NATURAL, COLORLESS. |

PROCUREMENT [10](#)

AEROSPACE RIVET MANUFACTURERS CORP (CAGE CODE 64728) [16](#)
ALLFAST FASTENING SYSTEMS INC (CAGE CODE 53551)

DATE 22-JUL-1981 REV (AJ) 27-JUL-2011

CAGE CODE 81205

BACR15FT

SH 8

RIVET,
MODIFIED UNIVERSAL HEAD,
CLOSE TOLERANCE SHANK

BACR15FT

SH 8

***** PSDS GENERATED *****

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK

PROCUREMENT ¹⁰ (CONTINUED)

ATELIERS DE LA HAUTE-GARONNE (AHG) (CAGE CODE F0095)

BRILES RIVET CORP (CAGE CODE 55580) ¹⁴

THE MANUFACTURERS LISTED IN [BPS-R-131SUP](#) AND THEIR AUTHORIZED DISTRIBUTORS ARE THE ONLY APPROVED SOURCES FOR THE ABOVE QUALIFIED PRODUCTS. SEE [BPS-R-131SUP](#) FOR PLANT ADDRESSES. NO CHANGES IN PRODUCT DESIGN, BASIC METHODS OF MANUFACTURE, PLANT SITE OR QUALITY LEVEL SHALL BE MADE WITHOUT PRIOR NOTIFICATION AND PRIOR APPROVAL IN WRITING FROM THE BOEING COMPANY. MANUFACTURERS OF COMPETITIVE PRODUCTS MAY APPLY TO A SUPPLIER MANAGEMENT DEPARTMENT OF THE BOEING COMPANY FOR QUALIFICATION. IF A MANUFACTURER IS SHOWN ON THIS STANDARD, BUT NOT LISTED IN THE SUPPLEMENT, CONTACT THE DIVISIONAL ENGINEERING STANDARDS FOCAL POINT OR ENGINEERING STANDARDS FOR VERIFICATION.

ALLFAST FASTENING SYSTEMS, INC HAS NOTIFIED BOEING OF ALLFAST U.S. PATENT NO. 7,413,777 ENTITLED "COATING COMPOSITION AND METHODS OF COATING".

USAGE AND APPLICATION INFORMATION**CODING**

FIRST DASH NUMBER DESIGNATES NOMINAL DIAMETER IN .03125 INCREMENTS.
ADD CODE LETTER FOR MATERIAL AFTER FIRST DASH NUMBER, AS FOLLOWS:

A	=	1100 ALUMINUM ALLOY
AD	=	2117 ALUMINUM ALLOY
D	=	2017 ALUMINUM ALLOY
DD	=	2024 ALUMINUM ALLOY ¹²
KE	=	7050 ALUMINUM ALLOY

SECOND DASH NUMBER DESIGNATES NOMINAL LENGTH IN .0625 INCREMENTS.

"R5" AFTER SECOND DASH NUMBER DESIGNATES LENGTHS .03125 LONGER THAN INDICATED BY SECOND DASH NUMBER.

FOR ALLOYS 1100, 2017, 2117, AND 7050: CODE "C" AT THE END OF THE PART NUMBER DESIGNATES CHEMICAL CONVERSION COATING. ⁷

FOR ALLOYS 1100, 2017 AND 2117: "NO CODE" AT THE END OF THE PART NUMBER ALSO DESIGNATES CHEMICAL CONVERSION COATING. ⁷

FOR ALLOY 2024: "NO CODE" AT THE END OF THE PART NUMBER DESIGNATES ANODIZE.

DATE 22-JUL-1981 REV (AJ) 27-JUL-2011

CAGE CODE 81205

BACR15FT**SH 9**


**RIVET,
MODIFIED UNIVERSAL HEAD,
CLOSE TOLERANCE SHANK**

BACR15FT**SH 9**

***** PSDS GENERATED *****

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK

EXAMPLE OF PART NUMBER

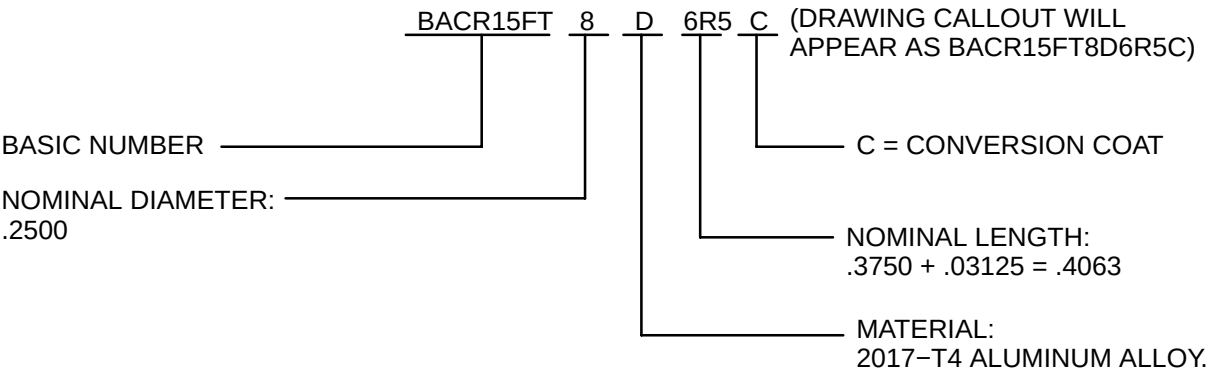

FASTENER CODE

SEE [BACD2074](#) FOR FASTENER CODES.

SUPERSESSION INFORMATION

TABLE III BCA AND BDS SUPERSESSION INFORMATION

OBSOLETE PART NUMBERS	SUPERSEDING PART NUMBERS	SUPERSESSION CLASS
BACR15FT(2 THRU 4)A()	BACR15BB (2 THRU 4)A()C	I
BACR15FT(2 THRU 4)A()C	BACR15BB (2 THRU 4)A()C	I
BACR15FT(2 THRU 4)AD()	BACR15BB (2 THRU 4)AD()C	I
BACR15FT(2 THRU 4)AD()C	BACR15BB (2 THRU 4)AD()C	I
BACR15FT(2 THRU 4)D()	BACR15BB (2 THRU 4)D()C	I
BACR15FT(2 THRU 4)D()C	BACR15BB (2 THRU 4)D()C	I
BACR15FT(2 THRU 4)DD()	BACR15BB (2 THRU 4)DD()	I
BACR15FT(2 THRU 4)DD()C	BACR15BB (2 THRU 4)DD()	I
BACR15FT(2 THRU 4)KE()	BACR15FT(2 THRU 4)KE()C	II

DATE 22-JUL-1981 REV (AJ) 27-JUL-2011

CAGE CODE 81205

BACR15FT
SH 10

**RIVET,
MODIFIED UNIVERSAL HEAD,
CLOSE TOLERANCE SHANK**

BACR15FT
SH 10

***** PSDS GENERATED *****

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK

SUPERSESSSION INFORMATION (CONTINUED)**TABLE IV BCA SUPERSESSSION INFORMATION**

OBSOLETE PART NUMBERS	SUPERSEDING PART NUMBERS	SUPERSESSSION CLASS
BACR15FT(5 THRU 15)A()	BACR15FT(5 THRU 15)A()C	II
BACR15FT(5 THRU 15)AD()	BACR15FT(5 THRU 15)AD()C	II
BACR15FT(5 THRU 15)D()	BACR15FT(5 THRU 15)D()C	II
BACR15FT(5 THRU 15)DD()C	BACR15FT(5 THRU 15)DD()	II
BACR15FT(5 THRU 15)KE()	BACR15FT(5 THRU 15)KE()C	V

DATE 22-JUL-1981 REV (AJ) 27-JUL-2011

CAGE CODE 81205

BACR15FT**SH 11**

**RIVET,
MODIFIED UNIVERSAL HEAD,
CLOSE TOLERANCE SHANK**

BACR15FT**SH 11**

***** PSDS GENERATED *****

FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK

SEE [D-590-PREFACE](#) (INDEX) FOR INACTIVATION DEFINITIONS. SEE [D-590-SUPERSESSION-LIST](#) FOR SUPERSESSION CLASS DEFINITIONS AND SUPERSESSION LIST.

INACTIVATION APPLICABILITY

- BCA, BDS
 - BACR15FT(2,3,4)(A,D,AD)() ARE INACTIVE FOR DESIGN AND PROCUREMENT. SEE [TABLE III](#) FOR SUPERSESSION INFORMATION.

BACR15FT(2,3,4)(A,D,AD)()C ARE INACTIVE FOR DESIGN AND PROCUREMENT. SEE [TABLE III](#) FOR SUPERSESSION INFORMATION.

BACR15FT(2,3,4)DD() ARE INACTIVE FOR DESIGN AND PROCUREMENT. SEE [TABLE III](#) FOR SUPERSESSION INFORMATION.

BACR15FT(2,3,4)DD()C ARE INACTIVE FOR DESIGN AND PROCUREMENT. SEE [TABLE III](#) FOR SUPERSESSION INFORMATION.

BACR15FT(2,3,4)KE() ARE INACTIVE FOR DESIGN AND PROCUREMENT. SEE [TABLE III](#) FOR SUPERSESSION INFORMATION.

BACR15FT(2,3,4)KE()C ARE INACTIVE FOR NEW DESIGN.

SEE MARKING SECTION FOR EFFECTIVITY OF "C" MARKING REQUIREMENTS.
- BCA
 - BACR15FT(5-15)KE() RIVETS (NO CODE) ARE INACTIVE FOR DESIGN AND PROCUREMENT. SEE [TABLE IV](#) FOR SUPERSESSION INFORMATION.

BACR15FT(5-15)(DD)()C RIVETS ARE INACTIVE FOR DESIGN AND PROCUREMENT. SEE [TABLE IV](#) FOR SUPERSESSION INFORMATION.

BACR15FT(5-15)(A,D,AD)() RIVETS (NO CODE) ARE INACTIVE FOR DESIGN AND PROCUREMENT. SEE [TABLE IV](#) FOR SUPERSESSION INFORMATION.
- BDS
 - BACR15FT(5-15)(DD)()C RIVETS ARE INACTIVE FOR NEW DESIGN.

DATE 22-JUL-1981 REV (AJ) 27-JUL-2011

CAGE CODE 81205

BACR15FT
SH 12

RIVET,
MODIFIED UNIVERSAL HEAD,
CLOSE TOLERANCE SHANK

BACR15FT
SH 12