

Cover Page

Standard: BACR15GE Rev: (D) 23-Oct-2006

WARNING - The Export Control or Intellectual Property language on this page takes precedence over any such language that may appear on subsequent pages of this document.

No license is required for the dissemination of the commercial information contained herein to foreign persons other than those from or in the terrorist supporting countries identified in the United States Export Administration Regulations (EAR) (15 CFR 730-774). It is the responsibility of the individual in control of this data to abide by U.S. export laws.

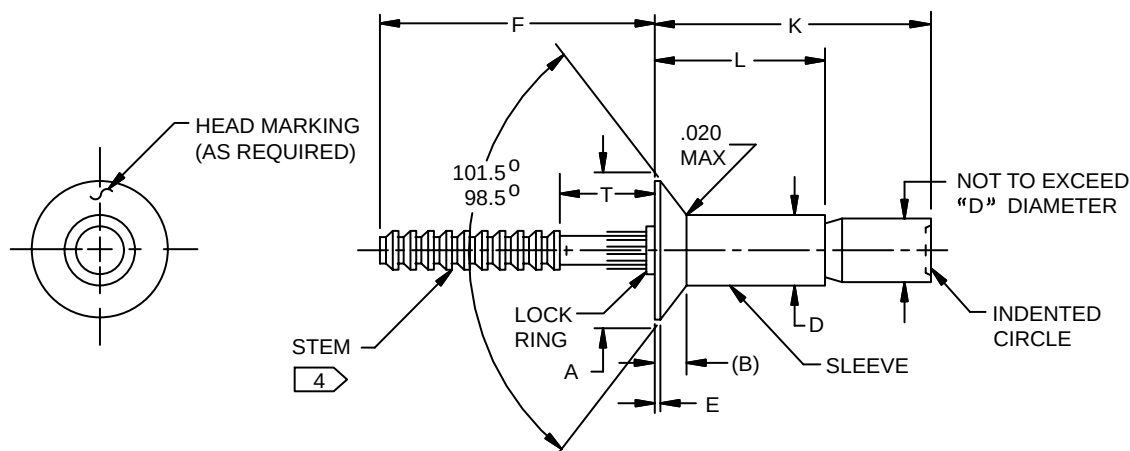
ECCN EAR99

Boeing Proprietary, Distribution limited to Boeing employees and others covered by applicable proprietary information or nondisclosure agreements.

Copyright © 1994, 1996, 1998, 2006 Boeing. All rights reserved.

Any reproduction of this document or portions thereof must also reproduce this page of the document.

***** PSDS GENERATED *****

BOOK 23. DO NOT USE FOR NEW DESIGN.FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCKDIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.
DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED.**TABLE I RIVET DIMENSIONS**

BOEING STANDARD NUMBER BACR15GE 1	NOMINAL DIAMETER	$\varnothing A$ $\pm .004$	B REF	$\varnothing D$ $+.003$ $-.001$ 2	E $\pm .005$	F MIN	T MAX
3	.094	.179	.036	.094	.010	.750	.300

TABLE II GRIP AND LENGTH DIMENSIONS

GRIP (SECOND DASH NUMBER) 1		2	3	4	5	6	7	8	9
L (MAX)		.229	.291	.354	.416	.479	.542	.605	.668
K (MAX)		.390	.505	.620	.735	.850	.965	1.080	1.195
GRIP 3	MIN	.063	.126	.188	.251	.313	.376	.438	.501
	MAX	.125	.187	.250	.312	.375	.437	.500	.562
MINIMUM BLIND SIDE CLEARANCE REF		.235	.288	.340	.393	.445	.498	.550	.603

TECHNICAL CHANGES IDENTIFIED BY REVISION BAR.

DATE 02-FEB-1994 REV (D) 23-OCT-2006

CAGE CODE 81205

BACr15GE
SH 1 OF 4**RIVET,
BLIND, 100 DEG FLUSH HEAD,
LOCKED STEM, SELF-PLUGGING****BACr15GE**
SH 1 OF 4**BOEING PART STANDARD
BOOK 23. DO NOT USE FOR NEW DESIGN.**

***** PSDS GENERATED *****

BOOK 23. DO NOT USE FOR NEW DESIGN.FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK**NOTES**

- 1 SEE USAGE AND APPLICATION SECTION FOR COMPLETE BOEING PART NUMBER.
- 2 AN INCREASE OF .001 IS PERMISSIBLE WITHIN .100 OF BASE OF HEAD.
- 3 SHEET THICKNESS FOR MACHINE COUNTERSUNK HOLES SHALL NOT BE LESS THAN DIMENSIONS "B" PLUS .010 (SEE TABLE I).
- 4 STEM MAY BE COLD WORKED OR COLD WORKED AND ANNEALED, AS NECESSARY, TO ACHIEVE SPECIFIED PROPERTIES.

PROCUREMENT SPECIFICATION

NAS1400, EXCEPT AS OTHERWISE SPECIFIED HEREIN.

WHEN TESTED PER NAS1400, SHEAR STRENGTH SHALL BE IN ACCORDANCE WITH TABLE III.

TABLE III SHEAR STRENGTH

GRIP NUMBER (SECOND DASH NUMBER)	MAX GRIP (REF)	SINGLE SHEAR STRENGTH LBS, MIN
2	.125	453
3 AND ABOVE	.187 AND ABOVE	543

MATERIAL

- SLEEVE – A286 CRES PER AMS 5731 OR AMS 5737
STEM – A286 CRES PER AMS 5731
LOCK RING – NICKEL-COPPER (MONEL) PER QQ-N-281

FINISH

WHEN SPECIFIED BY CODING, FINISH AS FOLLOWS:

CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2

PASSIVATE PER AMS 2700, TYPE OPTIONAL

DATE 02-FEB-1994 REV (D) 23-OCT-2006

CAGE CODE 81205

BACr15GE**SH 2****RIVET,
BLIND, 100 DEG FLUSH HEAD,
LOCKED STEM, SELF-PLUGGING****BACr15GE****SH 2****BOEING PART STANDARD
BOOK 23. DO NOT USE FOR NEW DESIGN.**

***** PSDS GENERATED *****

BOOK 23. DO NOT USE FOR NEW DESIGN.FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK**MARKING**

RIVET HEADS SHALL BE MARKED AS FOLLOWS: NO HEAD MARKING FOR CHERRY FASTENERS, ONE DOT FOR ALLFAST FASTENERS, AS SHOWN IN THE GRAPHIC. THE STEM SHALL BE MARKED WITH AN INDENTED CIRCLE, INDICATING A FULLY SERRATED SHANK, AS SHOWN IN THE GRAPHIC.

THE MANUFACTURER'S IDENTIFICATION HEAD MARK IS REQUIRED FOR PARTS MANUFACTURED AFTER JANUARY 1, 1996. PARTS WITHOUT HEAD MARKING, MANUFACTURED PRIOR TO THAT DATE, MAY BE PROCURED AND USED UNTIL STOCKS ARE EXHAUSTED.

PROCUREMENT

ALLFAST FASTENING SYSTEMS INC, 15200 DON JULIAN RD, CITY OF INDUSTRY CA 91745
(CAGE CODE 53551)

CHERRY AEROSPACE LLC, 1224 E WARNER AVE, SANTA ANA CA 92707
(CAGE CODE 11815)

THE MANUFACTURERS LISTED AND THEIR AUTHORIZED DISTRIBUTORS ARE THE ONLY APPROVED SOURCES FOR THE ABOVE QUALIFIED PRODUCTS. NO CHANGES IN PRODUCT DESIGN, BASIC METHODS OF MANUFACTURE, PLANT SITE OR QUALITY LEVEL SHALL BE MADE WITHOUT PRIOR NOTIFICATION AND PRIOR APPROVAL IN WRITING FROM THE BOEING COMPANY. MANUFACTURERS OF COMPETITIVE PRODUCTS MAY APPLY TO A SUPPLIER MANAGEMENT AND PROCUREMENT DEPARTMENT OF THE BOEING COMPANY FOR QUALIFICATION.

DATE 02-FEB-1994 REV (D) 23-OCT-2006

CAGE CODE 81205

BACr15GE**SH 3**

**RIVET,
BLIND, 100 DEG FLUSH HEAD,
LOCKED STEM, SELF-PLUGGING**

BACr15GE**SH 3**

**BOEING PART STANDARD
BOOK 23. DO NOT USE FOR NEW DESIGN.**

***** PSDS GENERATED *****

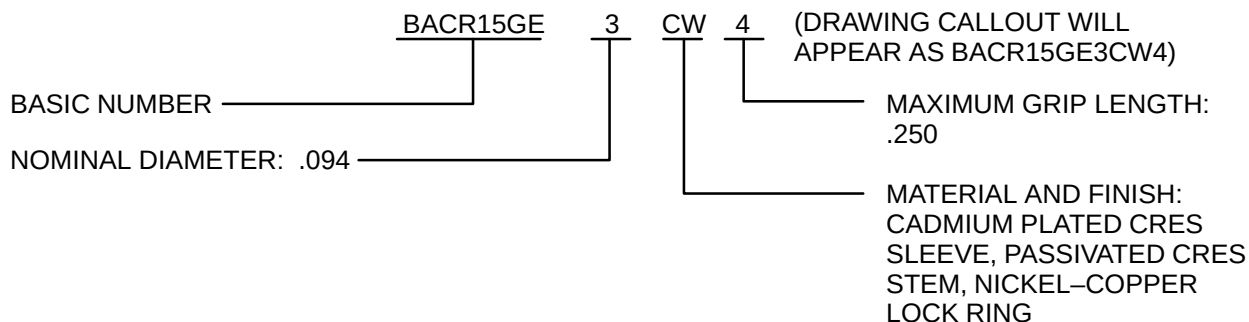
BOOK 23. DO NOT USE FOR NEW DESIGN.FOR STATUS OF INACTIVATION
SEE APPLICABILITY BLOCK**USAGE AND APPLICATION INFORMATION****CODING**

FIRST DASH NUMBER DESIGNATES NOMINAL DIAMETER IN .0312 INCREMENTS.

LETTER "C" FOLLOWING FIRST DASH NUMBER DESIGNATES A PASSIVATED A286 CRES SLEEVE AND STEM AND A NICKEL-COPPER (MONEL) LOCK RING WITH NO FINISH.

LETTERS "CW" FOLLOWING FIRST DASH NUMBER DESIGNATE A CADMIUM PLATED A286 SLEEVE, A PASSIVATED A286 STEM AND A NICKEL-COPPER (MONEL) LOCK RING WITH NO FINISH.

SECOND DASH NUMBER DESIGNATES THE MAXIMUM GRIP LENGTH IN .0625 INCREMENTS.

EXAMPLE OF PART NUMBER**FASTENER CODE**

SEE BACD2074.

SEE D-590-PREFACE (INDEX) FOR INACTIVATION DEFINITIONS. SEE D-590-SUPERSESSION-LIST FOR SUPERSESSION CLASS DEFINITIONS AND SUPERSESSION LIST.

INACTIVATION APPLICABILITY**BCA, BH, IDS -**BACR15GE3C() AND BACR15GE3CW() ARE INACTIVE FOR NEW DESIGN.
SEE NAS1399C3A() AND NAS1399CW3A() RESPECTIVELY.

DATE 02-FEB-1994 REV (D) 23-OCT-2006

CAGE CODE 81205

BACR15GE**SH 4****RIVET,
BLIND, 100 DEG FLUSH HEAD,
LOCKED STEM, SELF-PLUGGING****BACR15GE****SH 4****BOEING PART STANDARD
BOOK 23. DO NOT USE FOR NEW DESIGN.**