


OVERVIEW

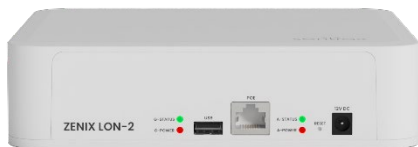

The **ZENIX LON-2** is a high-performance indoor locator and gateway powered by advanced **Angle of Arrival (AoA)** technology for precise, **real-time tracking**. It captures data from Sentrax **PINIX AoA beacons**, extracts BLE PDU data, and performs fast on-device processing through a **dual-core & ARM-based edge computation engine**, ensuring low latency and highly accurate angle measurements even in complex environments.

Designed for enterprise RTLS deployments, the **ZENIX LON-2** provides **sub-meter accuracy** for assets and people across smart buildings, healthcare, and industrial facilities. Its intelligent edge processing enhances performance, while its optimized design supports **fast installation, seamless scalability, and cost-efficient deployment** for large-scale location systems.

ENCLOSURE

Type:

BLE 5.x AoA Scanner

Dimensions:

240 mm (W) x 240 mm (L) x 60 mm (H)

Protection Class:

IP40

Material:

ABS UL94V-0

Color:

Off-White

Weight:

950 g

SENSORS AND INTERFACES

Azimuth Angle	0 – 359 deg (± 5 deg)
Elevation Angle	0 – 90 deg (± 5 deg)
Internal Temp.	0 – 60°C
Button	Device reset button
LED	Status and Power LEDs

FEATURES

- High-Speed Angle Computation
- Beacon PDU Extraction
- Remote Device configuration
- AoA filtering for Precise Tracking
- Edge Processing Capability

SOFTWARE - CONNECTIVITY

Sentrax's Solix RTLS Platform & MQTT*

CERTIFICATIONS

CE & FCC

ENVIRONMENT

Frequency:

2.4GHz

Sensing:

Protocol	BLE 5.1
Rx-Sensitivity	-90 dBm
Antenna	Array Antenna
Range	5–30m**

HARDWARE - CONNECTIVITY

Power Consumption	5 Watts
Communication	RJ45 - Ethernet (POE) WIFI - 2.4GHz b/g/n
Power Options	RJ45 - POE 802.3at DC - 12 VDC

ACCESSORIES


- DC 12V/2A Adapter
- POE Communication Cable
- Ceiling Mount
- Mounting Screws

OPERATING ENVIRONMENT

Temperature Range	0°C to 60°C
Operating Humidity	90%

*. Can be configured to send data on local/client's MQTT broker


**. Distance performance depends on the deployment environment and ceiling height.

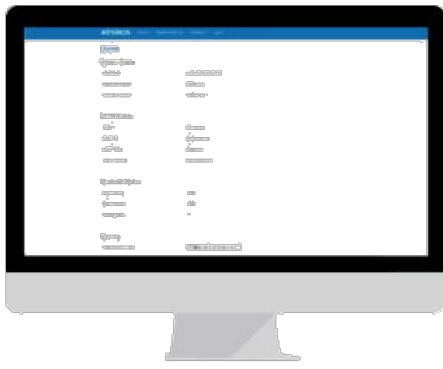

CONFIGURATION PORTAL

The ZENIX Configuration Portal is an embedded web-based interface designed for simplified device configuration and management. It allows users to monitor device status, modify operational parameters, connect the device to a Wi-Fi network, and manage system settings with ease. The portal also supports configuration backup and restore functions, as well as secure firmware upgrades, ensuring efficient maintenance and streamlined deployment.

MECHANICAL DRAWINGS

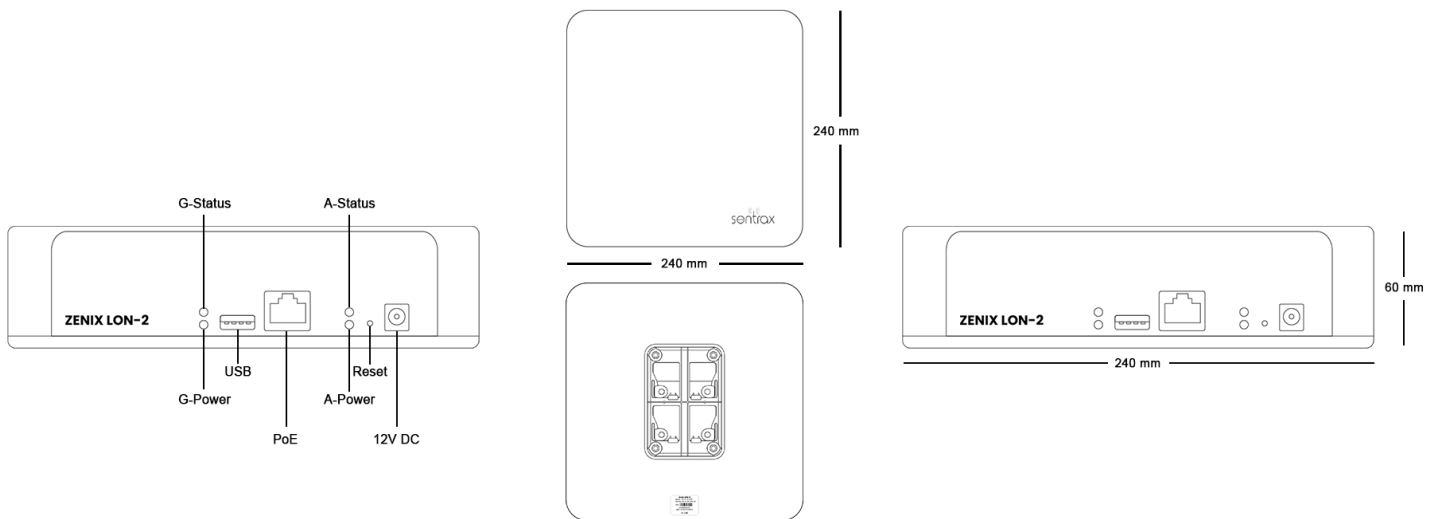

APPLICATION AREAS

- Indoor Localization
- Person's Positioning
- Location-based Services
- Asset & Logistics Tracking

CAUTION



- Risk of Fire if power is given of an incorrect type or voltage.
- The Antenna port is output on

RECYCLING

This product bears the selective sorting symbol for Waste from Electrical and Electronic Equipment (WEEE). This means that this product must be handled pursuant to the European directive 2012/19/EU in order to be recycled or dismantled to minimize its impact on the environment.

All product names, logos, and brands are the property of their respective owners. All companies, product, and service names used in this datasheet are for identification purposes only. Use of these names, logos, and brands does not imply endorsement.



CONNECT WITH US



www.sentrax.com



support@sentrax.com

Copyright © 2026, Sentrax.
All Rights Reserved.