


A BLE packet was defined to be seven bytes with the first byte selecting which setting will be updated with the following six bytes. Since not all settings required six bytes some of the bytes are unused, indicated by NA, and reserved for future board revisions.

BT_CONFIG_LIGHT

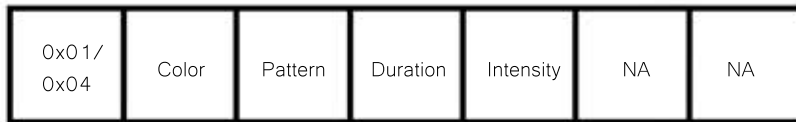


Configure LED Parameters

Color: RED (0x0), YELLOW (0x1), GREEN (0x2), CYAN (0x3),

BLUE (0x4), MAGENTA (0x5), WHITE (0x6)

Pattern: SMOOTH (0x0), BOUNCE (0x1), ZIGZAG (0x2), BYPASS (0x3)


BT_CONFIG_ALARM



Configure Alarm Parameters


Pattern: TWEETS (0x0), CYBORG (0x1), BOOBOO (0x2)

BT_REGISTER_DEVICE



Will send a unique ID to the BLE linked device for registering the handlebar.

BT_TIME_SYNC



Sets the current date and time.