




MIKROE 1

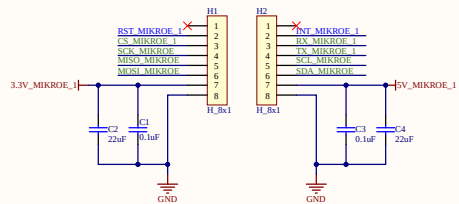


MIKROE 2

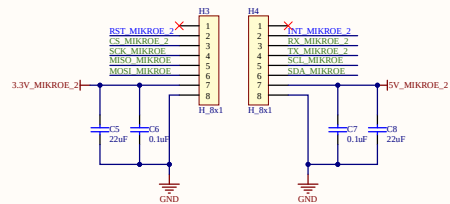


MINI PCIE 2

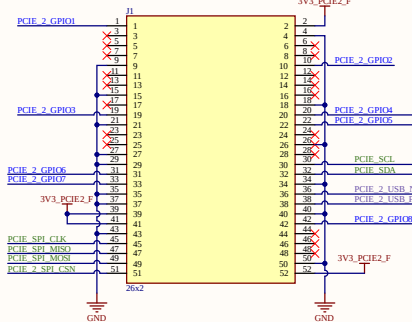


FILTERING




MINI PCIE 1 / LTE

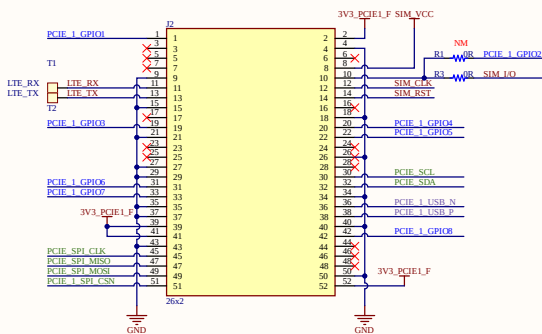



SIM CARD

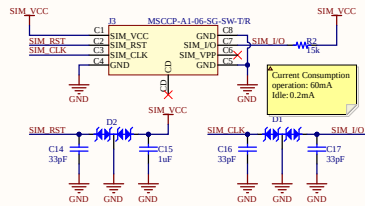


FILTERING




GPIO EXPANDER 1

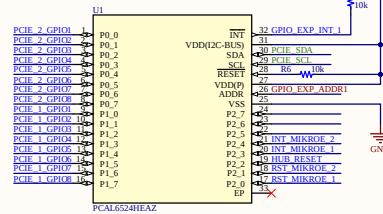



NVME M2

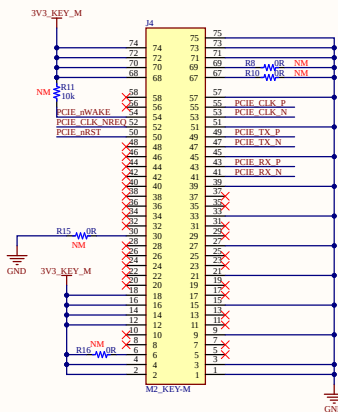

FILTERING





GPIO EXPANDER 2

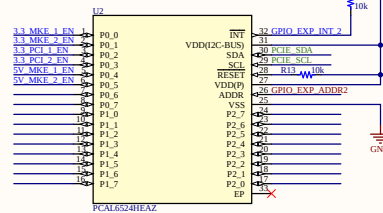


Title		
Size	Number	Revision
A2		
Date:	5/09/2026	Sheet of
File:	C:\Users\...Connectors\SchDoc	Drawn By:


IC HUB

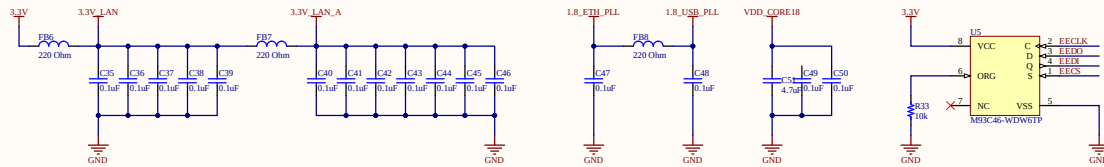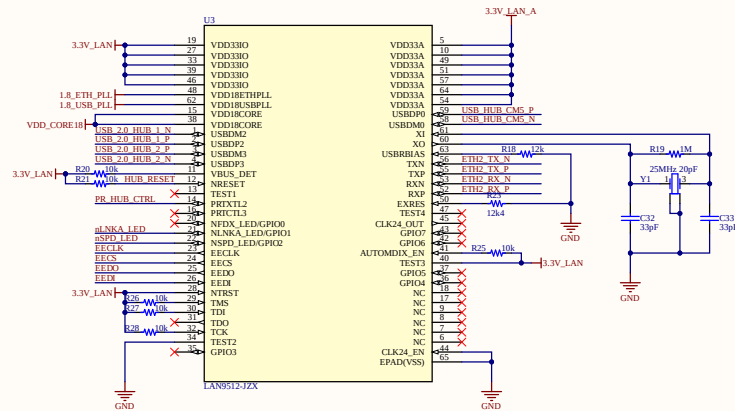


USB C Switch

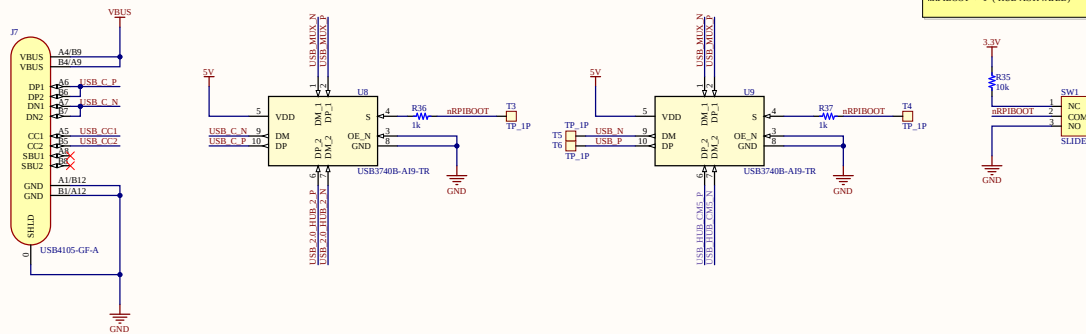

ETHERNET HUB CONNECTOR

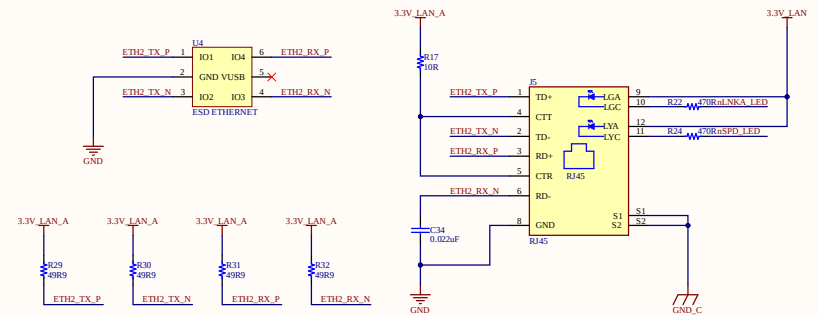

USB HUB CONNECTOR

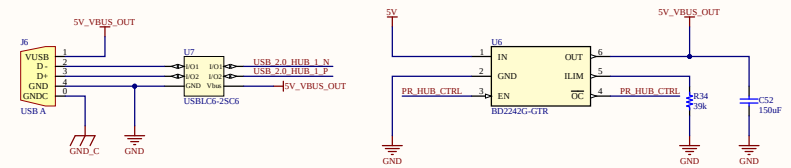

Title		
Size A2	Number	Revision
Date: 5/09/2026	Sheet of	
File: C:\Users\1100_USB_HUB\SchDoc	Drawn By:	

The diagram illustrates a DCDC converter circuit. The input is a 5.325V source connected to the IN pin of the AOZ2264NQ1-11 IC (U13). The IC is configured with various pins: IN, IN, IN, TON, VCC, EN/DISCHG, PGOOD, SS, OCS, MODE, and AGND. The output is a 3.738V source connected to the LX pin of the IC. The circuit includes several capacitors (C70, C71, C72, C78, C79, C80, C81, C82, C83, C84, C85, C86, C87, C88, C89, C90, C91, C92, C93, C94, C95, C96, C97, C98, C99, C100, C101, C102, C103, C104, C105, C106, C107, C108, C109, C110, C111, C112, C113, C114, C115, C116, C117, C118, C119, C120, C121, C122, C123, C124, C125, C126, C127, C128, C129, C130, C131, C132, C133, C134, C135, C136, C137, C138, C139, C140, C141, C142, C143, C144, C145, C146, C147, C148, C149, C150, C151, C152, C153, C154, C155, C156, C157, C158, C159, C160, C161, C162, C163, C164, C165, C166, C167, C168, C169, C170, C171, C172, C173, C174, C175, C176, C177, C178, C179, C180, C181, C182, C183, C184, C185, C186, C187, C188, C189, C190, C191, C192, C193, C194, C195, C196, C197, C198, C199, C200, C201, C202, C203, C204, C205, C206, C207, C208, C209, C210, C211, C212, C213, C214, C215, C216, C217, C218, C219, C220, C221, C222, C223, C224, C225, C226, C227, C228, C229, C230, C231, C232, C233, C234, C235, C236, C237, C238, C239, C240, C241, C242, C243, C244, C245, C246, C247, C248, C249, C250, C251, C252, C253, C254, C255, C256, C257, C258, C259, C260, C261, C262, C263, C264, C265, C266, C267, C268, C269, C270, C271, C272, C273, C274, C275, C276, C277, C278, C279, C280, C281, C282, C283, C284, C285, C286, C287, C288, C289, C290, C291, C292, C293, C294, C295, C296, C297, C298, C299, C300, C301, C302, C303, C304, C305, C306, C307, C308, C309, C310, C311, C312, C313, C314, C315, C316, C317, C318, C319, C320, C321, C322, C323, C324, C325, C326, C327, C328, C329, C330, C331, C332, C333, C334, C335, C336, C337, C338, C339, C340, C341, C342, C343, C344, C345, C346, C347, C348, C349, C350, C351, C352, C353, C354, C355, C356, C357, C358, C359, C360, C361, C362, C363, C364, C365, C366, C367, C368, C369, C370, C371, C372, C373, C374, C375, C376, C377, C378, C379, C380, C381, C382, C383, C384, C385, C386, C387, C388, C389, C390, C391, C392, C393, C394, C395, C396, C397, C398, C399, C400, C401, C402, C403, C404, C405, C406, C407, C408, C409, C410, C411, C412, C413, C414, C415, C416, C417, C418, C419, C420, C421, C422, C423, C424, C425, C426, C427, C428, C429, C430, C431, C432, C433, C434, C435, C436, C437, C438, C439, C440, C441, C442, C443, C444, C445, C446, C447, C448, C449, C450, C451, C452, C453, C454, C455, C456, C457, C458, C459, C460, C461, C462, C463, C464, C465, C466, C467, C468, C469, C470, C471, C472, C473, C474, C475, C476, C477, C478, C479, C480, C481, C482, C483, C484, C485, C486, C487, C488, C489, C490, C491, C492, C493, C494, C495, C496, C497, C498, C499, C500, C501, C502, C503, C504, C505, C506, C507, C508, C509, C510, C511, C512, C513, C514, C515, C516, C517, C518, C519, C520, C521, C522, C523, C524, C525, C526, C527, C528, C529, C530, C531, C532, C533, C534, C535, C536, C537, C538, C539, C540, C541, C542, C543, C544, C545, C546, C547, C548, C549, C550, C551, C552, C553, C554, C555, C556, C557, C558, C559, C560, C561, C562, C563, C564, C565, C566, C567, C568, C569, C570, C571, C572, C573, C574, C575, C576, C577, C578, C579, C580, C581, C582, C583, C584, C585, C586, C587, C588, C589, C590, C591, C592, C593, C594, C595, C596, C597, C598, C599, C600, C601, C602, C603, C604, C605, C606, C607, C608, C609, C610, C611, C612, C613, C614, C615, C616, C617, C618, C619, C620, C621, C622, C623, C624, C625, C626, C627, C628, C629, C630, C631, C632, C633, C634, C635, C636, C637, C638, C639, C640, C641, C642, C643, C644, C645, C646, C647, C648, C649, C650, C651, C652, C653, C654, C655, C656, C657, C658, C659, C660, C661, C662, C663, C664, C665, C666, C667, C668, C669, C670, C671, C672, C673, C674, C675, C676, C677, C678, C679, C680, C681, C682, C683, C684, C685, C686, C687, C688, C689, C690, C691, C692, C693, C694, C695, C696, C697, C698, C699, C700, C701, C702, C703, C704, C705, C706, C707, C708, C709, C710, C711, C712, C713, C714, C715, C716, C717, C718, C719, C720, C721, C722, C723, C724, C725, C726, C727, C728, C729, C730, C731, C732, C733, C734, C735, C736, C737, C738, C739, C740, C741, C742, C743, C744, C745, C746, C747, C748, C749, C750, C751, C752, C753, C754, C755, C756, C757, C758, C759, C760, C761, C762, C763, C764, C765, C766, C767, C768, C769, C770, C771, C772, C773, C774, C775, C776, C777, C778, C779, C780, C781, C782, C783, C784, C785, C786, C787, C788, C789, C790, C791, C792, C793, C794, C795, C796, C797, C798, C799, C800, C801, C802, C803, C804, C805, C806, C807, C808, C809, C810, C811, C812, C813, C814, C815, C816, C817, C818, C819, C820, C821, C822, C823, C824, C825, C826, C827, C828, C829, C830, C831, C832, C833, C834, C835, C836, C837, C838, C839, C840, C841, C842, C843, C844, C845, C846, C847, C848, C849, C850, C851, C852, C853, C854, C855, C856, C857, C858, C859, C860, C861, C862, C863, C864, C865, C866, C867

PD CONTROLLER

3.3V LDO ALL BOARD

The diagram shows a 3.3V LDO regulator circuit. The input is 3.3V. The regulator is an RT9095GSP. The output is 3.3V. The circuit includes capacitors C95, C91, C92, C87, and C89, and resistors R77, R79, and R81.

The circuit diagram shows a 3.3V LDO PCIE 2 voltage regulator. The input is connected to a 3.782V source through a network of capacitors (C102, C99, C100) and a resistor (R89). The regulator chip (U16, RT9095GCS7) has its VIN pin connected to the input, PGOOD pin connected to a pull-up resistor (R84) to a 3V3_PCH2Z supply, VDD pin connected to the output, and EN pin connected to ground via a red X mark. The output is filtered by capacitors C97 and C98 and regulated by resistors R90 and R97. The output voltage is labeled as 3V3.

[illegible]

5V ENABLE

The image shows two identical circuit diagrams for enabling a 5V microcontroller pin. In both, a microcontroller pin (5V_MKE_1_EN or 5V_MKE_2_EN) is connected to the gate of a MOSFET (Q5 or Q6) through a 1k resistor (R102 or R103). The MOSFET's source is grounded, and its drain is connected to a 5V microcontroller pin (5V_MIKROF_1 or 5V_MIKROF_2). A 49k resistor (R100 or R101) is connected between the 5V microcontroller pin and the gate of the MOSFET.

Title		
Size A2	Number	Revision
Date: 5/09/2026	Sheet of	
File: C:\Users\j200_Power_SchDoc	Drawn By:	

