



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ :

G01N 30/02

A1

(11) International Publication Number:

WO 93/13415

(43) International Publication Date:

8 July 1993 (08.07.93)

(21) International Application Number: PCT/US92/10907

(22) International Filing Date: 23 December 1992 (23.12.92)

(30) Priority data:

812,532


23 December 1991 (23.12.91) US

(71)(72) Applicant and Inventor: HIGDON, William, R. [US/
US]; 5173 Independence Drive, Pleasanton, CA 94566
(US).(74) Agents: STEUBER, David, E. et al.; Skjerven, Morrill,
MacPherson, Franklin & Friel, 25 Metro Drive, Suite
700, San Jose, CA 95110 (US).(81) Designated States: AT, AU, BB, BG, BR, CA, CH, CS,
DE, DK, ES, FI, GB, HU, JP, KP, KR, LK, LU, MG,
MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, Eu-
ropean patent (AT, BE, CH, DE, DK, ES, FR, GB, GR,
IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, ML, MR, SN, TD, TG).

Published

With international search report.
With amended claims.

(54) Title: DETACHABLE COLUMN CARTRIDGE FOR GAS CHROMATOGRAPH

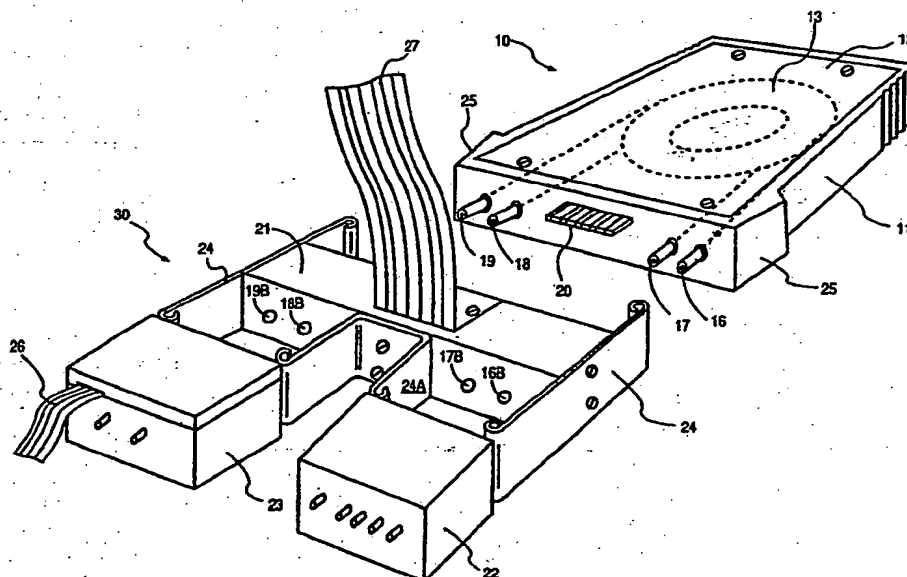

(57) Abstract

A detachable column cartridge (10) for a gas chromatograph is disclosed. The cartridge column (13) contains analytical and reference columns, a heater and a thermocouple, and connects via detachable connectors (16-19) to a base unit (30) containing an injector (22), a detector (23) and other components normally found in gas chromatographs. The cartridge arrangement permits a substitute column to be connected to the base unit (30) easily, in the field, when different gases are to be separated and analyzed.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	MR	Mauritania
AU	Australia	GA	Gabon	MW	Malawi
BB	Barbados	GB	United Kingdom	NL	Netherlands
BE	Belgium	GN	Guinea	NO	Norway
BF	Burkina Faso	GR	Greece	NZ	New Zealand
BG	Bulgaria	HU	Hungary	PL	Poland
BJ	Benin	IE	Ireland	PT	Portugal
BR	Brazil	IT	Italy	RO	Romania
CA	Canada	JP	Japan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SK	Slovak Republic
CI	Côte d'Ivoire	LJ	Liechtenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	SU	Soviet Union
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	MC	Monaco	TG	Togo
DE	Germany	MG	Madagascar	UA	Ukraine
DK	Denmark	ML	Mali	US	United States of America
ES	Spain	MN	Mongolia	VN	Viet Nam
FI	Finland				

- 1 -

Specification

DETACHABLE COLUMN CARTRIDGE FOR GAS CHROMATOGRAPH

Field of the Invention

5 This invention relates to gas chromatographs and in particular to miniature gas chromatographs having a capillary-type column.

Background of the Invention

In recent years, semiconductor technology has created
10 the possibility of a miniature gas chromatograph. Such a device is described in U.S. Patent No. 4,474,889, issued to Terry et al., in which the channels for the carrier gas and sample gas are etched in a semiconductor wafer. The analytical column is external to these elements. U.S.
15 Patent No. 4,471,647, issued to Jerman et al., discloses a miniature gas chromatograph in which all of the channels, including the column, are etched on a semiconductor wafer.

Functionally, a gas chromatograph can be divided into elements which may be used repeatedly, for any tests, and
20 elements which may need to be changed, depending on the gases to be detected. The former group includes the injector and detector and their associated valves and channels. On the other hand, the column may need to be changed in order to permit the gas chromatograph to
25 analyze a different gas or group of gases.

The miniaturization of gas chromatographs has led to the use of miniaturized capillary columns having internal diameters generally in the range of 100-500 microns. Exchanging a column having these dimensions is no trivial
30 task, and one that normally cannot be performed in the field. Frequently, the chromatograph must be returned to the manufacturer, who severs the connections to the analytical and reference lines at the injector and detector, replaces the column, and then reconnects the
35 column to the injector and the detector. Aligning the

- 2 -

tubes on either side of the connection is a delicate operation, and connectors containing ferrules are often used for this purpose. A mismatch or the introduction of a "dead volume" in the connector can create eddy currents and spatial voids which enhance Brownian diffusion, ultimately interfering with the accuracy of the analysis. This process can be time consuming and obviously requires the chromatograph to be removed from service. It also involves some expense and training.

10 Summary of the Invention

A gas chromatograph in accordance with this invention includes two units: a base unit which contains injector and detector assemblies, manual controls and a visual display; and a column cartridge which contains capillary-
15 type analytical and reference lines, a heater and a thermocouple. Connections between the column cartridge and the base unit are made with precisely machined connectors which are capable of providing a substantially perfect mating between the capillary tubes on either side
20 of the connector, thereby providing a smooth flow of gases from the injector through the analytical and reference lines to the detector. An electrical connector provides connections for the heater and thermocouple. The cartridge is a completely self-contained unit which can
25 simply be plugged into the base unit. The cartridges are interchangeable and can be replaced easily in the field, thereby eliminating the inconvenience and expense of returning the device to the manufacturer.

Description of the Drawings

30 Figure 1 is an isometric view of a column cartridge and a portion of a base unit in accordance with the invention.

Figures 2A and 2B are top and side views, respectively of the column cartridge and base unit
35 elements shown in Figure 1.

- 3 -

Figure 3 is a detailed cross-sectional view of a column connector in accordance with the invention.

Figure 4A, 4B and 4C are additional views of the column connector and associated components shown in Figure 5 3.

Figure 5 is an illustration of an alternative embodiment in accordance with the invention.

Description of the Invention

Figure 1 shows an isometric view of a column 10 cartridge 10. The exterior of column cartridge 10 is formed by a housing 11 and a cover plate 12. A column 13 is placed inside housing 11 and positioned between insulation layers 14 (see Figure 2B). Adjacent column 13 is a heater 15, which can more easily be viewed in Figure 15 2A. The analytical and reference lines of column 13 terminate in male connectors 16 and 17, respectively, for connecting to an injector, and in male connectors 18 and 19, respectively, for connecting to a detector. A male connector 20 is provided for making the necessary 20 electrical connections to heater 15 and a thermocouple (not shown), which is wound separately but adjacent to heater 15.

Also shown in Figure 1 are a manifold block 21, a gas injector 22 and a solid state detector 23. Manifold block 25 21, injector 22 and detector 23 are components of a base unit 30 of a gas chromatograph, which contains manual controls, a visual display, and the other elements common to gas chromatographs (not shown). As indicated in Figure 1, injector 22 and detector 23 are shown in an exploded 30 view with respect to manifold block 21. In reality, injector 22 and detector 23 are connected with manifold block 21 in the manner described below.

Attached on either side of manifold block 21 are spring-loaded latch clips 24, the forward ends of which 35 are formed so as to mate with detents 25 projecting from the sides of housing 11. Latch clips 24 are made of a

- 4 -

spring metal so that cartridge 10 is securely fastened to base unit 30 when clips 24 are engaged with detents 25. The rear ends of latch clips 24 cooperate with a spring-loaded clip 24A to hold injector 22 and detector 23 against manifold block 21.

A ribbon-type electrical conductor 26 enters detector 23 from a printed circuit controller board (not shown). A second ribbon-type electrical connector 27 also extends from the printed circuit controller board and connects through manifold block 21 to connector 20. As shown in Figure 2A, male connector 20 plugs into a female connector 20B in manifold block 21.

Manifold block 21 also contains holes 16B, 17B, 18B and 19B, which extend through the entire width of manifold block 21. Holes 16B-19B are spaced so as to coincide with connectors 16-19, and the diameter of holes 16B-19B is sized so as to allow a snug fit with connectors 16-19. Connectors 16A and 17A on injector 22 and connectors 18A and 19A on detector 23 are likewise spaced and sized so that they may be fitted into the opposite ends of holes 16B-19B.

Connectors 16-19 and 16A-19A are identical with each other. Connectors 16-19 are mounted in cavities 28 of housing 11, and connectors 16A-19A are mounted in similar cavities (not shown) in injector 22 and detector 23.

Figures 3 and 4A-4C show in detail how connectors 16-19 and 16A-19A are mounted, using connectors 16 and 16A as an illustration. As noted above, connector 16 is positioned in cavity 28 of housing 11. Similarly, connector 16A is positioned in a cavity 28A in a housing 22A of injector 22.

Since connectors 16 and 16A are identical, only connector 16 will be described in detail. The innermost part of connector 16 consists of a metal insert 50, which is surrounded by a polycarbonate sleeve 51. Sleeve 51 has a notch formed in its exterior circumference into which an C-ring clip 52 is snapped. A compression spring 53

- 5 -

surrounds sleeve 51 and engages a shoulder 54 of sleeve 51, forcing a spring housing 55 against C-ring clip 52. Cavity 28 is formed such that spring housing 55 is held firmly in place, while sleeve 51 and C-ring clip 52 are free to move a short distance to the right, as shown in Figure 3.

One end of connector 16 projects from cartridge 10 (see Figure 1) and is inserted into hole 16B in manifold block 21. A conical tapered surface 29 at the outside edge of hole 16B helps to guide connector 16 into hole 16B.

At the end of connector 16 which is inserted into hole 16B, metal insert 50 projects slightly beyond sleeve 51. An elastomeric gasket 56 is fitted over the projecting end of metal insert 50. (The structure of gasket 56 is shown in Figures 3 and 4C.) A hole is formed along the axis of metal insert 50, and this hole lines up perfectly with a hole formed in gasket 56 when gasket 56 is fitted over the end of metal insert 50. A polyimide-coated capillary column 57 is inserted into the hole in metal insert 50 until column 57 reaches the end of metal insert 50. Connector 16 is then heated to the melting point of the polyimide, causing the polyimide coating to bond column 57 to metal insert 50. A column 60 is similarly fitted into connector 16A.

As noted above, the structure of connector 16A is identical to that of connector 16. Because injector 22 is attached to manifold block 21, connector 16A is permanently fitted into hole 16B. Connectors 16 and 16A are positioned so that spring 53 and its counterpart spring 53A in connector 16A are compressed slightly when clips 24 engage detents 25, pressing housing 11 against manifold block 21. Accordingly, gasket 56 and its counterpart gasket 56A in connector 16A are compressed against each other forming a seal against the leakage of gas at the point where connectors 16 and 16A make contact.

In manufacturing this structure, it is very important

- 6 -

that the axial holes in connectors 16 and 16A be machined accurately so that they are positioned at the axis of each connector. Similarly, the holes in gaskets 56 and 56A must be formed at the precise center of each gasket and must line up perfectly with the holes in connectors 16 and 16A. The holes in connectors 16 and 16A must allow a capillary column (such as column 57) to slide within them while firmly gripping the end of the column when it has been fully inserted. It has been found that this process is facilitated by tapering the holes slightly to a slightly smaller diameter at the end adjacent the elastomeric gasket. This ensures that the ends of columns 57 and 60 will be accurately aligned when cartridge 10 is attached to base unit 30.

Connectors suitable for use in this device are available from Valdor, Inc. of San Jose, California.

The structure of connectors 17-19 and 17A-19A is identical to that of connectors 16 and 16A. In a similar manner, they are fitted into holes 17B-19B in such a way that columns inserted into connectors 17-19 are lined up accurately with columns inserted into connectors 17A-19A.

An alternative structure for the connectors is illustrated in Figure 5. In this embodiment, connector 16A is omitted, and a cylindrical cavity 61 is formed in a manifold block 65. The outside diameter of sleeve 51 is just slightly smaller than the inside diameter of cavity 61. A hole 62 for connector 60 is bored in manifold block 65, so that the axis of hole 62 and cavity 61 line up perfectly. When connector 16 is inserted into cavity 61, columns 57 and 60 line up perfectly, and gasket 56 is compressed against the rear wall of cavity 61, thereby creating a tight seal.

The foregoing embodiments are intended to be illustrative and not limiting. Numerous other embodiments will be apparent to those skilled in the art. For example, the principles of the invention are applicable to gas chromatographs which do not contain a Wheatstone

- 7 -

Bridge type detector and therefore have no need for a reference column. All such alternative embodiments are included within the broad principles of the invention, as defined in the following claims.

Claims

I claim:

1. A column cartridge for detachably connecting to
a base unit of a gas chromatograph, said base unit
5 comprising a gas injector and a detector, said column
cartridge comprising:
a housing;
an analytical column having an inlet end for
receiving a gas from said gas injector and an outlet
10 end for delivering the gas to said detector;
inlet connector means attached to the inlet end
of said column;
outlet connector means attached to the outlet
end of said column;
15 said inlet and outlet connector means being
designed so as to detachably connect to said base
unit for providing gas flow from the injector in said
base unit, through said column, and to the detector
in said base unit.
- 20 2. The column cartridge of Claim 1 comprising a
heater and a thermocouple connected to an electrical
connector, said electrical connector being designed to
mate with a corresponding electrical connector in said
base unit so as to provide electrical power to said
25 heater.
3. The column cartridge of Claim 1 wherein said
analytical column is a capillary-type column.
4. The column cartridge of Claim 1 comprising a
means of attaching said column cartridge to said base
30 unit.
5. The column cartridge of Claim 1 wherein said
means of attaching comprises a detent member designed to
mate with a spring means on said base unit.

- 9 -

6. The column cartridge of Claim 1 wherein each of said inlet connector means and said outlet connector means comprises an insert member, said insert member having a hole formed in it into which said column is inserted.

5 7. The column cartridge of Claim 6 wherein each of said connector means comprises a gasket means and a spring member, said spring member being designed to force said gasket against said base unit when said cartridge is connected to said base unit, so as to prevent the leakage
10 of gas.

8. The column cartridge of Claim 7 wherein said gasket comprises an elastomeric material.

9. The column cartridge of Claim 8 wherein said insert comprises a metal.

15 10. The column cartridge of Claim 9 wherein the hole in said insert member is tapered.

11. The column cartridge of Claim 1 comprising a reference column, having inlet and outlet ends, inlet connector means and outlet connector means attached to the
20 inlet and outlet ends, respectively, of said reference column, said inlet and outlet connector means being designed so as to detachably connect to said base unit for providing gas flow from the injector in said base unit, through said reference column, and to the detector in said
25 base unit.

AMENDED CLAIMS

[received by the International Bureau on 22 March 1993 (22.03.93);
original claims 1-11 cancelled; new claims 12-35 added (6 pages)]

12. A gas chromatograph including a detachable column cartridge, said gas chromatograph comprising:
- 5 a base unit, said base unit comprising:
- an injector and a detector; and
- a first cavity and a second cavity, said first and second cavities opening to a face of said base unit, a first capillary tube extending
- 10 between said first cavity and said injector and a second capillary tube extending between said second cavity and said detector, each of said first and second cavities having a rear wall and a guiding surface, said first capillary tube
- 15 terminating at the rear wall of said first cavity and said second capillary tube terminating at the rear wall of said second cavity;
- a detachable column cartridge, said column
- 20 cartridge comprising:
- a housing;
- a capillary flow channel, said capillary flow channel comprising a capillary column disposed in said housing, said capillary flow
- 25 channel having a first end which terminates at an end surface of a first male connector and a second end which terminates at an end surface of a second male connector, said first and second male connectors projecting from the cartridge,
- 30 each of said first and second male connectors having an external surface which is sized and shaped so as to provide a sliding fit with the guiding surface of a corresponding one of said first and second cavities;
- 35 means for attaching said base unit and said column cartridge, said means allowing said column cartridge to be detached from said base unit;

- 11 -

each of said first and second male connectors projecting into a corresponding one of said first and second cavities when said base unit and said column cartridge are attached, said first capillary tube lining up with the first end of said capillary flow channel and said second capillary tube lining up with the second end of said capillary flow channel; and biasing means for maintaining a pressure between the end surfaces of each of said first and second male connectors and the rear walls of said first and second cavities, respectively, when said base unit and said column cartridge are attached, the pressure being sufficient to prevent leakage of a gas flowing through said capillary flow channel and said first and second capillary tubes.

13. The gas chromatograph of Claim 12 wherein said means for attaching comprises a spring-loaded element.

14. The gas chromatograph of Claim 12 wherein said guiding surface comprises a tapered surface for guiding one of said first and second male connectors, respectively, into said cavity.

15. The gas chromatograph of Claim 12 wherein each of said male connectors comprises a gasket which forms the end surface of said male connector.

16. The gas chromatograph of Claim 15 wherein each of said gaskets comprises an elastomeric material.

17. The gas chromatograph of Claim 12 wherein each of said male connectors comprises a portion of said capillary column fitted inside a metal insert.

18. The gas chromatograph of Claim 17 wherein the outer surface of the capillary column inside said metal

- 12 -

insert is coated with polyimide.

19. The gas chromatograph of Claim 12 wherein said biasing means comprises a compression spring.

20. The gas chromatograph of Claim 12 wherein each 5 of said guiding surfaces and said external surfaces is cylindrical.

21. The gas chromatograph of Claim 12 wherein said column further comprises an analytical column and wherein said column cartridge comprises a reference column.

10 22. The gas chromatograph of Claim 21 wherein said column cartridge comprises a heater element, said heater element being positioned adjacent said analytical and reference columns.

23. A gas chromatograph including a detachable
15 column cartridge, said gas chromatograph comprising:
a base unit, said base unit comprising:
an injector and a detector;
a manifold block comprising first and
20 second holes, said holes extending through said manifold block from a first face to a second face;
a first male connector having an end surface and being in flow communication via a first capillary tube with said injector, said
25 first capillary tube terminating at said end surface of said first male connector;
a second male connector having an end surface and being in flow communication via a second capillary tube with said detector, said
30 second capillary tube terminating at said end surface of said second male connector;
said first male connector projecting into

- 13 -

said first hole and said second male connector projecting into said second hole;

a detachable column cartridge, said column cartridge comprising:

5 a housing;

a capillary flow channel, said capillary flow channel comprising a capillary column disposed in said housing, said capillary flow channel having first and second ends which
10 terminate at respective end surfaces of a third male connector and a fourth male connector, respectively, said third male connector and said fourth male connector projecting from the cartridge, each of said third and fourth male
15 connectors having an external surface which is sized and shaped so as to provide a sliding fit with one of said first and second holes, respectively;

means for attaching said base unit and said
20 column cartridge, said means allowing said column cartridge to be detached from said base unit;

said third male connector projecting into said first hole and said fourth male connector projecting into said second hole when said base unit and said
25 column cartridge are attached, said first capillary tube lining up with the first end of said capillary flow channel and said second capillary tube lining up with the second end of said capillary flow channel when said base unit and said column cartridge are
30 attached; and

biasing means for maintaining a pressure between the end surfaces of said first and third male connectors, and between the end surfaces of said second and fourth male connectors, when said base
35 unit is attached to said column cartridge, the pressure being sufficient to prevent leakage of a gas flowing through said capillary flow channel and said

first and second capillary tubes.

24. The gas chromatograph of Claim 23 wherein said means for attaching said base unit to said column cartridge comprises a spring-loaded element.

5 25. The gas chromatograph of Claim 23 wherein said first hole comprises a tapered surface for guiding said third male connector into said first hole and said second hole comprises a tapered surface for guiding said fourth male connector into said second hole.

10 26. The gas chromatograph of Claim 23 wherein each of said third and fourth male connectors comprises a gasket which forms the end surface thereof.

27. The gas chromatograph of Claim 26 wherein each of said gaskets comprises an elastomeric material.

15 28. The gas chromatograph of Claim 23 wherein each of said first and second male connectors comprises a gasket which forms the end surface thereof.

29. The gas chromatograph of Claim 28 wherein each of said gaskets comprises an elastomeric material.

20 30. The gas chromatograph of Claim 23 wherein each of said third and fourth male connectors comprises a portion of said capillary column fitted inside a metal insert.

31. The gas chromatograph of Claim 30 wherein the
25 outer surface of the capillary column inside said metal insert is coated with polyimide.

32. The gas chromatograph of Claim 23 wherein said biasing means comprises a compression spring.


33. The gas chromatograph of Claim 23 wherein each of said holes and said external surfaces is cylindrical.

34. The gas chromatograph of Claim 23 wherein said column further comprises an analytical column and wherein 5 said column cartridge comprises a reference column.

35. The gas chromatograph of Claim 34 wherein said column cartridge comprises a heater element, said heater element being positioned adjacent said analytical and reference columns.

1/5

Fig. 1

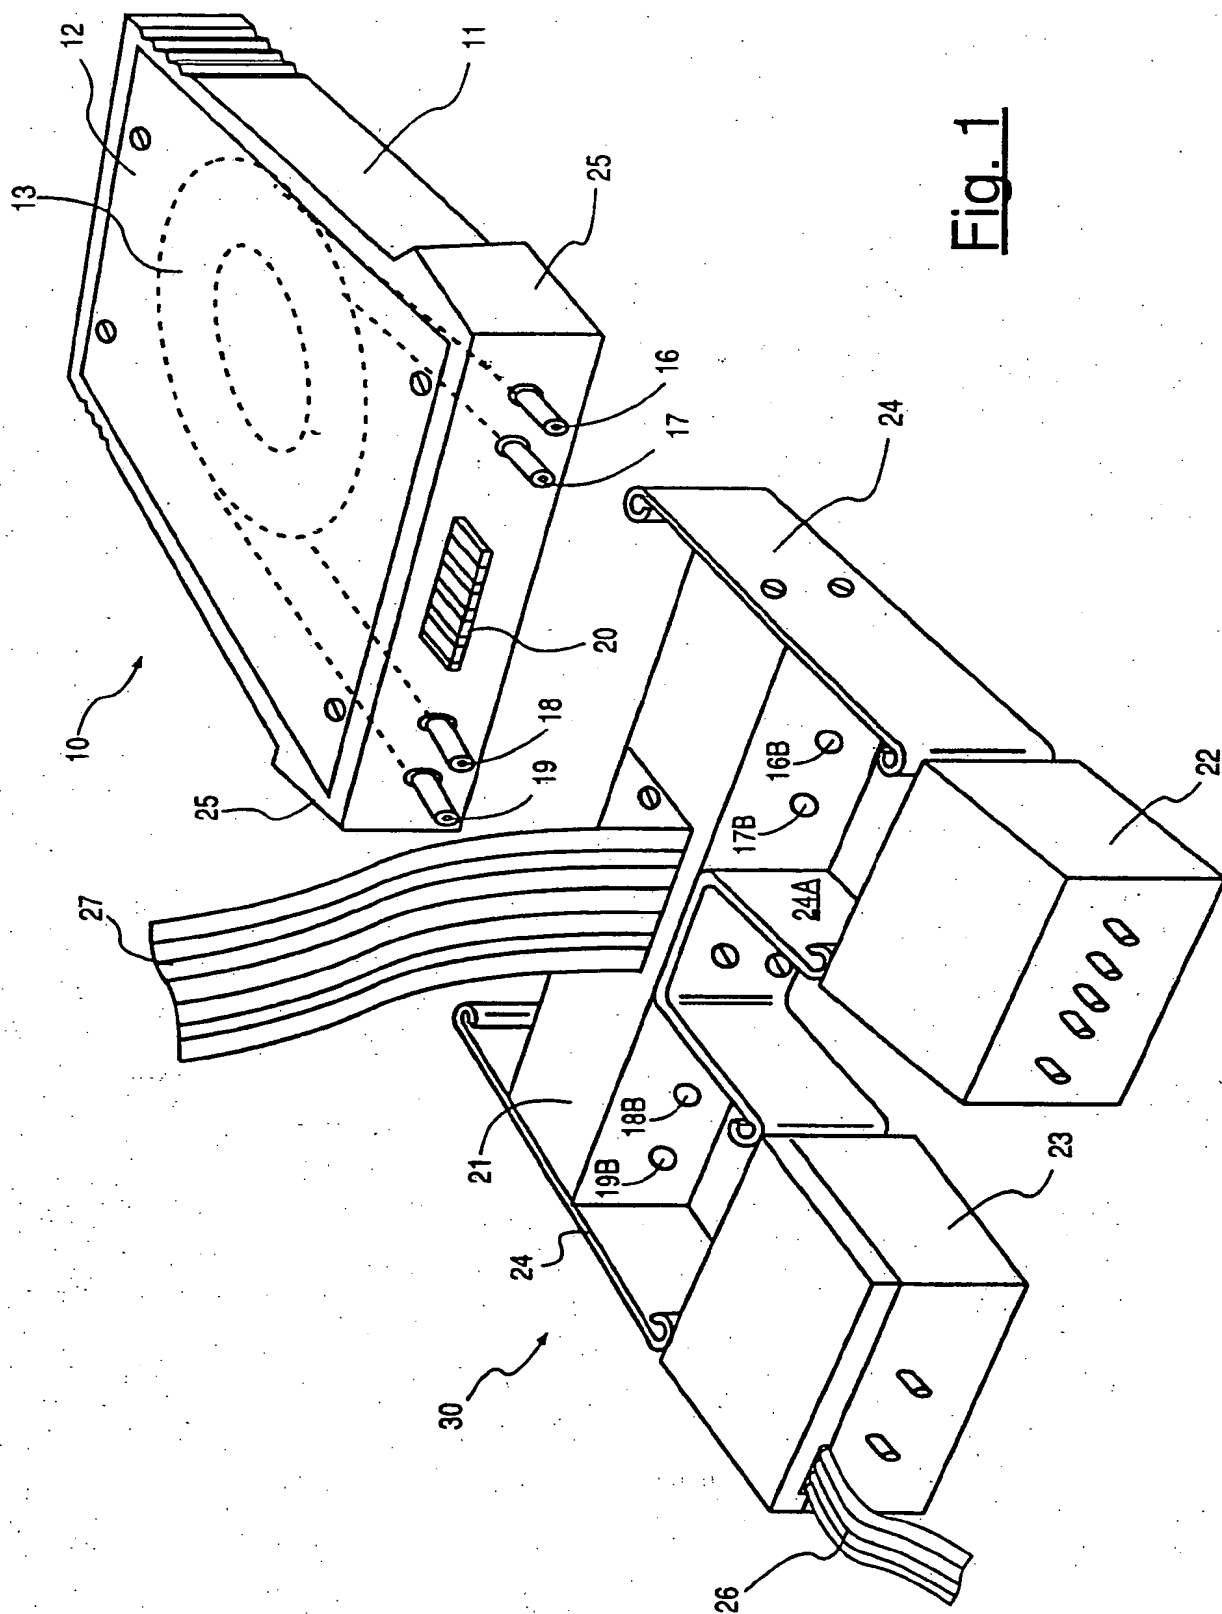

2/5

Fig. 2A

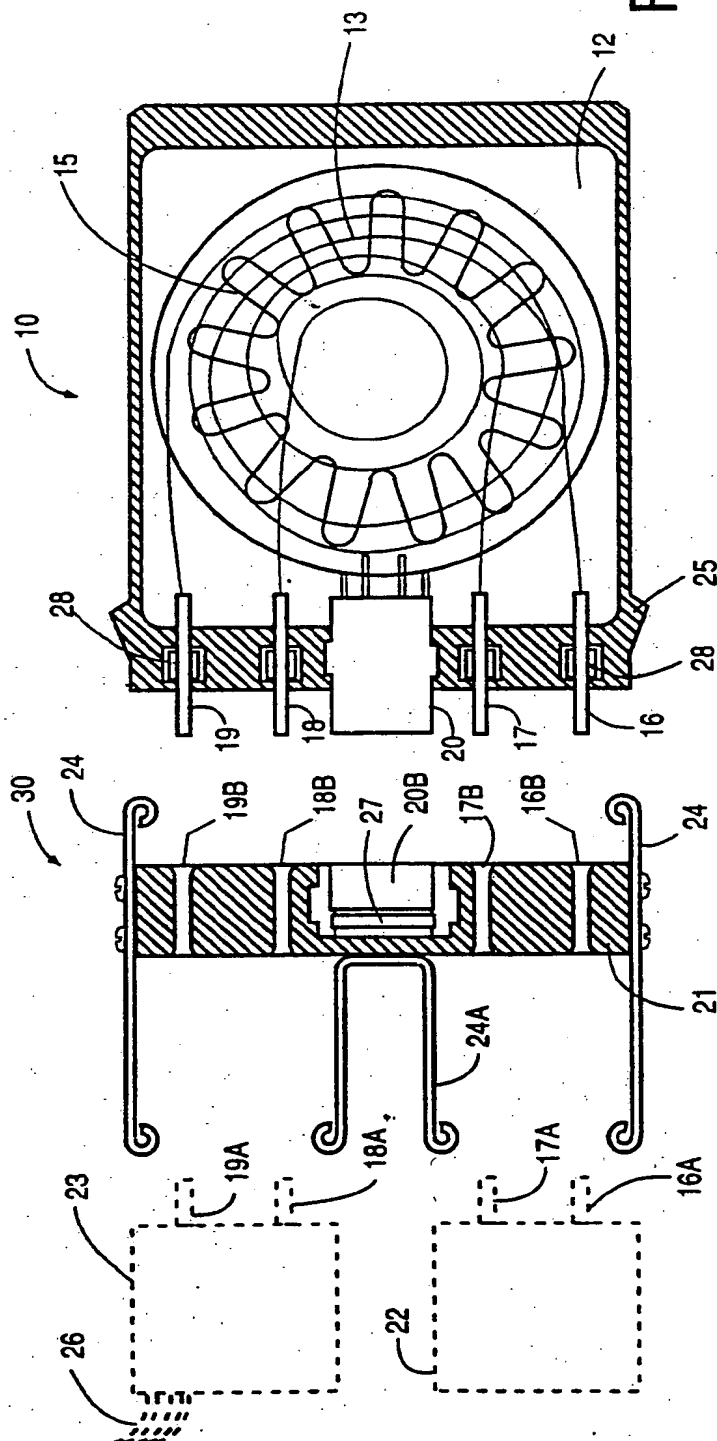
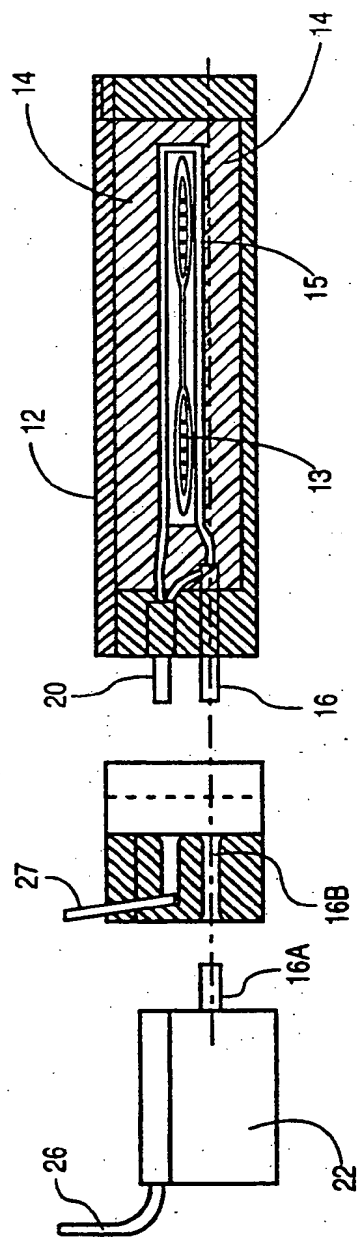


Fig. 2B



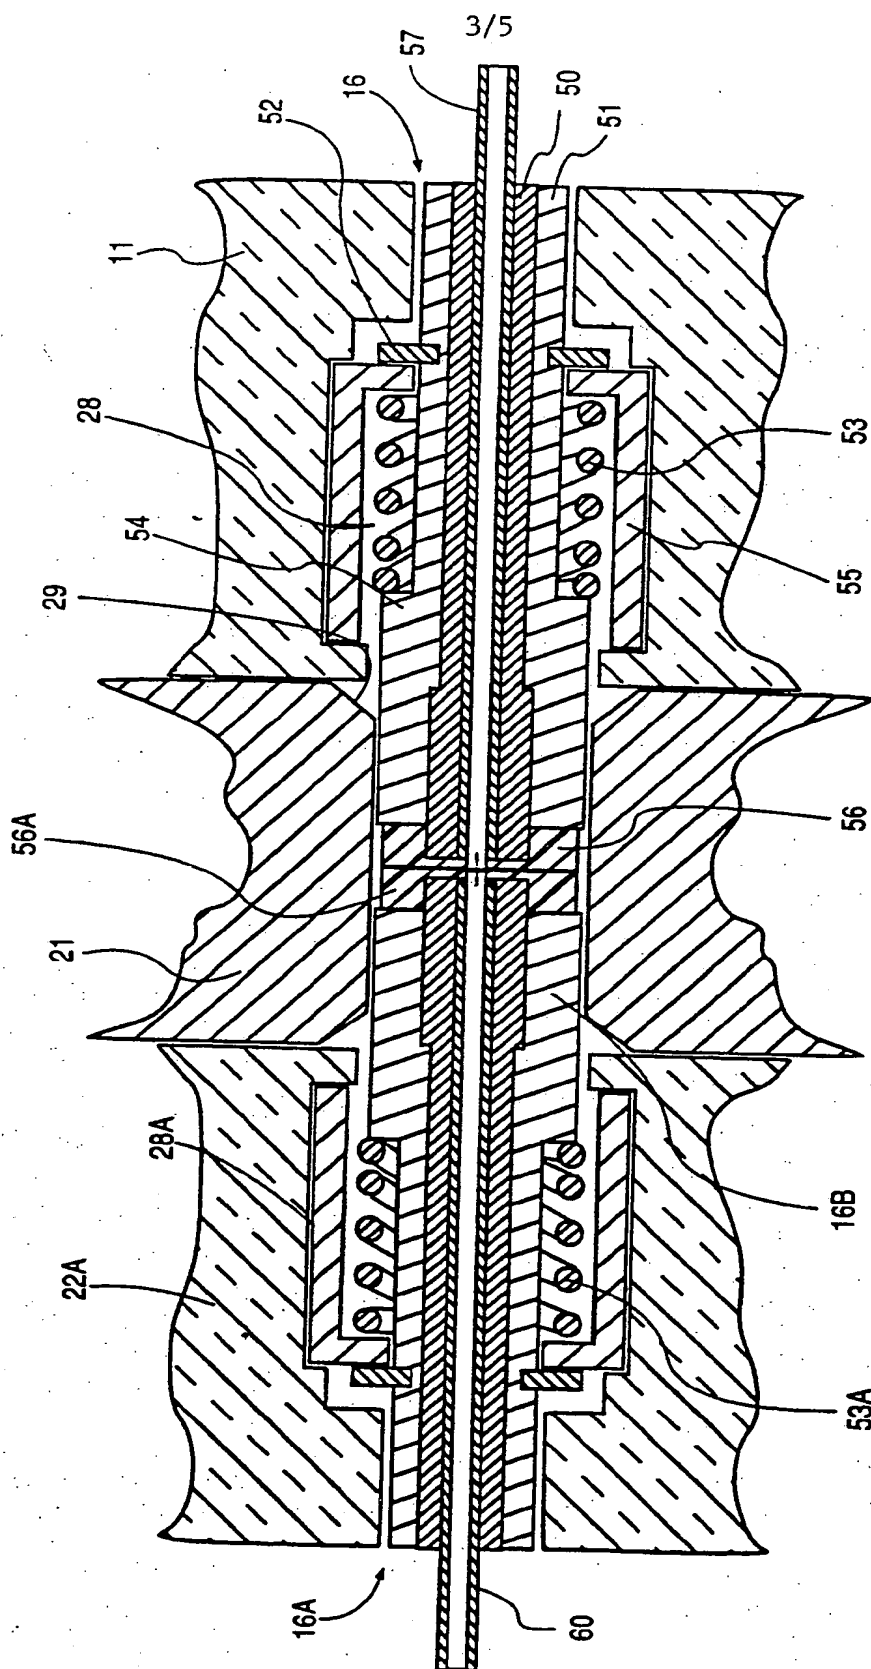


Fig.3

Fig. 4A




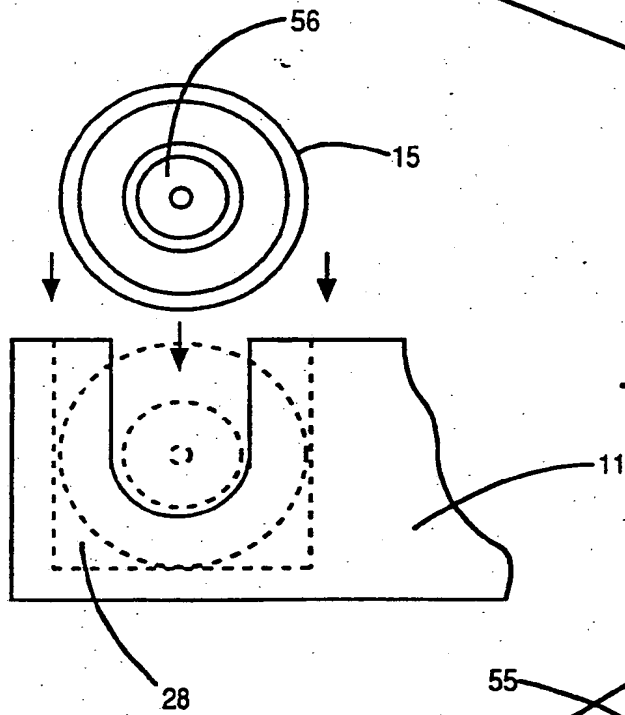


Fig. 4B

Fig. 4C

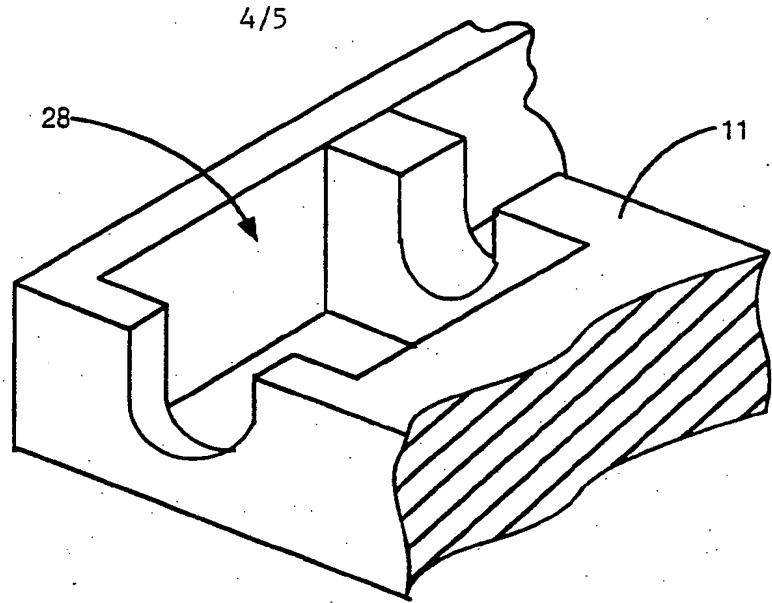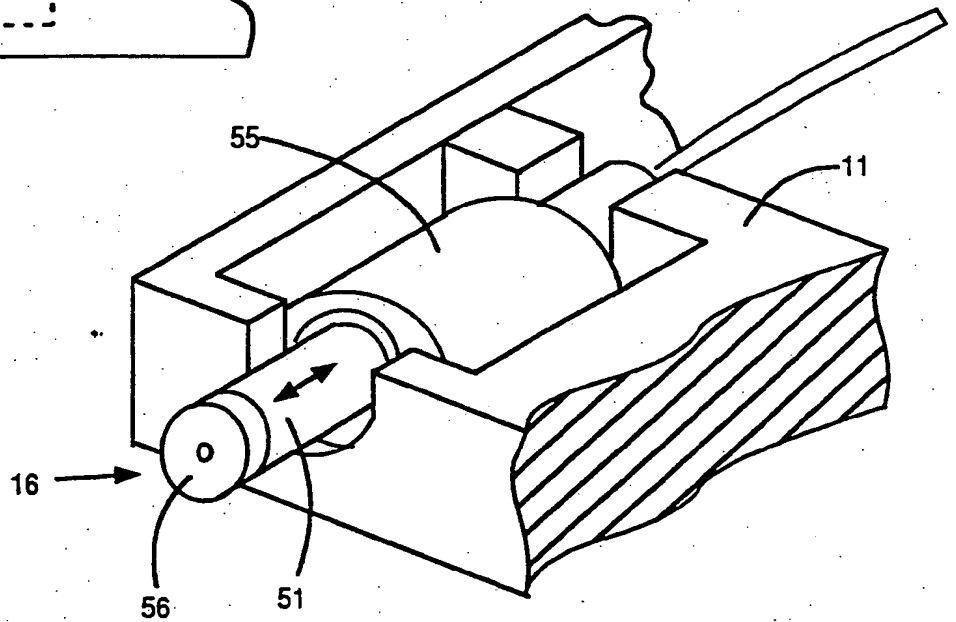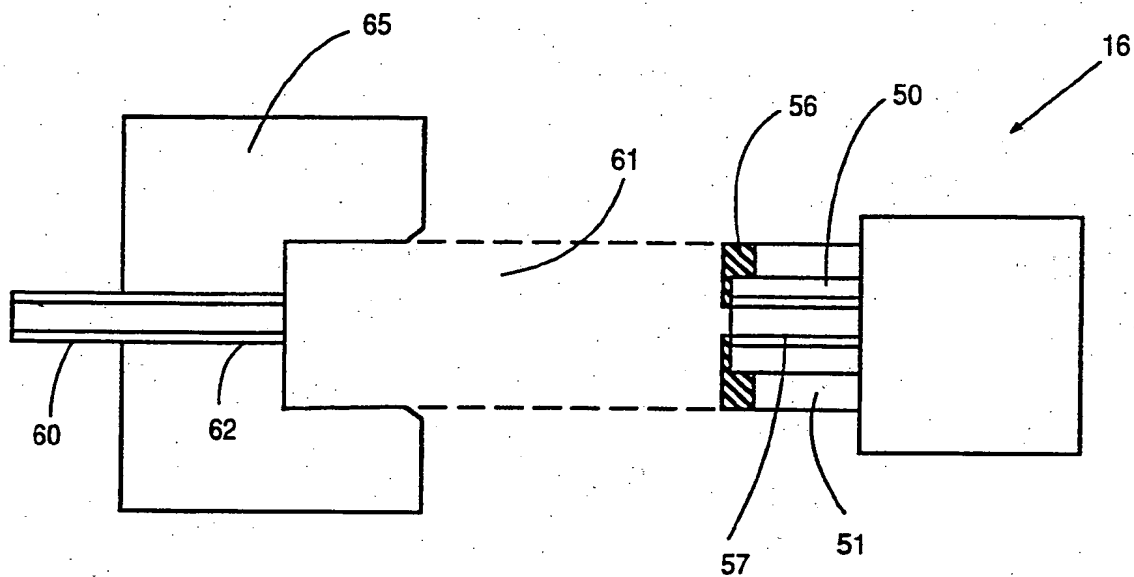

5/5

Fig. 5

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US92/10907

A. CLASSIFICATION OF SUBJECT MATTER

IPC(5) : G01N 30/02

US CL : 422/70, 89; 73/23.39, 61.53; 210/198.2; 55/386

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 422/70, 89; 436/161; 73/23.35, 23.39, 61.52, 61.53; 210/198.2, 656; 55/67, 386

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	US, A, 3,213,596 (Gill) 26 October 1965, Figure 3.	1,4 2-3, 5-11
Y	US, A, 4,451,365 (Sattler et al.) 29 May 1984, Figure 6.	7-10
Y	US, A, 4,669,756 (Cassaday et al.) 2 June 1987, Figure 2.	7-10

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be part of particular relevance

E earlier document published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

&

document member of the same patent family

Date of the actual completion of the international search

28 January 1993

Date of mailing of the international search report

17 FEB 1993

Name and mailing address of the ISA/
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. NOT APPLICABLE

Authorized officer

JAN M. LUDLOW

Telephone No. (703) 308-4039

Form PCT/ISA/210 (second sheet)(July 1992)*