




J1
4x 21700 pack (4S)




J2
Foldable solar panel




J3
Hand crank generator




J4
Sealed USB-C port




J5
MPPT / charger

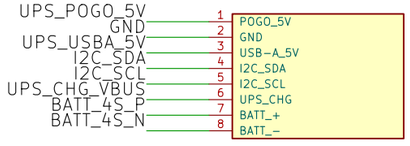


J6
Waveshare UPS HAT (E)

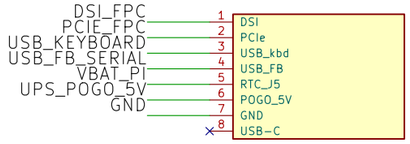

J7
Raspberry Pi 5




J8
DFR0550-V2 5 inch DSI




J9
Seeed M.2 BASE + 1TB




J10
Phistone 2.4G dongle




J11
Panasonic ML-2020

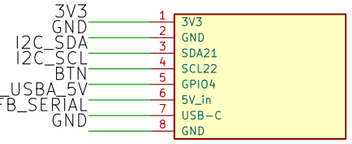


J12
FireBeetle 2 ESP32-UE




J13
1.3 inch OLED 0x3C




J14
BME688 0x76/0x77



J15
DS3231 RTC 0x68



J16
Trackball 0x0A (r2 only)



J17
PBS-33B status button

Same net label = connected. This is a net-label schematic, not a routed harness.

I2C: FireBeetle is the only master (3.3 V). Fit one set of 4.7 kOhm pull-ups only.

CHG_VBUS: solar and crank share the one sealed port. BATT_4S: 4x21700 series, fuse positive.

USB_FB_SERIAL: FireBeetle USB-C to Pi USB-A, data-only preferred. Trackball is r2-only; r3 uses none.

R3 keyboard: the case holds only the Phistone 2.4G dongle (J10) in a Pi USB-A port. Bluetooth option: no dongle, no wire.

Pi Fluks

Sheet: /
File: pi_flux_r3_wiring.kicad_sch

Title: Pi Fluks r3 — wiring / connections

Size: A3	Date: 2026-10-20	**Rev: 2**
KiCad E.D.A. 10.0.7		Id: 1/1