



Universal IDU - Wall Mounted

Job Name: Location: Date:
Engineer: Submitted to: Submitted by:
Approval: Construction: Unit #:
Reference: Drawing #:

Key Features:


- * **Quick and easy installation** with mounting bracket and detachable IDU base plate.
- * **Integrated Wi-Fi plus the ConnectLife smart app**, put easy operation right at your fingertips.
- * **Build in A2L Safety Sensor** - Ensures safety for both homeowners and technicians.
- * **4-Way Air Flow** for optimized comfort.
- * Easily accessible and washable **High Definition Filter** for improved air quality and maintenance.
- * Self-cleaning indoor with **Hisense FrostClean™ technology** to reduces dust and bacteria for a healthier home
- * Whisper-Quiet Operation with noise level as low as 28dB.
- * **Display Dimmer** turns off the both displays to eliminate lighting at night
- * **Child-Safe Finger Guards** to protect small hands from indoor fan.




SPECIFICATIONS

Model Name			ASU-07U3THB25U ASU-07U3THB25U-B	ASU-09U3THB25U ASU-09U3THB25U-B	ASU-12U3THB25U ASU-12U3THB25U-B	ASU-15U3THB25U ASU-15U3THB25U-B	ASU-18U3THB25U ASU-18U3THB25U-B	ASU-24U3THB25U
Capacity	Cooling capacity	Btu/h	7000	9000	12000	15000	18000	24000
	Heating capacity	Btu/h	7000	9000	12000	15000	18000	24000
Electrical Data	Power	V/Hz/f	208/230 60 1	208/230 60 1	208/230 60 1	208/230 60 1	208/230 60 1	208/230 60 1
	Rated current	A	3.0	3	4.2	6.5	6.5	9.3
	Anti electric shock	/	Class I	Class I	Class I	Class I	Class I	Class I
	Degrees of protection	/	IPX0	IPX0	IPX0	IPX0	IPX0	IPX0
Fan Motor	Model	/	KD09060426	KD09060426	KD09060426	KD09060452	KD09060452	KD09060452
	Type/Qty	/	DC/1	DC/1	DC/1	1	1	1
	Output	HP	1/28	1/28	1/28	1/16	1/16	1/21
	Speed(S/H/M/L)-cooling	r/min	1250/1100/850/750	1250/1100/850/750	1250/1100/850/750	1180/1100/952/800	1180/1100/952/800	1180/1100/950/850
Air flow		CFM	383/365/306/253/224	383/365/306/253/224	394/365/312/253/235	647/589/483/383/353	647/589/483/383/353	706/647/500/441/412
Noise Level (Sound Pressure)		dB(A)	42/39/32/30/28	42/39/32/30/28	46/39.5/32.5/30/28	48/45/41/36/33	48/45/41/36/33	50/48/43/41/39
Dimension	Net Dimension (WxHxD)	inch	33-7/16×11-9/16×8-1/16	33-7/16×11-9/16×8-1/16	33-7/16×11-9/16×8-1/16	42-1/16×12-5/8×9-1/16	42-1/16×12-5/8×9-1/16	42-1/16×12-5/8×9-1/16
	Package dimension (WxHxD)	inch	35 13/16 ×14 3/16 ×10 7/16	35 13/16 ×14 3/16 ×10 7/16	35 13/16 ×14 3/16 ×10 7/16	45 1/2 ×15 3/8 ×12 3/16	45 1/2 ×15 3/8 ×12 3/16	45 1/2 ×15 3/8 ×12 3/16
Weight	Net Weight	lbs	20.9	20.9	20.9	28.7	28.7	28.7
	Gross Weight	lbs	25.4	25.4	25.4	34.2	34.2	34.2
Pipe Size	Diameter(Liquid)	inch	1/4	1/4	1/4	1/4	1/4	3/8
	Diameter(Gas)	inch	3/8	3/8	3/8	1/2	1/2	5/8
Loading capacity		20"/40"/40HQ	345/715/830	345/715/830	345/715/830	226/456/518	226/456/518	226/456/518

7/9/12K

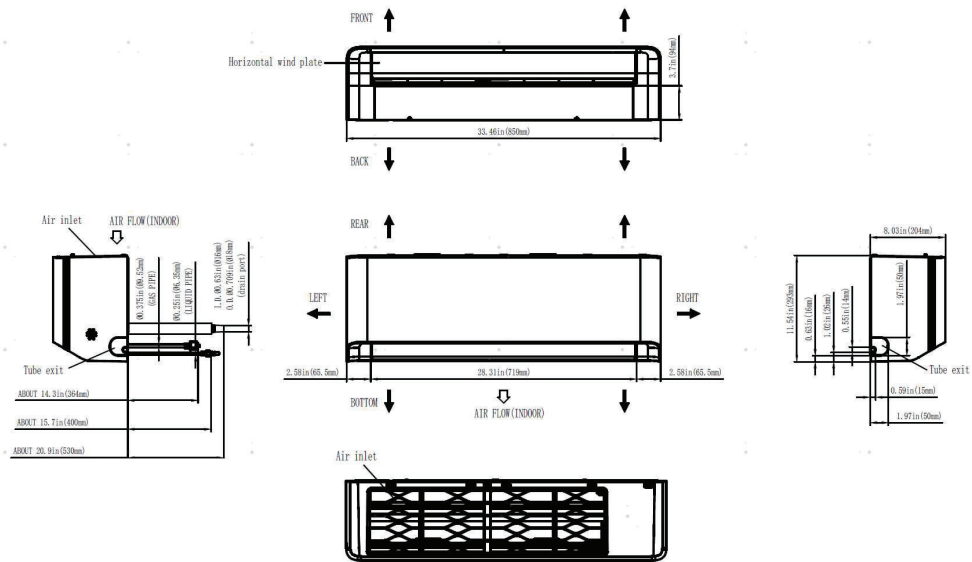


15/18/24K

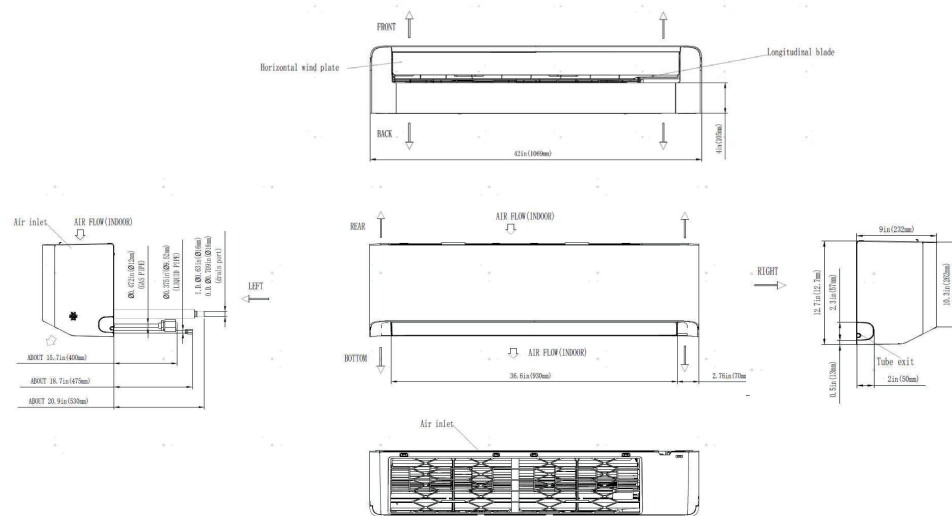

Accessories

Controller		
RCH-RTY5-0	Remote Controller	standard
HS-WC01U	Wired Controller (built-in infrared signal receiver)	optional
HS-WC02U	Wired Controller	optional
HS-WC01T	Central controller (Hisense IDU only)	optional

REMOTE CONTROLLER

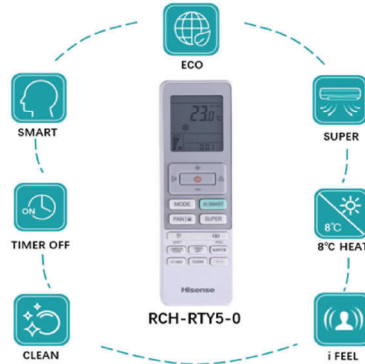

Button Description

	Press this button to select the operation mode
	Used to adjust the set temperature and the timer, also real time
	Used to adjust vertical adjustment louver swinging and set the desired up/down airflow direction
	Used to adjust the swing of the horizontal louver and set the left/right airflow direction
	Used to start or stop the fast cooling/heating (Fast cooling operates at high fan speed with 60°F (16°C) set temp automatically. Fast heating operates at auto fan speed with 80°F (30°C) set temp automatically)
	Used to select fan speed in sequence: auto, higher, high, medium, low, lower. Press this button for 5 seconds to activate LOCK mode; press it again for 5 seconds to deactivate the mode.
	Used to set or cancel i FEEL Mode. In i FEEL mode the Air Conditioner operates basis temperature sensor fitted in remote instead of machine. Advice to use i FEEL mode end the remote put where the indoor unit receives signal easily
	Used to set the Clean operation
	Used to start Smart Running Mode. Smart Mode automatically selects the appropriate operating mode—Cooling, Dry, Fan Only, or Heating



Large **LCD Display** for EZ read and control



24h Real Timer and **Weekly Timer** setting



Eliminate the feeling of being cold
Reduce power consumption

HS-WC01U
HS-WC02U



❖ **Signal receiver** of Remote Control – **only HS-WC01U**

❖ **Central Controller** for Max. 16 units - **only HS-WC01T**

Button Description

1. ON/OFF BUTTON

The appliance will be started or stopped when this button is pressed.

2. RUN INDICATOR

Indicates that the appliance is on.

3. MODE BUTTON

Press this button to select the operation mode.

4. FAN BUTTON

Used to select fan speed in sequence high-auto-low-medium-high.

5. SWING BUTTON

Used to stop or start the adjustment louver swinging and set the desired airflow direction.

6. TIMER/CLOCK BUTTON

Used to set the current time or set timer on/off.

7. SLEEP BUTTON

Used to set or cancel Sleep Mode operation.

8. ENTER BUTTON

Used to confirm settings.

9. CANCEL BUTTON

Used to cancel settings.

10. ADD. FUNC. BUTTON

Used to set filter clean, hot water, fresh air, electric heater, etc.

11. INCREASE SETTING BUTTON

Used to raise the set temperature;

It raise the values when setting.

12. DECREASE SETTING BUTTON

Used to lower the set temperature;

It lower the values when setting.

13. LIQUID CRYSTAL DISPLAY(LCD) SCREEN

Used to display indicator screens.

14. BUILT-IN INFRARED SIGNAL RECEIVER

Used to receive infrared signal.