



## Submittal Data Sheet

Daikin OTERRA 115V 0.75-Ton Wall Mount Heat Pump System  
FTXQ09ASBU9RXQ09ASBU9

### FEATURES

- Flare less joint
- 15A Circuit Breaker
- Removable Drain Pan
- Daikin Swing compressor with Inverter
- Indoor Unit Quiet Operation
- Auto Defrost, Auto Fan Speed and Suto Restart (after power failure)
- Program Dry function
- Wide Angle Louvers and Vertical Auto Swing
- Energy Saving Function
- Sleep Mode

### BENEFITS

- Easier, Faster and more reliable installtion with Flareless joint
- 15A circuit breaker only needs one space in Electrical Panel.
- Precharged for up to 50'
- 12 year Warranty
- R-32 is Easy, Proven, Efficient and Available
- Simple maintenance
- Reduced power consumption
- Affordable cost saving solution
- Blue fin protection increases life span of outdoor unit.

### INDOOR UNIT



### OUTDOOR UNIT





Submittal Data Sheet

Daikin OTERRA 115V 0.75-Ton Wall Mount Heat Pump System  
FTXQ09ASBU9RXQ09ASBU9

SYSTEM PERFORMANCE

|                                    |                |                               |                                                                |
|------------------------------------|----------------|-------------------------------|----------------------------------------------------------------|
| Indoor Unit Model No.              | FTXQ09ASBU9    | Indoor Unit Name:             | Daikin OTERRA 115V 0.75-Ton, Heat Pump, Wall Mount Indoor Unit |
| Outdoor Unit Model No.             | RXQ09ASBU9     | Outdoor Unit Name:            | Daikin OTERRA 115V 0.75-Ton, Heat Pump, Ductless Outdoor Unit  |
| Rated Cooling Capacity (Btu/hr):   | 9,000          | Rated Cooling Conditions:     | Indoor (°F DB/WB): 80 / 67<br>Ambient (°F DB/WB): 95 / 75      |
| Sensible Capacity (Btu/hr):        | 8,140          | Rated Piping Length(ft):      | 50                                                             |
| Max/Min Cooling Capacity (Btu/hr): | 10,500 / 2,800 | Rated Height Difference (ft): | 50.00                                                          |
| Cooling Input Power (kW):          | 1.110          | Heating Input Power (kW):     | 1.18                                                           |
| SEER2 (Non-Ducted/Ducted):         | 20.00 /        | HSPF2 (Non-Ducted/Ducted):    | 9.0 /                                                          |
| EER2 (Non-Ducted/Ducted):          | 12.00 /        |                               |                                                                |
| Rated Heating Capacity (Btu/hr):   | 10,900         | Rated Heating Conditions:     | Indoor (°F DB/WB): 70 / 60<br>Ambient (°F DB/WB): 47 / 43      |
| Max/Min Heating Capacity (Btu/hr): | 12,000 / 3,800 |                               |                                                                |

SYSTEM DETAILS

|                                        |      |                                   |          |
|----------------------------------------|------|-----------------------------------|----------|
| Refrigerant Type:                      | R-32 | Cooling Operation Range (°F DB):  | 50 - 115 |
| Holding Refrigerant Charge (lbs):      | 1.15 | Heating Operation Range (°F WB):  | 5 - 65   |
| Additional Charge (oz/ft):             | 0.22 | Max. Pipe Length (Vertical) (ft): | 50       |
| Pre-charge Piping (Length) (ft):       | 50   | Cooling Range w/Baffle (°F DB):   | -        |
| Max. Pipe Length (Total) (ft):         | 66   |                                   |          |
| Max Height Separation (Ind to Ind ft): | 50   |                                   |          |
| Fan/Compressor Drive Input:            | 11.3 |                                   |          |

## Submittal Data Sheet


Daikin OTERRA 115V 0.75-Ton Wall Mount Heat Pump System

FTXQ09ASBU9RXQ09ASBU9

### INDOOR UNIT DETAILS

|                                          |                          |                                  |                 |
|------------------------------------------|--------------------------|----------------------------------|-----------------|
| Power Supply (V/Hz/Ph):                  | 115 / 60 / 1             | Airflow Rate (H/M/L/SL) (CFM):   | 424/307/261/134 |
| Power Supply Connections:                | 4                        | Moisture Removal (Gal/hr):       |                 |
| Min. Circuit Amps MCA (A):               |                          | Gas Pipe Connection (inch):      | 3/8             |
| Max Overcurrent Protection (MOP) (A):    |                          | Liquid Pipe Connection (inch):   | 1/4             |
| Dimensions (HxWxD) (in):                 | 11-1/4 x 30-5/16 x 8-3/4 | Condensate Connection (inch):    | 5/8             |
| Ext. Static Pressure (Rated/Max) (inWg): | /                        | Sound Pressure (H/M/L/SL) (dBA): | 43/35/30/21     |
| Net Weight (lb):                         | 18                       | Sound Power Level (dBA):         |                 |

### DIMENSIONAL DRAWING - INDOOR UNIT

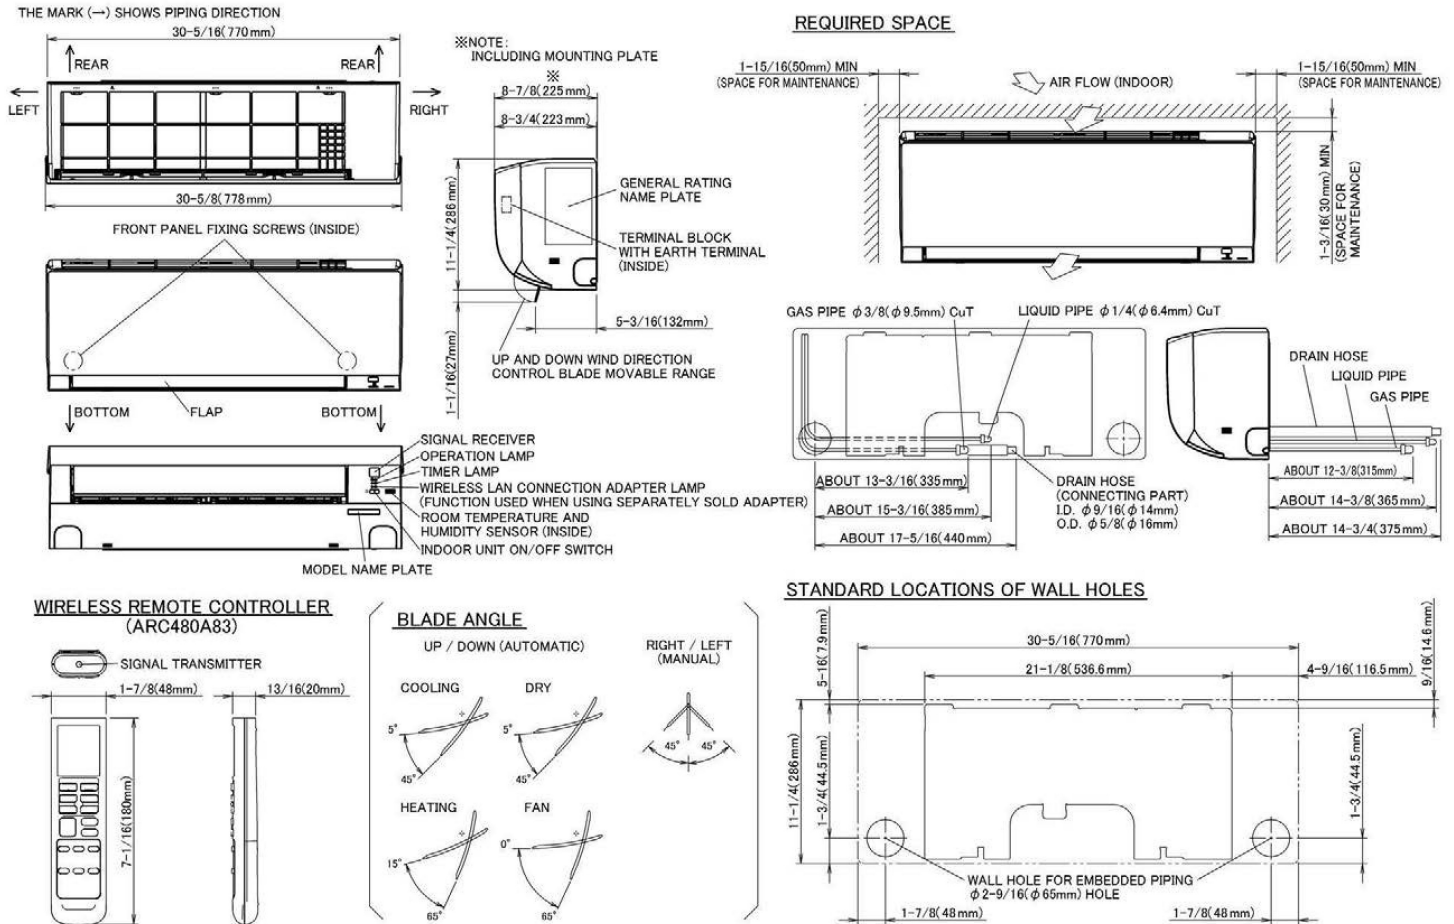



## FTXQ09ASBU9RXQ09ASBU9

|                                       |                              |                                |          |
|---------------------------------------|------------------------------|--------------------------------|----------|
| Power Supply (V/Hz/Ph):               | 115 / 60 / 1                 | Compressor Stage:              | Inverter |
| Power Supply Connections:             | 4                            | Capacity Control Range (%):    | -        |
| Min. Circuit Amps MCA (A):            | 14.9                         | Airflow Rate (H) (CFM):        | 1233     |
| Max Overcurrent Protection (MOP) (A): | 15                           | Gas Pipe Connection (inch):    | 3/8      |
| Max Starting Current MSC(A):          |                              | Liquid Pipe Connection (inch): | 1/4      |
| Rated Load Amps RLA(A):               |                              | Sound Pressure (H) (dBA):      | 48       |
| Dimensions (HxWxD) (in):              | 21-15/16 x 26-9/16 x 11-3/16 | Sound Power Level (dBA):       |          |
| Net Weight (lb):                      | 59                           |                                |          |

**4-HOLES FOR FOUNDATION BOLTS**  
5/16 OR 3/8 ( M8 OR M10 )

18-1/2 (470) 3-13/16 (97)

1/2 (13) 12-1/8 (308) 12-13/16 (325)

**MINIMUM SPACE FOR AIR PASSAGE**

WALL HEIGHT ON AIR OUTLET SIDE = LESS THAN 47-1/4 (1200)

5-7/8 (150) 1-15/16 (50) 3-15/16 (100) 1-15/16 (50) 1-15/16 (50) 1-15/16 (50) 1-15/16 (50) 3-15/16 (100) 1-15/16 (50)

**LIQUID STOP VALVE**  
( $\varnothing$  1/4 ( $\varnothing$ 6.4) Cut)

**GROUND**

**OUTDOOR AIR THERMISTOR**

**SERVICE PORT**

**STOP VALVE COVER**

**GAS STOP VALVE**  
( $\varnothing$  3/8 ( $\varnothing$ 9.5) Cut)

**IN CASE OF REMOVING STOP VALVE COVER AND PROTECTION PLATE**

**BRAND NAME LABEL**

**MANUFACTURER'S LABEL**

**DRAIN OUTLET**  
(1D  $\varnothing$  5/8 ( $\varnothing$ 15.9mm) HOSE FOR CONNECTION WITH DRAIN JOINT (option))

**\*A. \*B DRAIN OUTLET**  
WHEN CONDUCTING CONCENTRATED DRAIN PIPING WORK, ATTACH THE DRAIN CAPS (SERVICE REPAIR PARTS).

5/16 (8) 11-3/16 (284) 1/2 (12) 9/16 (15) 26-9/16 (675) 1-15/16 (50)

21-5/16 (557)

11-1/16 (18) 4-5/16 (110) 6-11/16 (170) 6-1/4 (159) 3/4 (19)

1-7/16 (37) 16-1/16 (408)

**HANDLE**



## Submittal Data Sheet

Daikin OTERRA 115V 0.75-Ton Wall Mount Heat Pump System

FTXQ09ASBU9RXQ09ASBU9

### INDOOR ACCESSORIES

| PART NUMBER | DESCRIPTION                                                        | INCLUDED |
|-------------|--------------------------------------------------------------------|----------|
| AZAI6WSPDKC | DKN Plus Interface                                                 | No       |
| BRC073A6    | Wired Remote Controller (Requires Additional Wire Harness)         | No       |
| BRC944B2    | Wired Remote Controller                                            | No       |
| BRCW901A03  | BRC944B2 CONTROL CABLE, 10FT                                       | No       |
| BRCW901A08  | Wired Remote Controller Cord - 8m/26ft                             | No       |
| BRP084A61   | Wi-Fi Adapter                                                      | No       |
| DCS301C71   | Unified On/Off Controller                                          | No       |
| DCS302C71   | Centralized Controller                                             | No       |
| DST301BA61  | Schedule Timer                                                     | No       |
| KAF970A46   | Titanium apatite photocatalytic air-purifying filter WITHOUT frame | No       |
| KRP067A41E  | Adaptor for wired remote controller                                | No       |
| KRP928BB2S  | RA Interface Adaptor for DIII-Net -                                | No       |

### OUTDOOR ACCESSORIES

| PART NUMBER | DESCRIPTION                               | INCLUDED |
|-------------|-------------------------------------------|----------|
| KKG067A41   | Back protection wire net (09 & 12)        | No       |
| KKP937A4    | Drain Plug for OD Unit                    | No       |
| KPS067A41   | Snow hood (intake side plate) (09 & 12)   | No       |
| KPS067A42   | Snow hood (intake rear plate) (09 & 12)   | No       |
| KPS067A44   | Snow hood (outlet) (09 & 12)              | No       |
| KPW937F4    | Air direction adjustment grille (09 & 12) | No       |