



Universal IDU - Cassette

Job Name: Location: Date:
 Engineer: Submitted to: Submitted by:
 Approval: Construction: Unit #:
 Reference: Drawing #:

Key Features:


- * **Integrated Wi-Fi** plus the Connectlife smart app ,put easy operation right at your fingertips.
- * **Build in A2L Safety Sensor** - Ensures safety for both homeowners and technicians
- * **360° Air Distribution**-Unit provides 360° air discharge for uniform airflow distribution within the conditioned space
- * **Fresh Air Connection**-Unit is capable of introducing outdoor air through a dedicated fresh air intake connection
- * **Built-in Condensate Pump**: Unit includes an internal condensate pump with a maximum lift of 47 inches
- * Self-cleaning indoor with **Hisense FrostClean™ technology** to reduces dust and bacteria for a healthier home
- * **Temperature Compensation Function** -can be configured via controller to maintain comfort in high-ceiling applications
- * Whisper-Quiet Operation with noise level as low as 35dB




SPECIFICATIONS

Model Name			ACU-09U3T25U	ACU-12U3T25U	ACU-18U3T25U	ACU-24U3T25U
Box code			Q2C	Q2C	Q3D	Q5D
Capacity	Cooling capacity	Btu/h	9000	12000	18000	24000
	Heating capacity	Btu/h	9000	12000	18000	24000
Electrical Data	Power	V/Hz/f	208/230 50/60 1	208/230 50/60 1	208/230 50/60 1	208/230 50/60 1
	Rated current	A	0.5	0.5	0.9	0.9
	Anti electric shock	/	Class I	Class I	Class I	Class I
	Degrees of protection	/	IPX4	IPX4	IPX4	IPX4
Fan Motor	Model	/	ZW465B500021	ZW465B500021	ZW511B500061	ZW511B500061
	Type/Qty	/	DC/1	DC/1	DC/1	DC/1
	Output	HP	1/13	1/13	1/10	1/10
	Speed(H/M/L)	r/min	700/600/500	700/600/500	420/3810/320	470/400/340
Air flow (H/M/L)		CFM	341/294/235	341/294/235	643/554/465	643/554/465
Noise Level (Sound Pressure Hi)		dB(A)	39	39	35	38
Dimension	Net Dimension (WxHxD)	inch	22-1/2 ×8-1/2×22-1/2	22-1/2 ×8-1/2×22-1/2	33-1/8 ×9-1/4 ×33-1/8	33-1/8 ×9-1/4 ×33-1/8
	Package Dimension (WxHxD)	inch	28-3/4 ×26-1/4×11-1/2	28-3/4 ×11-1/2×26-1/4	37-3/8 ×12-5/8 ×37-3/8	37-3/8 ×12-5/8×37-3/8
Weight	Net Weight	lbs	34.2	34.2	52.9	52.9
	Gross Weight	lbs	40.8	40.8	63.9	63.9
Pipe Size	Diameter(Liquid)	inch	1/4	1/4	1/4	3/8
	Diameter(Gas)	inch	3/8	3/8	1/2	5/8
Loading capacity		20°/40°/40HQ	140/298/330	140/298/330	84/168/192	84/168/192

9/12K

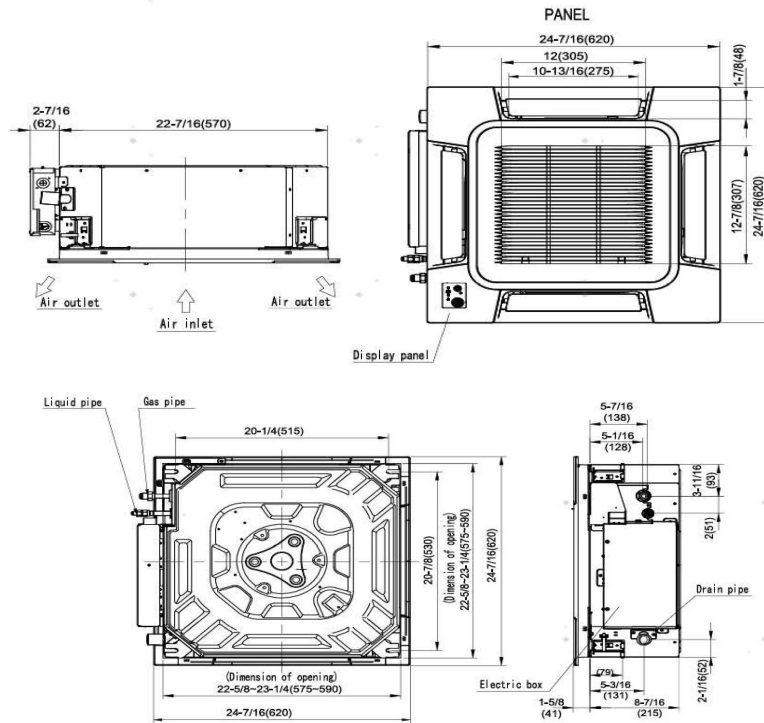

18/24K

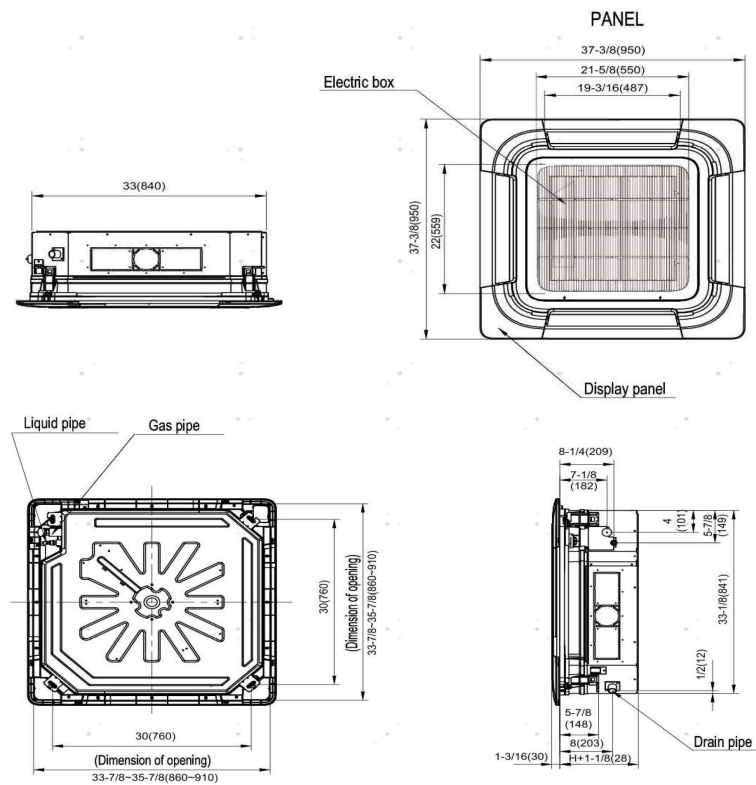


Model	H
18K/24K	236
36K	272

Accessories

Controller		
RCH-RTY5-0	Remote Controller	standard
HS-WC01U	Wired Controller (built-in infrared signal receiver)	optional
HS-WC02U	Wired Controller	optional
HS-WC01T	Central controller (Hisense IDU only)	optional

REMOTE CONTROLLER

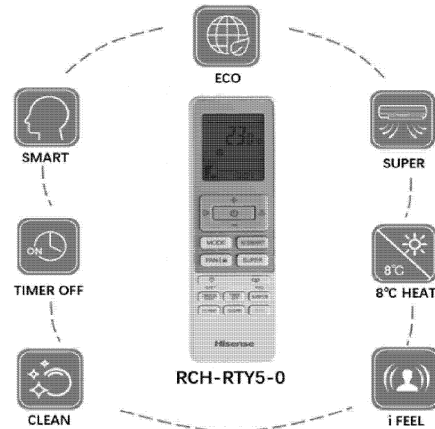

Button Description

	Press this button to select the operation mode
	Used to adjust the set temperature and the timer, also real time
	Used to adjust vertical adjustment louver swinging and set the desired up/down airflow direction
	Used to adjust the swing of the horizontal louver and set the left/right airflow direction
	Used to start or stop the fast cooling/heating (Fast cooling operates at high fan speed with 60°F (16°C) set temp automatically. Fast heating operates at auto fan speed with 80°F (30°C) set temp automatically)
	Used to select fan speed in sequence: auto, higher, high, medium, low, lower. Press this button for 5 seconds to activate LOCK mode; press it again for 5 seconds to deactivate the mode.
	Used to set or cancel i FEEL Mode. In i FEEL mode the Air Conditioner operates basis temperature sensor fitted in remote instead of machine. Advice to use i FEEL mode end the remote put where the indoor unit receives signal easily
	Used to set the Clean operation
	Used to start Smart Running Mode. Smart Mode automatically selects the appropriate operating mode—Cooling, Dry, Fan Only, or Heating

WIRED CONTROLLER



Large **LCD Display** for EZ read and control

HS-WC01U
HS-WC02U



24h Real Timer and **Weekly Timer** setting



Eliminate the feeling of being cold
Reduce power consumption



❖ **Signal receiver** of Remote Control – **only HS-WC01U**

❖ **Central Controller** for Max. 16 units - **only HS-WC01T**

Button Description

1. ON/OFF BUTTON

The appliance will be started or stopped when this button is pressed.

2. RUN INDICATOR

Indicates that the appliance is on.

3. MODE BUTTON

Press this button to select the operation mode.

4. FAN BUTTON

Used to select fan speed in sequence high-auto-low-medium-high.

5. SWING BUTTON

Used to stop or start the adjustment louver swinging and set the desired airflow direction.

6. TIMER/CLOCK BUTTON

Used to set the current time or set timer on/off.

7. SLEEP BUTTON

Used to set or cancel Sleep Mode operation.

8. ENTER BUTTON

Used to confirm settings.

9. CANCEL BUTTON

Used to cancel settings.

10. ADD. FUNC. BUTTON

Used to set filter clean, hot water, fresh air, electric heater, etc.

11. INCREASE SETTING BUTTON

Used to raise the set temperature;

It raise the values when setting.

12. DECREASE SETTING BUTTON

Used to lower the set temperature;

It lower the values when setting.

13. LIQUID CRYSTAL DISPLAY(LCD) SCREEN

Used to display indicator screens.

14. BUILT-IN INFRARED SIGNAL RECEIVER

Used to receive infrared signal.