



Submittal Data Sheet

SkyAir 4.0-Ton Multi-Position Air Handler Heat Pump System

FTA48AAVJUA-RZA48AAVJU

FEATURES

- All Aluminum Coil
- Less than 2% Air Leakage
- External Static Pressure up to 0.9 in. w.g.
- Optional Outside Air integration
- Factory integrated Refrigerant Leak Detection
- Factory Installed Disconnect Option (D-Model)
- Anti Corrosion Treatment on Heat Exchanger
- Dependable cooling and heating from -4F to 122F

BENEFITS

- Upflow, downflow, horizontal right and horizontal left installation configurations
- Wide line of 3W to 19W optional electric heat
- 10 Year Parts and Compressor Warranty
- Long Pipe Lengths allow layout flexibility

INDOOR UNIT



OUTDOOR UNIT





Submittal Data Sheet

SkyAir 4.0-Ton Multi-Position Air Handler Heat Pump System
FTA48AAVJUA-RZA48AAVJU

SYSTEM PERFORMANCE

Indoor Unit Model No.	FTA48AAVJUA	Indoor Unit Name:	SkyAir 4.0-Ton Multi-Position Air Handler Indoor Unit
Outdoor Unit Model No.	RZA48AAVJU	Outdoor Unit Name:	SkyAir 4.0 Ton, Heat Pump Outdoor Unit
Rated Cooling Capacity (Btu/hr):	47,000	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Sensible Capacity (Btu/hr):	32,000	Rated Piping Length(ft):	25
Max/Min Cooling Capacity (Btu/hr):	/	Rated Height Difference (ft):	0.00
Cooling Input Power (kW):	5.280		
SEER2 (Non-Ducted/Ducted):	/ 15.20	HSPF2 (Non-Ducted/Ducted):	/ 9.0
EER2 (Non-Ducted/Ducted):	/ 8.90		
Rated Heating Capacity (Btu/hr):	55,000	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43

SYSTEM DETAILS

Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	23 - 122
Holding Refrigerant Charge (lbs):	7.5	Heating Operation Range (°F WB):	-4 - 60
Additional Charge (oz/ft):	1.45	Max. Pipe Length (Vertical) (ft):	98
Pre-charge Piping (Length) (ft):	25	Cooling Range w/Baffle (°F DB):	23 - 122
Max. Pipe Length (Total) (ft):	230		
Max Height Separation (Ind to Ind ft):	0		

Submittal Data Sheet

SkyAir 4.0-Ton Multi-Position Air Handler Heat Pump System

FTA48AAVJUA-RZA48AAVJU


INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Airflow Rate (H/M/L) (CFM):	1520/1,290/1,060
Power Supply Connections:	F1, F2	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):	6.5	Gas Pipe Connection (inch):	5/8
Max Overcurrent Protection (MOP) (A):	15	Liquid Pipe Connection (inch):	3/8
Dimensions (HxWxD) (in):	53.43 x 21 x 21	Condensate Connection (inch):	3/4
Ext. Static Pressure (Rated/Max) (inWg):	/ 0.9	Sound Pressure (H/M/L) (dBA):	54/50/46
Net Weight (lb):	143	Sound Power Level (dBA):	

DIMENSIONAL DRAWING - INDOOR UNIT

FTA42 - 48AAVJUD
FTA42 - 48AAVJUA

Unit : in. (mm)

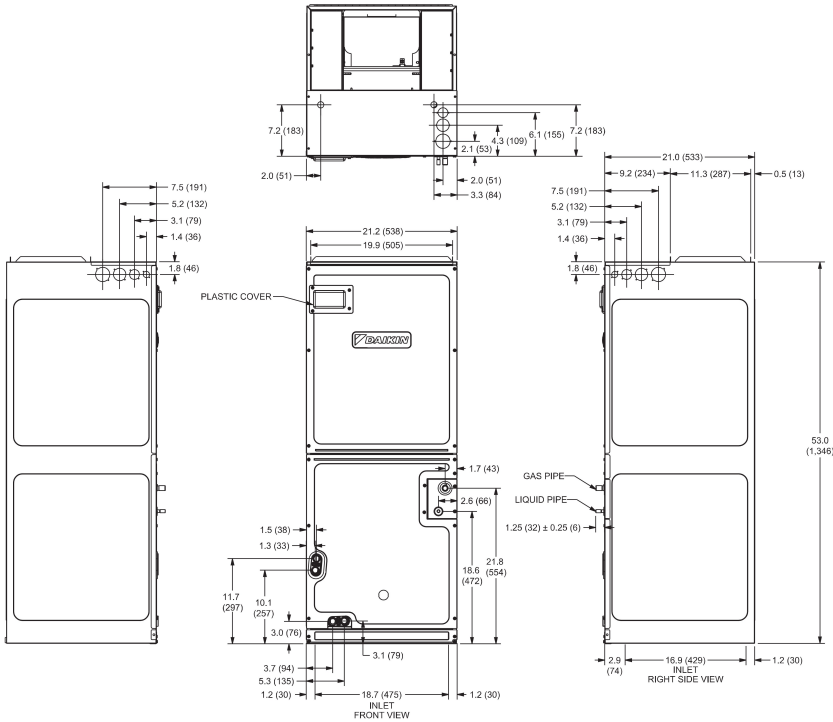



Submittal Data Sheet

SkyAir 4.0-Ton Multi-Position Air Handler Heat Pump System
FTA48AAVJUA-RZA48AAVJU

INDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
BRC1NRV71	R32 Navigation Remote Controller	No
BRP9A71	Ventilation and alarm adapter	No
BRP9A72	Ventilation and alarm adapter	No
HKTSD05X1	Electric Heat Kit, 5 KW	No
HKTSD08X1	Electric Heat Kit, 8 KW	No
HKTSD10X1	Electric Heat Kit, 10 KW	No
HKTSN05X1	Electric Heat Kit, 5 KW, 1 PH	No
HKTSN06X1	Electric Heat Kit, 6 KW, 1 PH	No
HKTSN08X1	Electric Heat Kit, 8 KW, 1 PH	No
HKTSN10X1	Electric Heat Kit, 10 KW, 1 PH	No
KRCS01-6B	Remote Sensor	No
KRP1BB101	Adaptor PCB Installation Box	No
KRP1C77	Wiring Adapter PCB	No
KRP4A74	Group Control Adaptor PCB (Installation box for adaptor PCB "KRP1BB101" is necessary)	No
KRP4A93	Adaptor PCB Installation Box	No

OUTDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
BRP2A82	ABC Terminal for VRV IV S	No
KEH042A41A	Drain Pan heater for single phase VRVs and SkyAir	No
KPW082A41	Air direction adjustment grille	No
KRC19-26A6	COOL/HEAT SELECTOR	No