



Submittal Data Sheet

SkyAir 3.5-Ton Roundflow Sensing Cassette Heat Pump System

FCA42AAVJU-RZA42AAVJU

FEATURES

- True 360° Airflow and three room sensors enables optimized occupant comfort and efficiency
- 18 different possible airflow patterns, ensuring ideal air distribution to maximize comfort and efficiency
- Dependable heat pump operation from -4°F in heating to 122°F in cooling
- Code Compliant Refrigerant Detection System (RDS) integrated
- Direct Current Fan motor and auto logic that adjusts fan speed based on space load
- Compact design allows for installation in small ceiling voids
- Inverter technology delivers precise temperature control and superior energy efficiency
- Air Conditioning only option with switch on outdoor board
- Optional Outdoor Drain Pan Heater available

BENEFITS

- Compact design to allow for installation in small ceiling voids
- Long piping lengths allow layout flexibility
- 10-year parts limited warranty for residential/commercial applications
- Refrigerant Leak Detection integration with ventilation, dampers, alarms and monitoring systems
- Optional self-cleaning filter panel for filtration efficiency and low maintenance costs
- High Efficiency filter options
- Ventilation connection kit available

INDOOR UNIT



OUTDOOR UNIT





Submittal Data Sheet

SkyAir 3.5-Ton Roundflow Sensing Cassette Heat Pump System
FCA42AAVJU-RZA42AAVJU

SYSTEM PERFORMANCE

Indoor Unit Model No.	FCA42AAVJU	Indoor Unit Name:	SkyAir 3.5-Ton Roundflow Sensing Cassette Indoor Unit
Outdoor Unit Model No.	RZA42AAVJU	Outdoor Unit Name:	SkyAir 3.5 Ton, Heat Pump Outdoor Unit
Rated Cooling Capacity (Btu/hr):	42,000	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Sensible Capacity (Btu/hr):	30,600	Rated Piping Length(ft):	25
Max/Min Cooling Capacity (Btu/hr):	/	Rated Height Difference (ft):	0.00
Cooling Input Power (kW):	4.000		
SEER2 (Non-Ducted/Ducted):	18.90 /	HSPF2 (Non-Ducted/Ducted):	10.2 /
EER2 (Non-Ducted/Ducted):	10.50 /		
Rated Heating Capacity (Btu/hr):	47,000	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43

SYSTEM DETAILS

Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	23 - 122
Holding Refrigerant Charge (lbs):	7.5	Heating Operation Range (°F WB):	-4 - 60
Additional Charge (oz/ft):	0.56	Max. Pipe Length (Vertical) (ft):	98
Pre-charge Piping (Length) (ft):	25	Cooling Range w/Baffle (°F DB):	23 - 122
Max. Pipe Length (Total) (ft):	230		
Max Height Separation (Ind to Ind ft):	0		




Submittal Data Sheet
SkyAir 3.5-Ton Roundflow Sensing Cassette Heat Pump System
FCA42AAVJU-RZA42AAVJU

INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Airflow Rate (H/M/L) (CFM):	1253/971/741
Power Supply Connections:	T1, T2	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):	1.6	Gas Pipe Connection (inch):	5/8
Max Overcurrent Protection (MOP) (A):	15	Liquid Pipe Connection (inch):	3/8
Dimensions (HxWxD) (in):	11-11/32 x 33-1/16 x 33-1/16	Condensate Connection (inch):	1-1/4
Ext. Static Pressure (Rated/Max) (inWg):	/	Sound Pressure (H/M/L) (dBA):	47/40/35
Net Weight (lb):	58	Sound Power Level (dBA):	

DIMENSIONAL DRAWING - INDOOR UNIT

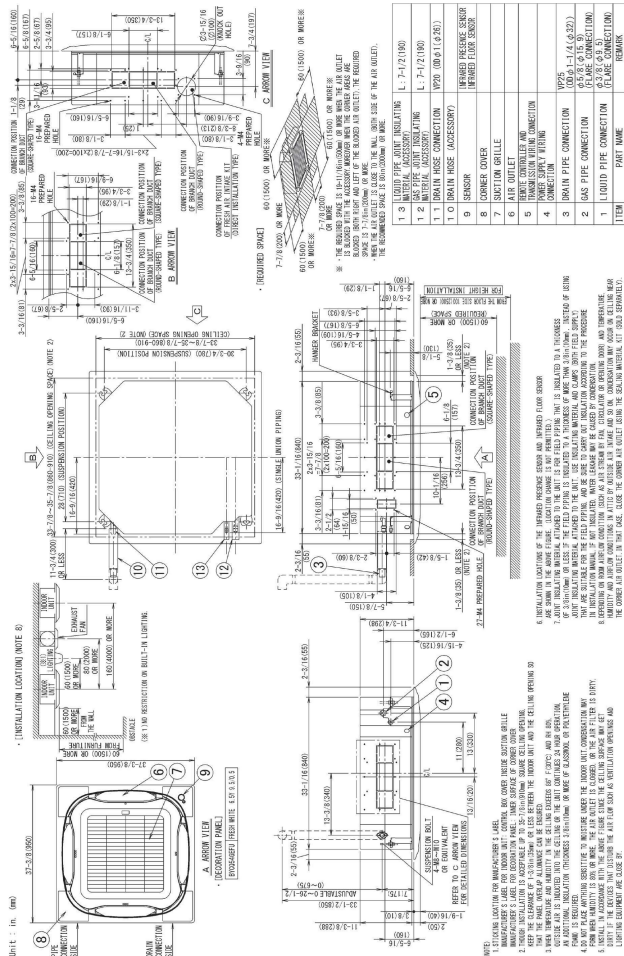


Submittal Data Sheet

SkyAir 3.5-Ton Roundflow Sensing Cassette Heat Pump System
FCA42AAVJU-RZA42AAVJU

OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Compressor Stage:	Inverter
Power Supply Connections:	H1, H2	Capacity Control Range (%):	-
Min. Circuit Amps MCA (A):	34.6	Airflow Rate (H) (CFM):	3000
Max Overcurrent Protection (MOP) (A):	35	Gas Pipe Connection (inch):	5/8
Max Starting Current MSC(A):		Liquid Pipe Connection (inch):	3/8
Rated Load Amps RLA(A):		Sound Pressure (H) (dBA):	56
Dimensions (HxWxD) (in):	34-1/4 x 43-5/16 x 18-1/8	Sound Power Level (dBA):	
Net Weight (lb):	234		

DIMENSIONAL DRAWING - OUTDOOR UNIT

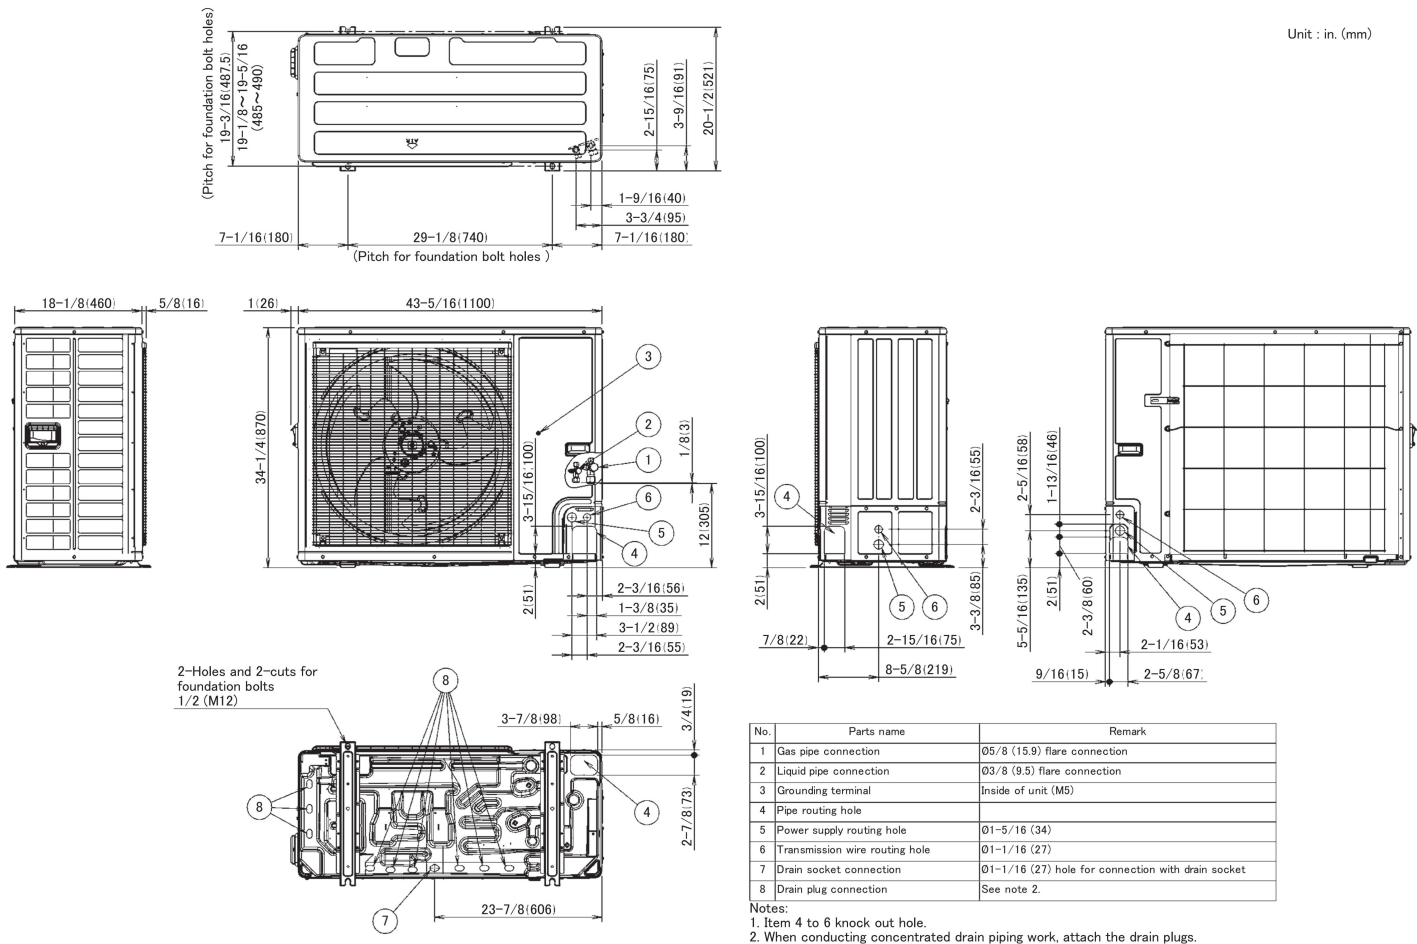



Submittal Data Sheet

SkyAir 3.5-Ton Roundflow Sensing Cassette Heat Pump System

FCA42AAVJU-RZA42AAVJU

INDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
BRC1NRV71	R32 Navigation Remote Controller	No
BYCQ54GEFU	Standard Sensing Deco Panel	No
BYCQ54GEGFU	Self-Cleaning Sensing Deco Panel	No
KAF5511D160	Replacement Long Life Filter	No
KAF554D160	Rep Filter	No
KDDP55C160-1	Fresh Air Intake Suction Chamber	No
KKHAP55A160	Connecting Pipe	No
KKHAP55B160	L-Pipe Extension	No
KRCS01-6B	Remote Sensor	No
KRP1C77	Wiring Adapter PCB	No
KRP4A74	Group Control Adaptor PCB (Installation box for adaptor PCB "KRP1BB101" is necessary)	No

OUTDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
BRP2A82	ABC Terminal for VRV IV S	No
KEH042A41A	Drain Pan heater for single phase VRVs and SkyAir	No
KPW082A41	Air direction adjustment grille	No
KRC19-26A6	COOL/HEAT SELECTOR	No