



Submittal Data Sheet

SkyAir 2.0-Ton Wall Mounted Heat Pump System

FAA24AAVJU-RZA24AAVJU

FEATURES

- Easy to clean front panel with a flat smooth surface that can be removed for additional cleaning
- Up-down and left-right airflow direction control
- Efficient operation and year-round energy savings through Smart Variable Refrigerant Temperature (VRT) technology
- New D4 Communication protocol which unlocks remote access to units through Daikin Hero
- Factory-installed integrated refrigerant leak sensor
- Dispersion Mode: Higher airflow rate for leak mitigation through circulation
- Terminal for connection, via optional relay PCB, to external alarms and monitoring systems
- Dependable heat pump operation from -4F in Heating to 122F in Cooling

INDOOR UNIT



BENEFITS

- 10 year limited parts and compressor warranty
- For rooms with no false ceiling nor free floor space
- Long piping lengths allow layout flexibility

OUTDOOR UNIT





Submittal Data Sheet

SkyAir 2.0-Ton Wall Mounted Heat Pump System
FAA24AAVJU-RZA24AAVJU

SYSTEM PERFORMANCE

Indoor Unit Model No.	FAA24AAVJU	Indoor Unit Name:	SkyAir 1.5-Ton Wall Mount Indoor Unit
Outdoor Unit Model No.	RZA24AAVJU	Outdoor Unit Name:	SkyAir 2.0 Ton, Heat Pump Outdoor Unit
Rated Cooling Capacity (Btu/hr):	24,000	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Sensible Capacity (Btu/hr):		Rated Piping Length(ft):	25
Max/Min Cooling Capacity (Btu/hr):	/	Rated Height Difference (ft):	0.00
Cooling Input Power (kW):	2.100		
SEER2 (Non-Ducted/Ducted):	18.20 /	HSPF2 (Non-Ducted/Ducted):	7.8 /
EER2 (Non-Ducted/Ducted):	11.40 /		
Rated Heating Capacity (Btu/hr):	27,000	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43

SYSTEM DETAILS

Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	23 - 122
Holding Refrigerant Charge (lbs):	7.5	Heating Operation Range (°F WB):	-4 - 60
Additional Charge (oz/ft):	0.56	Max. Pipe Length (Vertical) (ft):	98
Pre-charge Piping (Length) (ft):	25	Cooling Range w/Baffle (°F DB):	23 - 122
Max. Pipe Length (Total) (ft):	230		
Max Height Separation (Ind to Ind ft):	0		
Fan/Compressor Drive Input:			

Submittal Data Sheet

SkyAir 2.0-Ton Wall Mounted Heat Pump System


FAA24AAVJU-RZA24AAVJU

INDOOR UNIT DETAILS



Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Airflow Rate (H/M/L) (CFM):	670/565/476
Power Supply Connections:	T1, T2	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):	0.6	Gas Pipe Connection (inch):	5/8
Max Overcurrent Protection (MOP) (A):	15	Liquid Pipe Connection (inch):	3/8
Dimensions (HxWxD) (in):	11-5/8 x 44-1/8 x 9-3/4	Condensate Connection (inch):	11/16
Ext. Static Pressure (Rated/Max) (inWg):	/	Sound Pressure (H/M/L) (dBA):	45/40/35
Net Weight (lb):	35.3	Sound Power Level (dBA):	

DIMENSIONAL DRAWING - INDOOR UNIT


Unit : in. (mm)



THE MARK (→) SHOWS PIPING DIRECTION

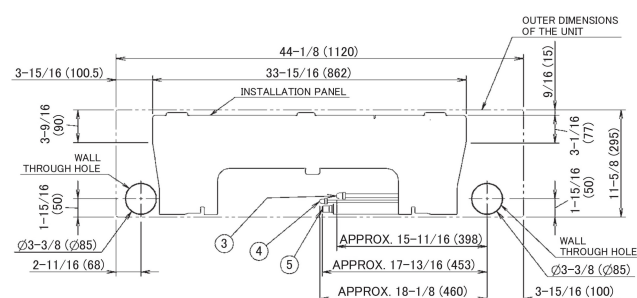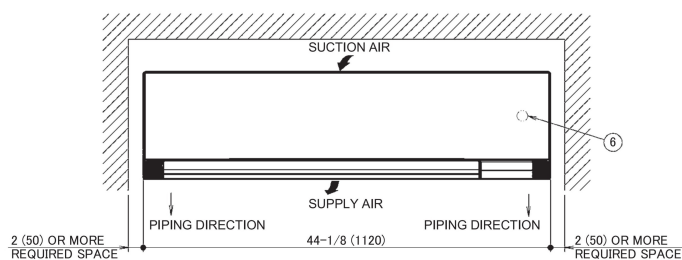

STANDARD LOCATION NO A WALL

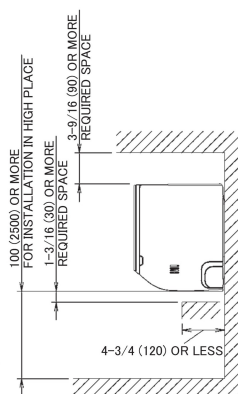

7	LEFT SIDE PIPE CONNECTION HOLE	
6	GROUNDING TERMINAL	M4
5	DRAIN HOSE	EXTERNAL DIA. $\phi 5/8(\phi 16)$
4	LIQUID PIPE	$\phi 3/8(\phi 9.5)$ FLARE CONNECTION
3	GAS PIPE	$\phi 5/8(\phi 15.9)$ FLARE CONNECTION
2	FRONT GRILLE	
1	FRONT PANEL	
NO	NAME	DESCRIPTION

3D158193

Submittal Data Sheet


SkyAir 2.0-Ton Wall Mounted Heat Pump System

FAA24AAVJU-RZA24AAVJU

OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Compressor Stage:	Inverter
Power Supply Connections:	H1, H2	Capacity Control Range (%):	-
Min. Circuit Amps MCA (A):	19.8	Airflow Rate (H) (CFM):	3000
Max Overcurrent Protection (MOP) (A):	20	Gas Pipe Connection (inch):	5/8
Max Starting Current MSC(A):		Liquid Pipe Connection (inch):	3/8
Rated Load Amps RLA(A):		Sound Pressure (H) (dBA):	56
Dimensions (HxWxD) (in):	34-1/4 x 43-5/16 x 18-1/8	Sound Power Level (dBA):	
Net Weight (lb):	234		

DIMENSIONAL DRAWING - OUTDOOR UNIT

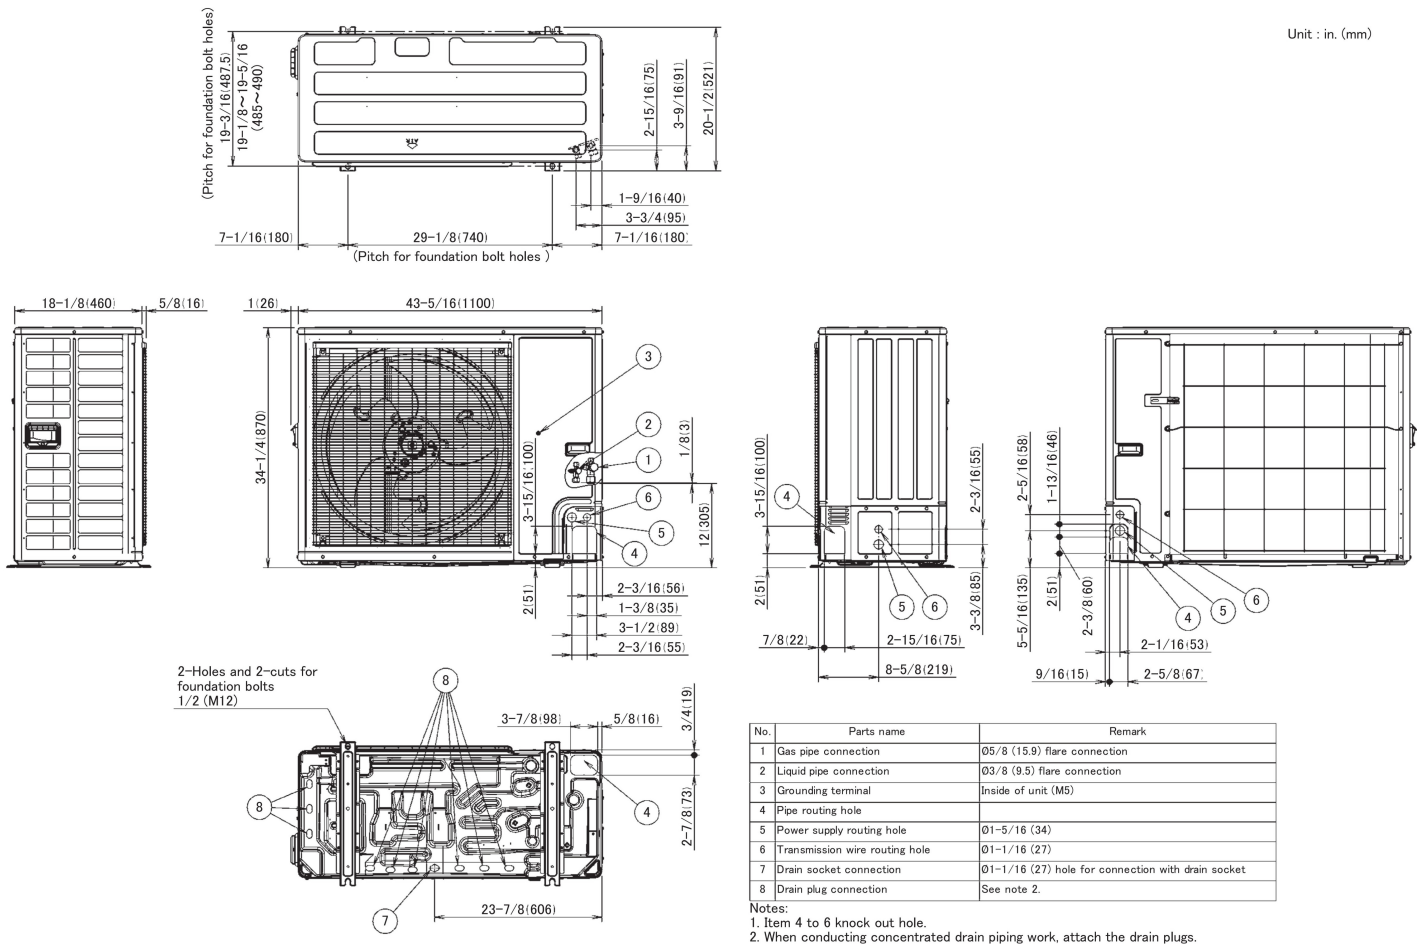



Submittal Data Sheet

SkyAir 2.0-Ton Wall Mounted Heat Pump System

FAA24AAVJU-RZA24AAVJU

INDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
BRC1NRV71	R32 Navigation Remote Controller	No
BRP9A72	Ventilation and alarm adapter	No
DACA-CP3-1	Si-30 Condensate Pump	No
DCM601B71	i-Touch Manager (iTM)	No
DGE601A53	DIII Plus Adaptor Slot card (for use with the DIII Plus Adaptor (DGE601A72))	No
DGE601A72	DIII-Net Plus Adaptor (for use with the Pro Edge and iTM)	No
KRP1C77	Wiring Adapter PCB	No
KRP4A74	Group Control Adaptor PCB (Installation box for adaptor PCB "KRP1BB101" is necessary)	No
KRP4A93	Adaptor PCB Installation Box	No

OUTDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
BRP2A82	ABC Terminal for VRV IV S	No
KEH042A41A	Drain Pan heater for single phase VRVs and SkyAir	No
KPW082A41	Air direction adjustment grille	No
KRC19-26A6	COOL/HEAT SELECTOR	No