




Submittal Data Sheet

Daikin 2.0-Ton, 3-Port, Heat Pump, Ductless Outdoor Unit
3MXM24AVJU8

FEATURES

- Connect 2 to 3 indoor units with a single outdoor unit
- High-efficiency inverter driven swing compressor
- Cooling Operating Limit (14°~114.8°F/-10°~46°C)
- Heating Operating Limit (5°~59.9°F/-15°~15.5°C)
- Anti-corrosion treatment of outdoor heat exchanger
- Specialized drain pan design for improved cold climate drainage
- Pre Charged to 131.6ft (40 m)
- Night Quiet Mode
- Automatic Defrost
- Quick Warming Function
- Priority Room Setting
- Cool/Heat mode lock
- Unit performs self diagnosis and indicates results using LED lights
- Wiring error check function
- PAM Control

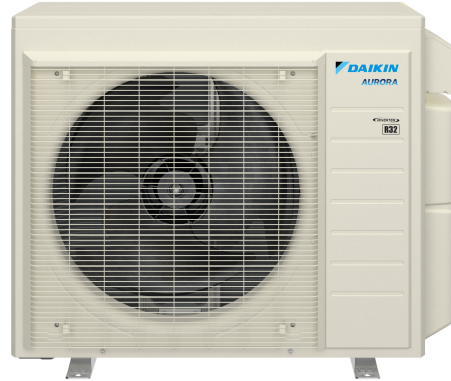

BENEFITS

- Single Fan allows for multiple installation locations
- 12 year residential limited parts and compressor warranty with online registration
- 5 Year limited parts warranty for commercial applications
- Long piping lengths, up to 230 ft
- High efficiency cooling and heating operation provides utility bill savings
- Multiple indoor unit style options available



Submittal Data Sheet

Daikin 2.0-Ton, 3-Port, Heat Pump, Ductless Outdoor Unit
3MXM24AVJU8

EFFICIENCY					PERFORMANCE			
	SEER2	EER2	HSPF2	COP	COOLING:		HEATING:	
Non-Ducted:	21.00	12.00	10.00	1.80	Rated (Btu/hr):	23,000	Rated (Btu/hr):	24,000
Ducted:	16.00	9.80	8.50	1.76	Operating Range:	14°F - 115°F	Operating Range:	5°F - 60°F
Mixed:	18.50	10.90	9.25	1.78	Rated Cooling Conditions:		Rated Heating Conditions:	
					Indoor (°F DB/DB): 80 / 67 Ambient (°F DB/WB): 95 / 75		Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43	


ELECTRICAL			PIPING		
Power Supply (V/Hz/Ph): *See Engineering Manuals for other voltages.	*208-230 / 60 / 1		Max. System Piping Length: (feet):	230	Gas Conn. (inch): 3/8
System MCA: (Min.circuit amps)	19.9		Max. Interunit Piping Length: (feet):	230	Liquid Conn. (inch): 1/4
System MFA: (Max.fuse amps)	25.0		Max. Height Difference IDU to ODU (feet):	49.25	Drain Conn. (inch): 5/8
Compressor RLA: (Rated load amps)			Max. Height Difference IDU to IDU (feet):	24.6	
Outdoor fan motor FLA: (Full load amps)			Refrigerant Pre-Charged Pipe Length (ft):	131.25	
Outdoor fan motor W: (Rated output watts)					

SPECIFICATIONS			
Compressor Type:	Swing	Compressor Stage:	Inverter
Refrigerant Type:	R-32	Refrigerant Oil:	FW68DA
Factory Charge (Lbs):	4.9	Additional Refrigerant Charge (Ozs/ft):	0.22
COOLING - Airflow Rate (cfm):		HEATING - Airflow Rate (cfm):	
High:	2,055	High:	2,140
Med:		Med:	
Low:		Low:	
Sound Level (dBA):	52	Sound Level (dBA):	54
Dimensions (HxWxD) (in):	29-1/2 x 34-1/4 x 12-5/8	Net Weight (lb):	140

Submittal Data Sheet

Daikin 2.0-Ton, 3-Port, Heat Pump, Ductless Outdoor Unit
3MXM24AVJU8

DIMENSIONAL DRAWING

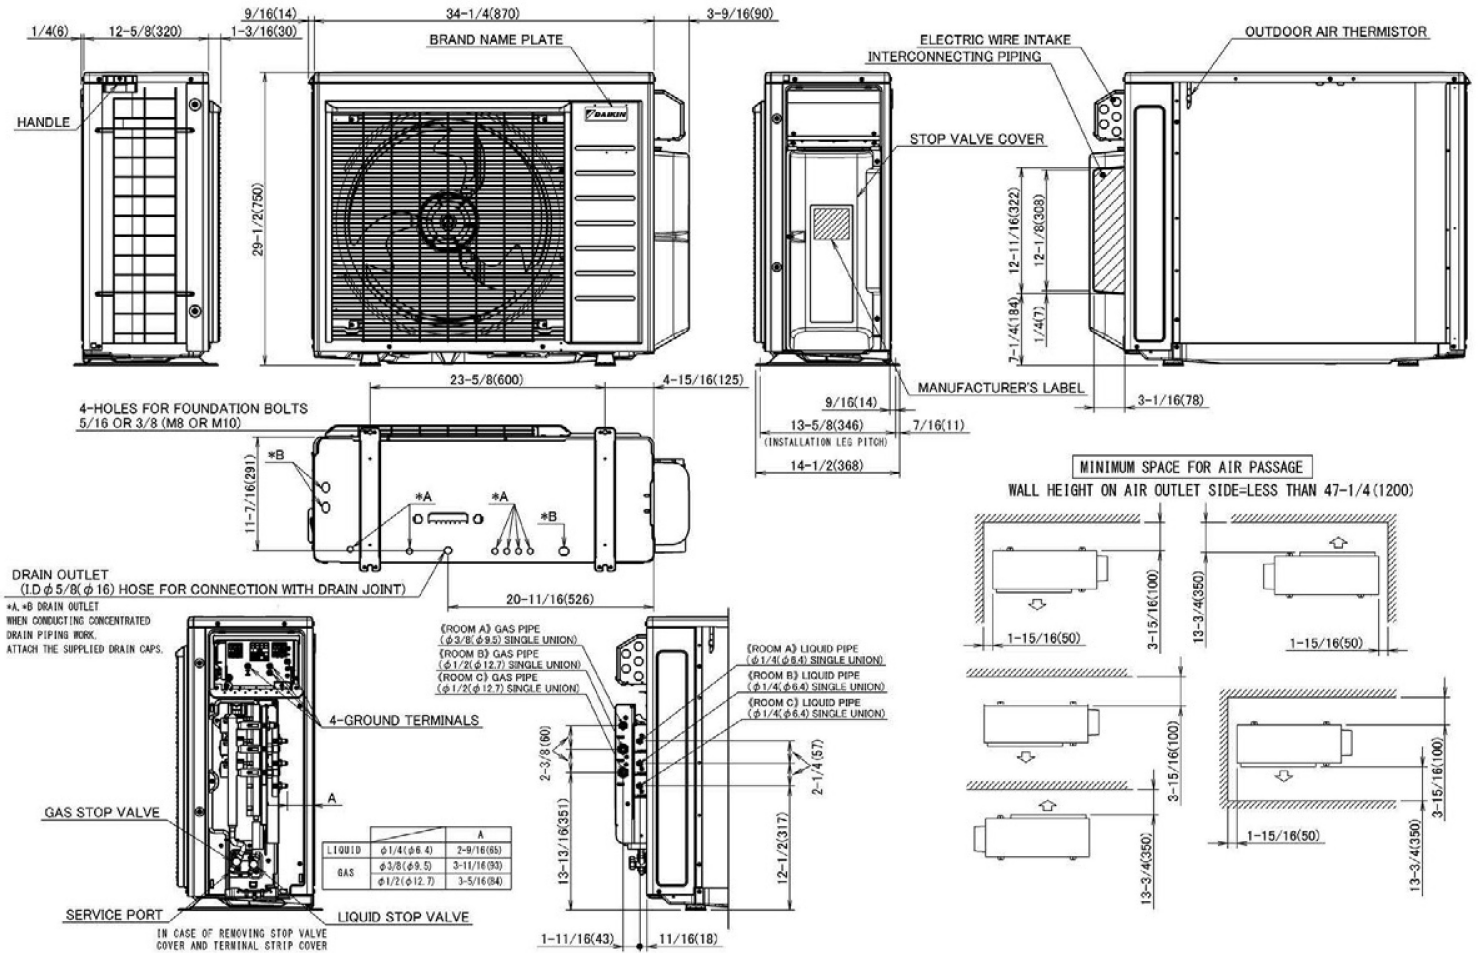



Submittal Data Sheet

Daikin 2.0-Ton, 3-Port, Heat Pump, Ductless Outdoor Unit
3MXM24AVJU8

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
KEH064A41	Drain Pan Heater	No
KKG063A44	Back Protection Wire Net	No
KKP937A4	Drain Plug for OD Unit	Yes
KPS063A41	Snow hood (intake side plate) (15, 18 & 24)	No
KPS063A44	Snow hood (intake rear plate) (15,18,24,30 & 36)	No
KPS063A47	Snow hood (outlet) (15, 18 & 24)	No
KPW063B4	Air direction adjustment grille	No