

Horizontal Discharge Heat Pump
SEER2 up to 22.00 and HSPF2 up to 10.00

Outdoor Unit Model AMO2-18U3T25U

Job Name:	Location:	Date:
Engineer:	Submitted to:	Submitted by:
Approval:	Construction:	Unit #:
Reference:	Drawing #:	

Key Features:

ENERGY STAR qualified 70+% heating at -13°F (-25°C) 18-45k

Xtreme Heat up to 100% Heating at 5°F (5 Zone 86%)

Long connection pipes up to 262t length, 49tt height

Built-in condenser base pan heater & crank case heater

Low temperature heating down to -13°F (-25°C)

Low temperature cooling down to 5°F (-15°C)

Connected capacity up 130%

Universal IDU compatible

Smart control logic guarantees the R454B refrigerant distribution of each indoor units and balances cooling capacity or heating capacity for each room.

"Hi-Checker" built-in for identification of most errors

Built-in Wi-Fi plus the Connectlife smart app for effortless system control with walmount units



www.HisenseComfort.com

SPECIFICATIONS

AHRI Certificate # Ducted	216472833
AHRI Certificate # Non-Ducted	216472831
AHRI Certificate # - Mixed	216472840
Outdoor Unit	AMO2-18U3T25U

EFFICIENCY (Ducted)		
SEER2	Btu/ (W.h)	17.5
EER2	Btu/ (W.h)	12
HSPF2	Btu/ (W.h)	9.4
COP @ 47°F	W/W	4.2
COP @ 5°F	W/W	1.96

EFFICIENCY (Mixed)		
SEER2	Btu/ (W.h)	19.75
EER2	Btu/ (W.h)	12.65
HSPF2	Btu/ (W.h)	9.7
COP @ 47°F	W/W	4.01
COP @ 5°F	W/W	1.96

Cooling Performance		
*Rated Capacity (Ducted)	BTU/H	18000
*Rated Capacity (Non-Ducted)	BTU/H	18000
*Rated Capacity (Mixed)	BTU/H	18000
Min.-Max. Capacity (Ducted)	BTU/H	14000-24200
Min.-Max. Capacity (Non-Ducted)	BTU/H	9000-22000
Min.-Max. Capacity (Mixed)	BTU/H	12950-23150
Capacity @ 125°F Max (Ducted)	BTU/H	14500
Capacity @ 125°F Max (Non-Ducted)	BTU/H	15300
Capacity @ 125°F Max (Mixed)	BTU/H	14900
Rated Power Input (Ducted)	W	1500
Rated Power Input (Non-Ducted)	W	1350
Rated Power Input (Mixed)	W	1423
Min.-Max. Power Input (Ducted)	W	1320-2700
Min.-Max. Power Input (Non-Ducted)	W	510-2610
Min.-Max. Power Input (Mixed)	W	1140-2325
*Testing Conditions:Indoor: 80°F DB / 67°F WB Outdoor: 95°F DB / 75°F WB.		

Heating Performance		
*Rated Capacity (Ducted)	BTU/H	18000
*Rated Capacity (Non-Ducted)	BTU/H	18000
*Rated Capacity (Mixed)	BTU/H	18000
Min.-Max. Capacity (Ducted)	BTU/H	13700-26300
Min.-Max. Capacity (Non-Ducted)	BTU/H	14500-30000
Min.-Max. Capacity (Mixed)	BTU/H	13800-25660
Rated Power Input (Ducted)	W	1255
Rated Power Input (Non-Ducted)	W	1380
Rated Power Input (Mixed)	W	1315
Min.-Max. Power Input (Ducted)	W	1320-2715
Min.-Max. Power Input (Non-Ducted)	W	450-3381
Min.-Max. Power Input (Mixed)	W	1233-2250
Capacity @ 17°F Rated /Max (Ducted)	BTU/H	11900/17800
Capacity @ 17°F Rated /Max (Non-Ducted)	BTU/H	11500/18000
Capacity @ 17°F Rated /Max (Mixed)	BTU/H	11700/18050
Capacity @ 5°F Rated (Max) (Ducted)	BTU/H	17000
Capacity @ 5°F Rated (Max) (Non-Ducted)	BTU/H	18000
Capacity @ 5°F Rated (Max) (Mixed)	BTU/H	17400
Capacity @ -13°F Max (Ducted)	BTU/H	13300
Capacity @ -13°F Max (Non-Ducted)	BTU/H	13400
Capacity @ -13°F Max (Mixed)	BTU/H	13350
* Testing Conditions: Indoor: 70°F DB / 60°F WB Outdoor: 47°F DB / 43°F WB		

PIPING and Refrigerant		
Liquid Pipe Size O.D	in (mm)	1/4" (Ø6.35)
Gas Pipe Size O.D	in (mm)	3/8" (Ø9.52)
Maximum Piping Length	ft (m)	164(50)
Maximum Height Difference	ft (m)	49(15)
Refrigerant Type	/	R454B
Refrigerant Pre-charged Amount	oz(kg)	51.15(1.45)
Max. Pre-charged Length(ft/m)	ft (m)	50(15)
Additional Charge of Refrigerant	oz/ft	0.16
Connection Method 【 Flared/Braze】	/	Flare

EFFICIENCY (Non- Ducted)		
SEER2	Btu/ (W.h)	22
EER2	Btu/ (W.h)	13.3
HSPF2	Btu/ (W.h)	10
COP @ 47°F	W/W	3.82
COP @ 5°F	W/W	1.99


Standard Operating Range(°F/°C)	
Outdoor Cooling °F (°C)	5 to 125 (-15 to 52)
Outdoor Heating °F (°C)	-13 to 75 (-25 to 24)

ELECTRICAL DATA		
System power supply		
Voltage, Hertz,Phase	V/ph/Hz	208/230V1Ph,50/60Hz
Available Voltage Range	V	187 - 253
Cooling / Heating Rated Amps (Ducted)	A	6.7/5.6
Cooling / Heating Rated Amps (Non-Ducted)	A	6/6.1
Cooling / Heating Rated Amps (Mixed)	A	6.3/5.8
Communication Wiring Size	NO-AWG	4×16
Power cable Size	NO-AWG	3×12
System MCA	A	21
System MOCP	A	25
MCA - Minimum Circuit Ampacity		
MOP - Maximum Overcurrent Protection		

OUTDOOR UNIT SPECIFICATIONS:		
Compressor		
Type	/	ROTARY-INVERTER
Model	/	KRD220XAA21
Brand	/	Panasonic
Capacity	Btu/h	20898
Input	W	1870
Rated current Amps (RLA)	A	15
Refrigerant Oil Type	/	FW68S
Refrigerant Oil Amount	ml	500
ODU Throttle Type	/	EEV
Outdoor Fan Motor		
Model	/	ZWB1710L00A
Type/Qty	/	DC/1
Motor output	HP	1/12
RLA	A	1.2
Speed	r/min	880
Outdoor Airflow Rate		
Cooling (H)	CFM	1850
	m3/h	3150
Outdoor Sound Pressure Level		
High	dB (A)	55
Fin Type /Tube Type	Hydrophilic aluminium/ Copper	
Coating on Fin	colour ~ hours	GOLD-1500
Net Dimensions (W×D×H)	In	33-7/8x12-1/4x26-3/8
	mm	860×310×670
Package (W×D×H)	In	39x17-3/4x28-3/4
	mm	990×450×730
Net Weight	Lbs.	101.4
	kg	46
Shipping Weight	Lbs.	112.4
	kg	51

Outdoor Unit Dimension

Inch (mm)

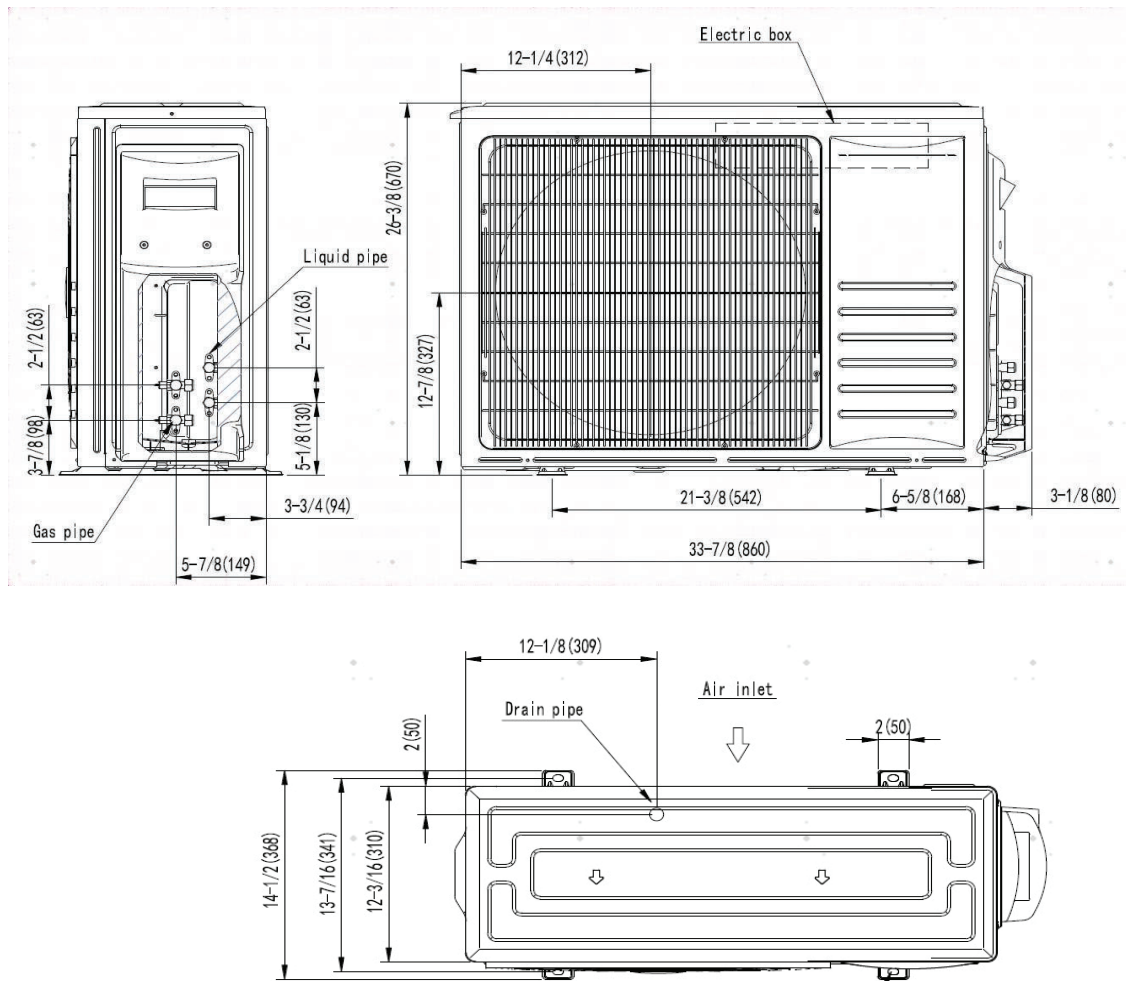

Accessories

Adaptors		
No	Description	Part number
1	9.52 change into 12.7	1493010
2	9.52 change into 15.88	2014749
3	6.35 change into 9.52	2014748

note:if you need extra adaptors ,please purchase separately.



Scan the QR code to explore more
 Warranty•Requires registration - some restrictions apply
 Due to continuous improvements,specifications are subject to change without notice.
 Version:02-02-2026