

Hisense

Hi-MULTI

Horizontal Discharge Heat Pump SEER2 up to 23.00 and HSPF2 up to 10.00

Outdoor Unit Model AMO3-27U3T25U

Job Name:	Location:	Date:
Engineer:	Submitted to:	Submitted by:
Approval:	Construction:	Unit #:
Reference:	Drawing #:	

Key Features:

ENERGY STAR qualified 70+% heating at -13°F (-25°C) 18-45k

Xtreme Heat up to 100% Heating at 5°F (5 Zone 86%)

Long connection pipes up to 262t length, 49tt height

Built-in condenser base pan heater & crank case heater

Low temperature heating down to -13°F (-25°C)

Low temperature cooling down to 5°F (-15°C)


Connected capacity up 130%

Universal IDU compatible

Smart control logic guarantees the R454B refrigerant distribution of each indoor units and balances cooling capacity or heating capacity for each room.

"Hi-Checker" built-in for identification of most errors

Built-in Wi-Fi plus the Connectlife smart app for effortless system control with walmount units

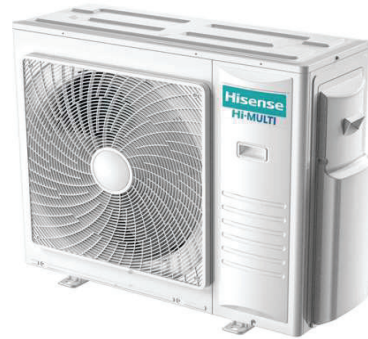

www.HisenseComfort.com

SPECIFICATIONS

AHRI Certificate # Ducted	216472841
AHRI Certificate # Non-Ducted	216472832
AHRI Certificate # - Mixed	216472842
Outdoor Unit	AM03-27U3T25U

EFFICIENCY (Ducted)		
SEER2	Btu/ (W.h)	18
EER2	Btu/ (W.h)	11.5
HSPF2	Btu/ (W.h)	8.8
COP @ 47°F	W/W	3.6
COP @ 5°F	W/W	1.84

EFFICIENCY (Mixed)		
SEER2	Btu/ (W.h)	20.5
EER2	Btu/ (W.h)	12.2
HSPF2	Btu/ (W.h)	9.4
COP @ 47°F	W/W	3.6
COP @ 5°F	W/W	1.82

Cooling Performance		
*Rated Capacity (Ducted)	BTU/H	27000
*Rated Capacity (Non-Ducted)	BTU/H	27000
*Rated Capacity (Mixed)	BTU/H	27000
Min.-Max. Capacity (Ducted)	BTU/H	13300-38800
Min.-Max. Capacity (Non-Ducted)	BTU/H	9000-31000
Min.-Max. Capacity (Mixed)	BTU/H	11400-35050
Capacity @ 125°F Max (Ducted)	BTU/H	17200
Capacity @ 125°F Max (Non-Ducted)	BTU/H	19000
Capacity @ 125°F Max (Mixed)	BTU/H	18500
Rated Power Input (Ducted)	W	2345
Rated Power Input (Non-Ducted)	W	2100
Rated Power Input (Mixed)	W	2213
Min.-Max. Power Input (Ducted)	W	1230-4380
Min.-Max. Power Input (Non-Ducted)	W	850-3000
Min.-Max. Power Input (Mixed)	W	1060-3635
* Testing Conditions:Indoor: 80°F DB / 67°F WB Outdoor: 95°F DB / 75°F WB.		

Heating Performance		
*Rated Capacity (Ducted)	BTU/H	27000
*Rated Capacity (Non-Ducted)	BTU/H	27000
*Rated Capacity (Mixed)	BTU/H	27000
Min.-Max. Capacity (Ducted)	BTU/H	14760-38675
Min.-Max. Capacity (Non-Ducted)	BTU/H	20100-44000
Min.-Max. Capacity (Mixed)	BTU/H	13815-38721
Rated Power Input (Ducted)	W	2200
Rated Power Input (Non-Ducted)	W	2200
Rated Power Input (Mixed)	W	2200
Min.-Max. Power Input (Ducted)	W	1950-3931
Min.-Max. Power Input (Non-Ducted)	W	1300-4500
Min.-Max. Power Input (Mixed)	W	1810-3452
Capacity @ 17°F Rated /Max (Ducted)	BTU/H	18200/27950
Capacity @ 17°F Rated /Max (Non-Ducted)	BTU/H	17600/27000
Capacity @ 17°F Rated /Max (Mixed)	BTU/H	18000/28525
Capacity @ 5°F Rated (Max) (Ducted)	BTU/H	26400
Capacity @ 5°F Rated (Max) (Non-Ducted)	BTU/H	27000
Capacity @ 5°F Rated (Max) (Mixed)	BTU/H	26600
Capacity @ -13°F Max (Ducted)	BTU/H	17323
Capacity @ -13°F Max (Non-Ducted)	BTU/H	19177
Capacity @ -13°F Max (Mixed)	BTU/H	18250
* Testing Conditions: Indoor: 70°F DB / 60°F WB Outdoor: 47°F DB / 43°F WB		

PIPING and Refrigerant		
Liquid Pipe Size O.D	in (mm)	1/4" (Ø6.35)
Gas Pipe Size O.D	in (mm)	3/8" (Ø9.52)
Maximum Piping Length	ft (m)	230(70)
Maximum Height Difference	ft (m)	49(15)
Refrigerant Type	/	R454B
Refrigerant Pre-charged Amount	oz(kg)	76.2(2.16)
Max. Pre-charged Length(ft/m)	ft (m)	73.82(22.5)
Additional Charge of Refrigerant	oz/ft	0.16
Connection Method [Flared/Braze]	/	Flare

EFFICIENCY (Non- Ducted)		
SEER2	Btu/ (W.h)	23
EER2	Btu/ (W.h)	12.85
HSPF2	Btu/ (W.h)	10
COP @ 47°F	W/W	3.6
COP @ 5°F	W/W	1.82


Standard Operating Range(°F/°C)	
Outdoor Cooling °F (°C)	5 to 125 (-15 to 52)
Outdoor Heating °F (°C)	-13 to 75 (-25 to 24)

ELECTRICAL DATA		
System power supply		
Voltage, Hertz,Phase	V/ph/HZ	208/230V.1Ph.50/60Hz
Available Voltage Range	V	187 - 253
Cooling / Heating Rated Amps (Ducted)	A	10.4/9.8
Cooling / Heating Rated Amps (Non-Ducted)	A	9.3/9.8
Cooling / Heating Rated Amps (Mixed)	A	9.8/9.7
Communication Wiring Size	NO-AWG	4×16
Power cable Size	NO-AWG	3×12
System MCA	A	27
System MOCP	A	30
MCA - Minimum Circuit Ampacity		
MOP - Maximum Overcurrent Protection		

OUTDOOR UNIT SPECIFICATIONS:		
Compressor		
Type	/	ROTARY-INVERTER
Model	/	KKD330XAA21
Brand	/	Panasonic
Capacity	Btu/h	28626
Input	W	2995
Rated current Amps (RLA)	A	18
Refrigerant Oil Type	/	FW50S
Refrigerant Oil Amount	ml	1000
ODU Throttle Type	/	EEV
Outdoor Fan Motor		
Model	/	ZWB4710L18A
Type/Qty	/	DC/1
Motor output	HP	1/3
RLA	A	1.3
Speed	r/min	850
Outdoor Airflow Rate		
Cooling (H)	CFM	3357
	m3/h	5700
Outdoor Sound Pressure Level		
High	dB (A)	62
Fin Type /Tube Type	Hydrophilic aluminium/ Copper	
Coating on Fin	colour ~ hours	GOLD-1500
Net Dimensions (W×D×H)	In	38-3/8×14-1/8 ×32-7/8
	mm	975×360×835
Package (W×D×H)	In	43-3/4x18-1/8x37-3/4
	mm	1110×460×960
Net Weight	Lbs.	160.6
	kg	72.9
Shipping Weight	Lbs.	183.2
	kg	83.1

Outdoor Unit Dimension

Inch (mm)

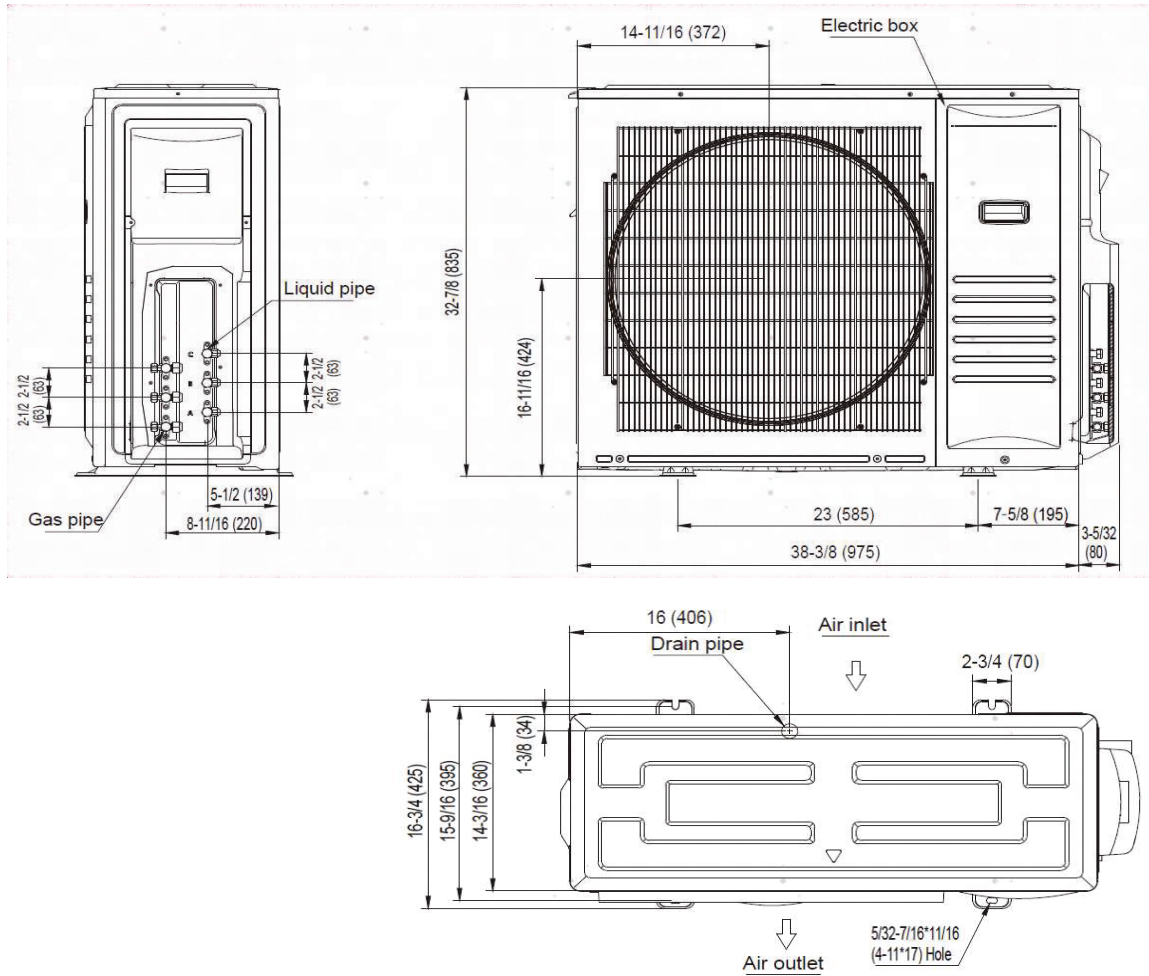

Accessories

Adaptors		
No	Description	Part number
1	9.52 change into 12.7	1493010
2	9.52 change into 15.88	2014749
3	6.35 change into 9.52	2014748

note:if you need extra adaptors ,please purchase separately.



Scan the QR code to explore more
 Warranty*Requires registration - some restrictions apply
 Due to continuous improvements,specifications are subject to change without notice.
 Version:02-02-2026