

Hisense

Hi-MULTI

Horizontal Discharge Heat Pump SEER2 up to 22.00 and HSPF2 up to 9.50

Outdoor Unit Model AMO5-45U3T25U

Job Name:

Location:

Date:

Engineer:

Submitted to:

Submitted by:

Approval:

Construction:

Unit #:

Reference:

Drawing #:

Key Features:

ENERGY STAR qualified 70+% heating at -13°F (-25°C) 18-45k

Xtreme Heat up to 100% Heating at 5°F (5 Zone 86%)

Long connection pipes up to 262ft length, 49ft height

Built-in condenser base pan heater & crank case heater

Low temperature heating down to -13°F (-25°C)

Low temperature cooling down to 5°F (-15°C)


Connected capacity up 130%

Universal IDU compatible

Smart control logic guarantees the R454B refrigerant distribution of each indoor units and balances cooling capacity or heating capacity for each room.

"Hi-Checker" built-in for identification of most errors

Built-in Wi-Fi plus the Connectlife smart app for effortless system control with walmount units

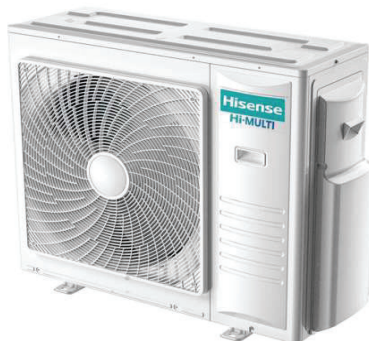

www.HisenseComfort.com

SPECIFICATIONS

AHRI Certificate # Ducted	216472834
AHRI Certificate # Non-Ducted	216472835
AHRI Certificate # - Mixed	216472836
Outdoor Unit	AMO5-45U3T25U

EFFICIENCY (Ducted)		
SEER2	Btu/ (W.h)	18
EER2	Btu/ (W.h)	11.35
HSPF2	Btu/ (W.h)	8.8
COP @ 47°F	W/W	3.45
COP @ 5°F	W/W	1.83

EFFICIENCY (Mixed)		
SEER2	Btu/ (W.h)	20
EER2	Btu/ (W.h)	11.8
HSPF2	Btu/ (W.h)	9.15
COP @ 47°F	W/W	3.53
COP @ 5°F	W/W	1.87

Cooling Performance		
*Rated Capacity (Ducted)	BTU/H	42000
*Rated Capacity (Non-Ducted)	BTU/H	42000
*Rated Capacity (Mixed)	BTU/H	42000
Min.-Max. Capacity (Ducted)	BTU/H	15000-56500
Min.-Max. Capacity (Non-Ducted)	BTU/H	9000-54600
Min.-Max. Capacity (Mixed)	BTU/H	14150-53650
Capacity @ 125°F Max (Ducted)	BTU/H	21100
Capacity @ 125°F Max (Non-Ducted)	BTU/H	24000
Capacity @ 125°F Max (Mixed)	BTU/H	22550
Rated Power Input (Ducted)	W	3500
Rated Power Input (Non-Ducted)	W	3500
Rated Power Input (Mixed)	W	3560
Min.-Max. Power Input (Ducted)	W	1200-6300
Min.-Max. Power Input (Non-Ducted)	W	1200-6300
Min.-Max. Power Input (Mixed)	W	1369-5780
*Testing Conditions:Indoor: 80°F DB / 67°F WB Outdoor: 95°F DB / 75°F WB.		

Heating Performance		
*Rated Capacity (Ducted)	BTU/H	45000
*Rated Capacity (Non-Ducted)	BTU/H	48000
*Rated Capacity (Mixed)	BTU/H	45000
Min.-Max. Capacity (Ducted)	BTU/H	14100-51100
Min.-Max. Capacity (Non-Ducted)	BTU/H	9000-58000
Min.-Max. Capacity (Mixed)	BTU/H	15050-49825
Rated Power Input (Ducted)	W	3910
Rated Power Input (Non-Ducted)	W	3910
Rated Power Input (Mixed)	W	3865
Min.-Max. Power Input (Ducted)	W	1950-5400
Min.-Max. Power Input (Non-Ducted)	W	2100-5400
Min.-Max. Power Input (Mixed)	W	2300-5245
Capacity @ 17°F Rated /Max (Ducted)	BTU/H	27400/37550
Capacity @ 17°F Rated /Max (Non-Ducted)	BTU/H	28200/36000
Capacity @ 17°F Rated /Max (Mixed)	BTU/H	27800/36600
Capacity @ 5°F Rated (Max) (Ducted)	BTU/H	34000
Capacity @ 5°F Rated (Max) (Non-Ducted)	BTU/H	36000
Capacity @ 5°F Rated (Max) (Mixed)	BTU/H	35000
Capacity @ -13°F Max (Ducted)	BTU/H	24500
Capacity @ -13°F Max (Non-Ducted)	BTU/H	27250
Capacity @ -13°F Max (Mixed)	BTU/H	25875
* Testing Conditions: Indoor: 70°F DB / 60°F WB Outdoor: 47°F DB / 43°F WB		

PIPING and Refrigerant		
Liquid Pipe Size O.D	in (mm)	1/4" (Ø6.35)
Gas Pipe Size O.D	in (mm)	3/8" (Ø9.52)
Maximum Piping Length	ft (m)	262(80)
Maximum Height Difference	ft (m)	49(15)
Refrigerant Type	/	R454B
Refrigerant Pre-charged Amount	oz(kg)	105.8(3.0)
Max. Pre-charged Length(ft/m)	ft (m)	123.03(37.5)
Additional Charge of Refrigerant	oz/ft	0.16
Connection Method 【 Flared/Braze】	/	Flare

EFFICIENCY (Non- Ducted)		
SEER2	Btu/ (W.h)	22
EER2	Btu/ (W.h)	12
HSPF2	Btu/ (W.h)	9.5
COP @ 47°F	W/W	3.6
COP @ 5°F	W/W	1.92


Standard Operating Range(°F/°C)	
Outdoor Cooling °F (°C)	5 to 125 (-15 to 52)
Outdoor Heating °F (°C)	-13 to 75 (-25 to 24)

ELECTRICAL DATA		
System power supply		
Voltage, Hertz,Phase	V/ph/HZ	208/230V1Ph.50/60Hz
Available Voltage Range	V	187 - 253
Cooling / Heating Rated Amps (Ducted)	A	16.4/16.9
Cooling / Heating Rated Amps (Non-Ducted)	A	15.5/17.4
Cooling / Heating Rated Amps (Mixed)	A	15.8/17.2
Communication Wiring Size	NO-AWG	4×16
Power cable Size	NO-AWG	3×8
System MCA	A	37
System MOCP	A	40
MCA - Minimum Circuit Ampacity		
MOP - Maximum Overcurrent Protection		

OUTDOOR UNIT SPECIFICATIONS:		
Compressor		
Type	/	ROTARY-INVERTER
Model	/	C-7RZ420H1CAF
Brand	/	CRSS
Capacity	Btu/h	41524
Input	W	3800
Rated current_Amps (RLA)	A	14.6
Refrigerant Oil Type	/	FV68S
Refrigerant Oil Amount	ml	1200
ODU Throttle Type	/	EEV
Outdoor Fan Motor		
Model	/	ZWB4710L18A
Type/Qty	/	DC/1
Motor output	HP	1/3
RLA		1.3
Speed	r/min	830
Outdoor Airflow Rate		
Cooling (H)	CFM	3357
	m3/h	5700
Outdoor Sound Pressure Level		
High	dB (A)	64
Fin Type /Tube Type	Hydrophilic aluminium/ Copper	
Coating on Fin	colour ~ hours	GOLD~1500
Net Dimensions (W×D×H)	In	38- 3/8×14- 1/8 ×32- 7/8
	mm	975×360×835
Package (W×D×H)	In	43- 3/4x18- 1/8x37- 3/4
	mm	1110×460×960
Net Weight	Lbs.	172
	kg	78
Shipping Weight	Lbs.	194
	kg	88

Outdoor Unit Dimension

Inch (mm)

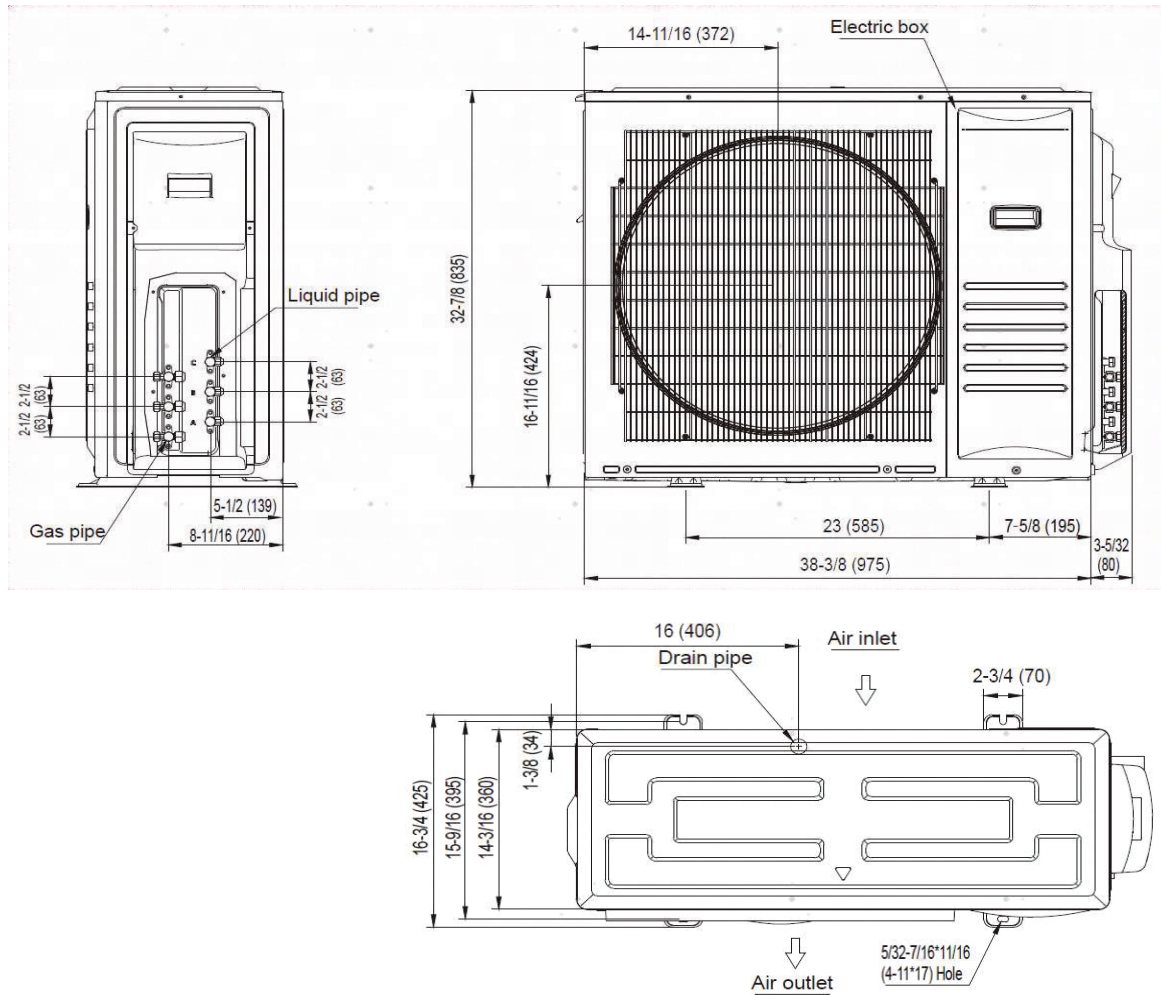

Accessories

Adaptors		
No	Description	Part number
1	9.52 change into 12.7	1493010
2	9.52 change into 15.88	2014749
3	6.35 change into 9.52	2014748

note:if you need extra adaptors ,please purchase separately.



Scan the QR code to explore more
 Warranty*Requires registration - some restrictions apply
 Due to continuous improvements,specifications are subject to change without notice.
 Version:02-02-2026