



Submittal Data Sheet


Daikin AURORA 2.0-Ton, 3-Port, Heat Pump, Ductless Outdoor Unit
3MXT24AVJU8

FEATURES

- AURORA gives Enhanced Capacity in cooling and heating
- High-efficiency inverter driven swing compressor
- Cooling Operating Limit (14°~114.8°F/-10°~46°C)
- Heating Operating Limit (-13°~60°F/-25°~15.6°C)
- Anti-corrosion treatment of outdoor heat exchanger
- Specialized drain pan design for improved cold climate drainage
- Pre Charged to 131.6ft (40 m)
- (3 or 4 or 5) Zone enhanced Capacity Multi-Zone
- Night Quiet Mode
- Automatic Defrost
- Quick Warming Function
- Automatic Defrosting
- Priority Room Setting
- Cool/Heat mode lock
- Unit performs self diagnosis and indicates results using LED lights
- Wiring error check function
- (H models) Built In Drain Pan Heater
- PAM Control

BENEFITS

- 12 Year limited parts warranty with online registration
- 5 Year limited parts warranty for commercial applications
- High efficiency cooling and heating operation provides utility bill savings
- Multiple indoor unit style options available
- Cold Climate Energy Star Rated

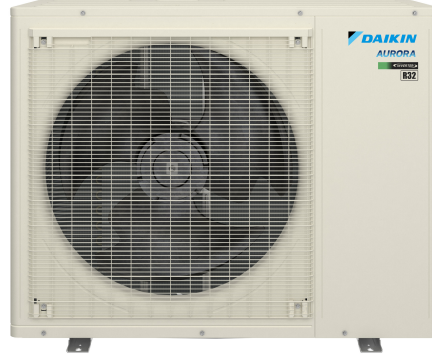



Submittal Data Sheet

Daikin AURORA 2.0-Ton, 3-Port, Heat Pump, Ductless Outdoor Unit
3MXT24AVJU8

EFFICIENCY					PERFORMANCE	
	SEER2	EER2	HSPF2	COP	COOLING:	HEATING:
Non-Ducted:	19.00	12.50	9.50	1.90	Rated (Btu/hr): 23,000	Rated (Btu/hr): 23,700
Ducted:	16.00	11.00	8.30	1.80	Operating Range: 14°F - 115°F	Operating Range: -14°F - 60°F
Mixed:	17.50	11.75	8.90	1.85	Rated Cooling Conditions:	Rated Heating Conditions:
					Indoor (°F DB/DB): 80 / 67 Ambient (°F DB/WB): 95 / 75	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43

ELECTRICAL			PIPING		
Power Supply (V/Hz/Ph): *See Engineering Manuals for other voltages.		*208-230 / 60 / 1	Max. System Piping Length: (feet):	230	Gas Conn. (inch): 3/8
System MCA: (Min.circuit amps)		33.6	Max. Interunit Piping Length: (feet):	230	Liquid Conn. (inch): 1/4
System MFA: (Max.fuse amps)		35.0	Max. Height Difference IDU to ODU (feet):	49.25	Drain Conn. (inch): 1
Compressor RLA: (Rated load amps)			Max. Height Difference IDU to IDU (feet):	24.6	
Outdoor fan motor FLA: (Full load amps)			Refrigerant Pre-Charged Pipe Length (ft):	131.25	
Outdoor fan motor W: (Rated output watts)					


SPECIFICATIONS			
Compressor Type:	Swing	Compressor Stage:	Inverter
Refrigerant Type:	R-32	Refrigerant Oil:	FW68DE
Factory Charge (Lbs):	6.94	Additional Refrigerant Charge (Ozs/ft):	0.22
COOLING - Airflow Rate (cfm):		HEATING - Airflow Rate (cfm):	
High:	3,137	High:	3,137
Med:		Med:	
Low:		Low:	
Sound Level (dBA):	55	Sound Level (dBA):	57
Dimensions (HxWxD) (in):	34-1/4 x 43-5/16 x 18-1/8	Net Weight (lb):	213

Submittal Data Sheet

Daikin AURORA 2.0-Ton, 3-Port, Heat Pump, Ductless Outdoor Unit

3MXT24AVJU8

DIMENSIONAL DRAWING

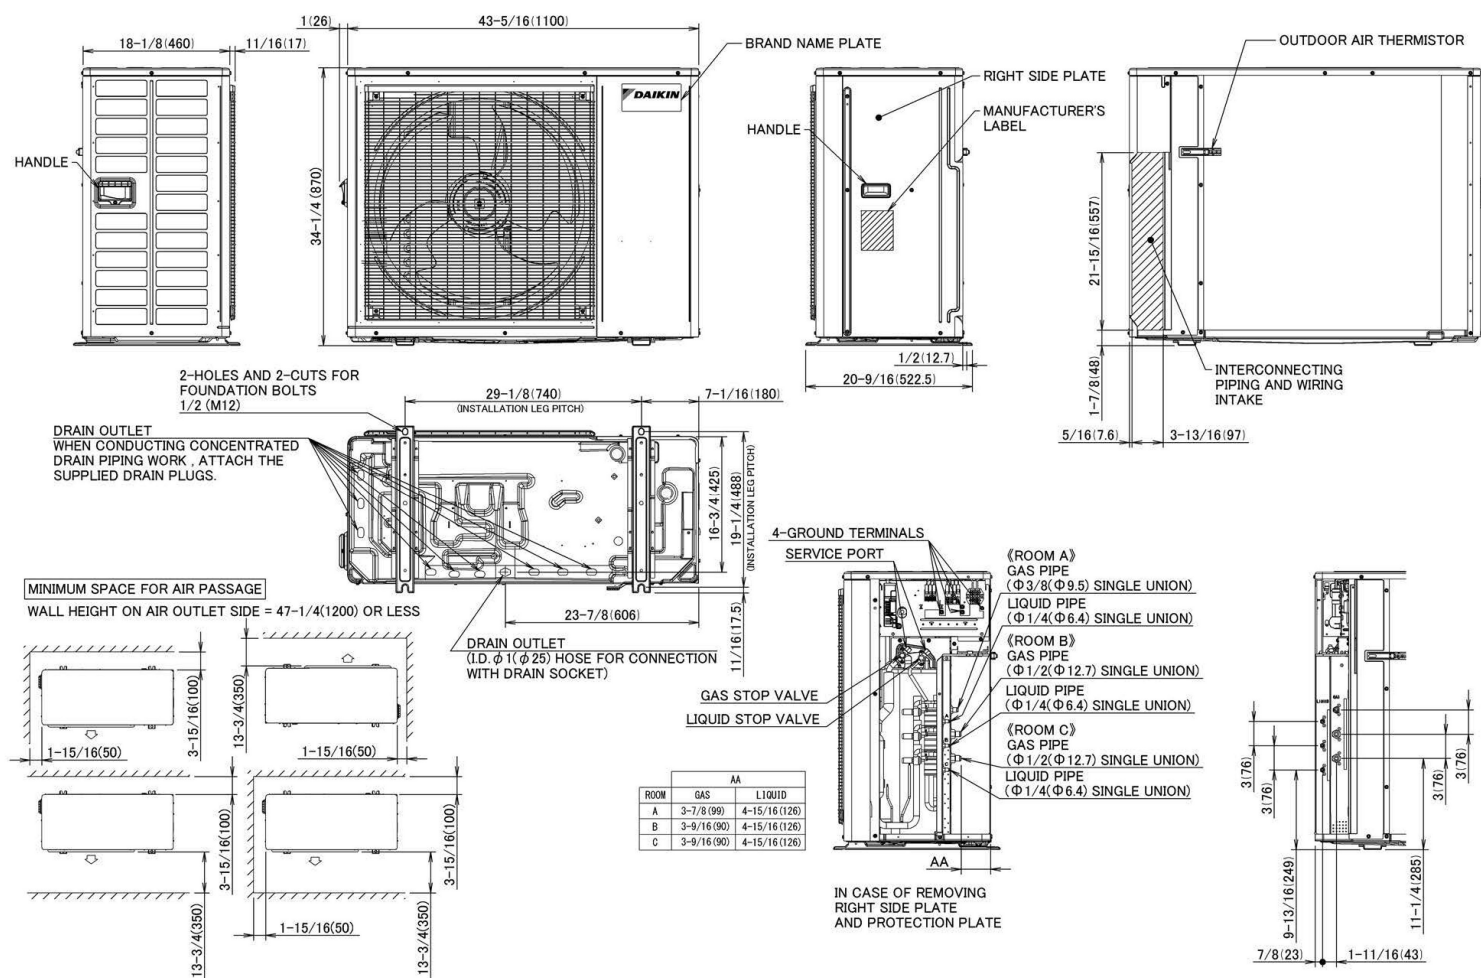



Submittal Data Sheet

Daikin AURORA 2.0-Ton, 3-Port, Heat Pump, Ductless Outdoor Unit
3MXT24AVJU8

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
BKP082A41	Drain Plug Kit	No
KEH082A41A	Daikin TBM Drain Pan Heater 3MXT, 4MXT, 5MXT, 5MXM, 3MXTH, 4MXTH, 5MXTH	No
KKG082A41	Back protection wire net 4MXL, 5 MXS	No
KPW082A41	Air direction adjustment grille	No