



## Submittal Data Sheet


Daikin AURORA 3.3-Ton, 5-Port, Heat Pump, Ductless Outdoor Unit  
5MXT40AVJU8

### FEATURES

- AURORA gives Enhanced Capacity in cooling and heating
- High-efficiency inverter driven swing compressor
- Cooling Operating Limit (14°~114.8°F/-10°~46°C)
- Heating Operating Limit (-13°~60°F/-25°~15.6°C)
- Anti-corrosion treatment of outdoor heat exchanger
- Specialized drain pan design for improved cold climate drainage
- Pre Charged to 131.6ft (40 m)
- (3 or 4 or 5) Zone enhanced Capacity Multi-Zone
- Night Quiet Mode
- Automatic Defrost
- Quick Warming Function
- Automatic Defrosting
- Priority Room Setting
- Cool/Heat mode lock
- Unit performs self diagnosis and indicates results using LED lights
- Wiring error check function
- (H models) Built In Drain Pan Heater
- PAM Control

### BENEFITS

- 12 Year limited parts warranty with online registration
- 5 Year limited parts warranty for commercial applications
- High efficiency cooling and heating operation provides utility bill savings
- Multiple indoor unit style options available
- Cold Climate Energy Star Rated

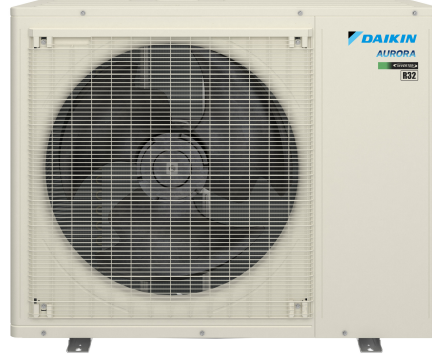



## Submittal Data Sheet

Daikin AURORA 3.3-Ton, 5-Port, Heat Pump, Ductless Outdoor Unit  
5MXT40AVJU8

| EFFICIENCY  |       |       |       |      | PERFORMANCE                                               |                                                           |
|-------------|-------|-------|-------|------|-----------------------------------------------------------|-----------------------------------------------------------|
|             | SEER2 | EER2  | HSPF2 | COP  | COOLING:                                                  | HEATING:                                                  |
| Non-Ducted: | 20.00 | 11.70 | 9.50  | 1.90 | Rated (Btu/hr): 40,000                                    | Rated (Btu/hr): 40,000                                    |
| Ducted:     | 15.90 | 8.50  | 8.20  | 1.80 | Operating Range: 14°F - 115°F                             | Operating Range: -14°F - 60°F                             |
| Mixed:      | 17.95 | 10.10 | 8.85  | 1.85 | Rated Cooling Conditions:                                 | Rated Heating Conditions:                                 |
|             |       |       |       |      | Indoor (°F DB/DB): 80 / 67<br>Ambient (°F DB/WB): 95 / 75 | Indoor (°F DB/WB): 70 / 60<br>Ambient (°F DB/WB): 47 / 43 |

| ELECTRICAL                                                              |  |                   | PIPING                                       |        |                             |
|-------------------------------------------------------------------------|--|-------------------|----------------------------------------------|--------|-----------------------------|
| Power Supply (V/Hz/Ph):<br>*See Engineering Manuals for other voltages. |  | *208-230 / 60 / 1 | Max. System Piping Length:<br>(feet):        | 262    | Gas Conn.<br>(inch): 3/8    |
| System MCA:<br>(Min.circuit amps)                                       |  | 37.9              | Max. Interunit Piping<br>Length: (feet):     | 262    | Liquid Conn.<br>(inch): 1/4 |
| System MFA:<br>(Max.fuse amps)                                          |  | 40.0              | Max. Height Difference<br>IDU to ODU (feet): | 49.25  | Drain Conn.<br>(inch): 1    |
| Compressor RLA:<br>(Rated load amps)                                    |  |                   | Max. Height Difference<br>IDU to IDU (feet): | 24.6   |                             |
| Outdoor fan motor FLA:<br>(Full load amps)                              |  |                   | Refrigerant Pre-Charged<br>Pipe Length (ft): | 131.25 |                             |
| Outdoor fan motor W:<br>(Rated output watts)                            |  |                   |                                              |        |                             |


| SPECIFICATIONS                |                           |                                            |          |
|-------------------------------|---------------------------|--------------------------------------------|----------|
| Compressor Type:              | Swing                     | Compressor Stage:                          | Inverter |
| Refrigerant Type:             | R-32                      | Refrigerant Oil:                           | FW68DE   |
| Factory Charge (Lbs):         | 6.94                      | Additional Refrigerant Charge<br>(Ozs/ft): | 0.22     |
| COOLING - Airflow Rate (cfm): |                           | HEATING - Airflow Rate (cfm):              |          |
| High:                         | 3,137                     | High:                                      | 3,137    |
| Med:                          |                           | Med:                                       |          |
| Low:                          |                           | Low:                                       |          |
| Sound Level (dBA):            | 55                        | Sound Level (dBA):                         | 57       |
| Dimensions (HxWxD) (in):      | 34-1/4 x 43-5/16 x 18-1/8 | Net Weight (lb):                           | 219      |

## Submittal Data Sheet

### Daikin AURORA 3.3-Ton, 5-Port, Heat Pump, Ductless Outdoor Unit

5MXT40AVJU8

## DIMENSIONAL DRAWING

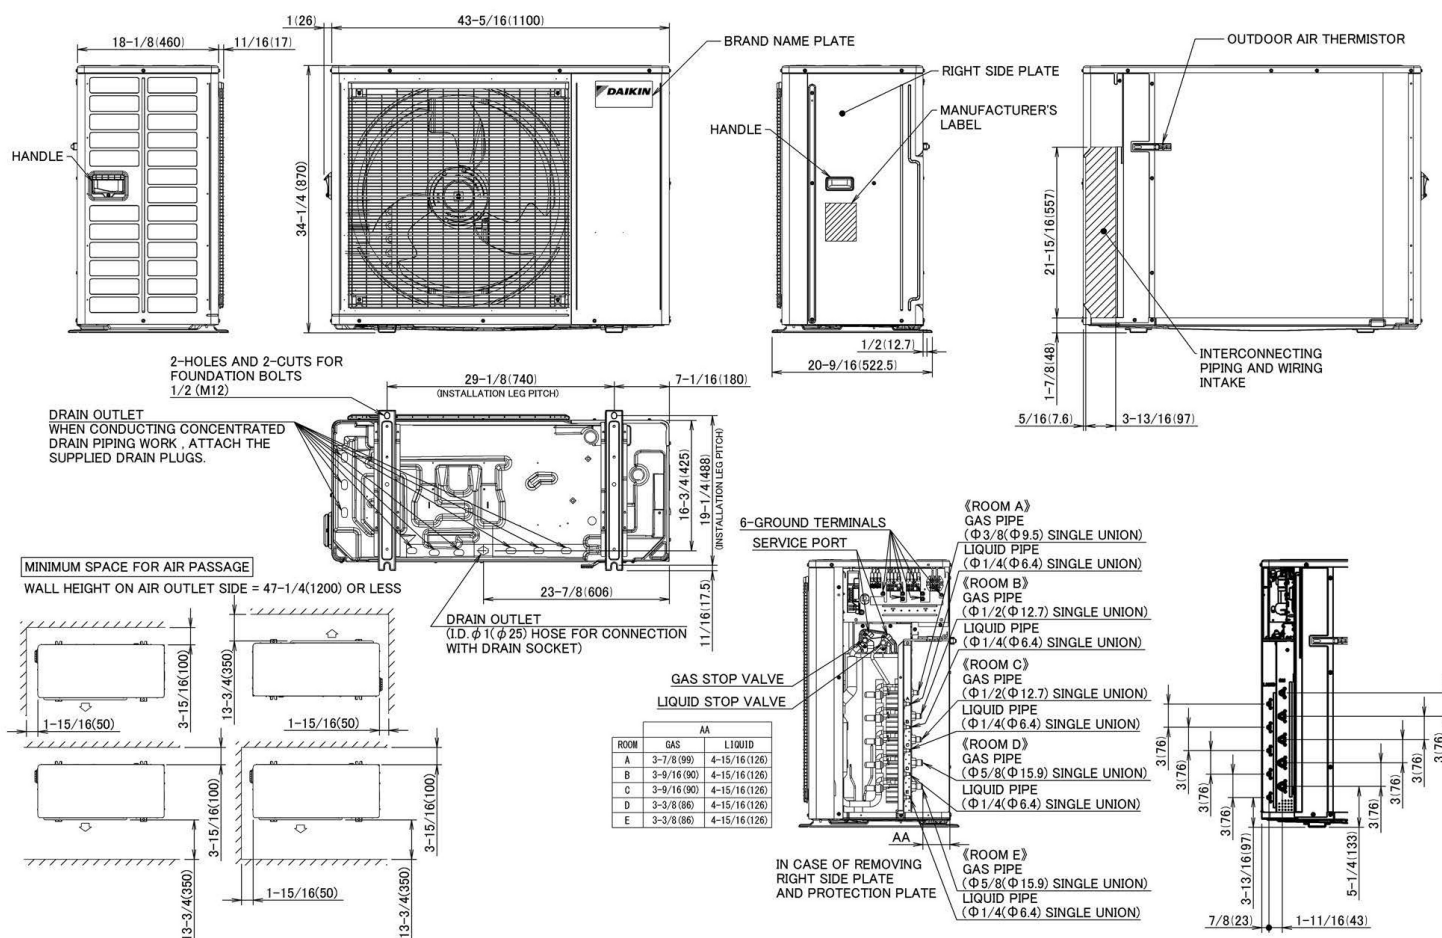



Submittal Data Sheet

Daikin AURORA 3.3-Ton, 5-Port, Heat Pump, Ductless Outdoor Unit  
5MXT40AVJU8

ACCESSORIES

| PART NUMBER | DESCRIPTION                                                             | INCLUDED |
|-------------|-------------------------------------------------------------------------|----------|
| BKP082A41   | Drain Plug Kit                                                          | Yes      |
| KEH082A41A  | Daikin TBM Drain Pan Heater 3MXT, 4MXT, 5MXT, 5MXM, 3MXTH, 4MXTH, 5MXTH | No       |
| KKG082A41   | Back protection wire net 4MXL, 5 MXS                                    | No       |
| KPW082A41   | Air direction adjustment grille                                         | No       |