

Hisense SmartSense

Inverter Heat Pump SEER2 19.50 and HSPF2 9.00
24,000 BTU/H Cooling Capacity and 24,000 BTU/H Heating Capacity

Indoor Unit Model	AS-24U3RHC26SS	Outdoor Unit Model	AO-24U3R26SS
Job Name:	Location:	Date:	
Engineer:	Submitted to:	Submitted by:	
Approval:	Construction:	Unit #:	
Reference:	Drawing #:		

Equipment Features:

OUTDOOR UNIT

- * **Efficiency and comfort:** Up to 19.5 SEER2 / 10.62 EER2 / 9.0 HSPF2
- * **Low Ambient Performance:** Confirmed continuous operation as allow as 5°F (-15°C) ambient temperature.
- * **R32 EPA Low-GWP Refrigerant**
- * **Blue Fin Anti-Corrosion Heat Exchanger**, Max 1,000-hour salt-spray tested for extended life and increase performance.
- * Outdoor **Intelligent defrosting** tech improves system efficiency and reliable operation




INDOOR UNIT

- * **Quick and easy installation** with mounting bracket and detachable IDU base plate.
- * Blue Fin **Anti-Corrosion Heat Exchanger**, Max 1,000-hour salt-spray tested for extended life and increase performance.
- * **4-Way Air Flow** for optimized comfort.
- * Easily accessible and washable **High Definition Filter** for improved air quality and maintenance.
- * Self-cleaning indoor with Hisense **FrostClean™ technology** to reduces dust and bacteria for a healthier home
- * **Whisper-Quiet Operation** with noise level as low as 28dB.
- * **"I Feel" Mode** to control the temperature user location/remote vs indoor unit.
- * **Display Dimmer** turns off the both displays to eliminate lighting at night
- * **Child-Safe Finger Guards** to protect small hands from indoor fan.



RCH-RTY5-0



Certifications



Controller Options

Model No :HS-WC01U/HS-WC02U
 Hisense 12V Smart Thermostat



Warranty* Requires registration-some restrictions apply

UP TO 8 YEAR PARTS



Scan the QR code to explore more

product improvements, specifications are subject to change without notice.
 # Please log in to the www.HisenseComfort.com/Hi-Tech APP for the most up-to-date

Version: 20260214



www.HisenseComfort.com

SPECIFICATIONS

AHRI Certificate #	218083342	
Indoor Unit	AS-24U3RHC26SS	
Outdoor Unit	AO-24U3R26SS	
Efficiency and Performance		
SEER2	Btu/ (W.h)	19.5
EER2	Btu/ (W.h)	10.6
HSPF2	Btu/ (W.h)	9
COP @ 5°F	W/W	1.9

Cooling Performance @ 95°F		
Rated Capacity	BTU/H	24000
Min.-Max. Capacity	BTU/H	8000~25000
Rated Power Input	W	2270
Min.-Max. Power Input	W	550-2450
Moisture Remova	Pints/h	3.5
Sensible Heat Factor	/	78
Power Factor [208V / 230V]	%	0.99

Heating Performance		
Heating @ 47°F Rated Capacity	BTU/H	24000
Heating @ 47°F Min.-Max. Capacity	BTU/H	8000~25000
Heating @ 47°F Rated Power Input	W	2130
Heating @ 47°F Min.-Max. Power Input	W	500-2340
Power Factor [208V / 230V]	%	99
Heating @ 17°F Rated Capacity	BTU/H	20800
Heating @ 17°F Max Capacity	BTU/H	21500
Heating @ 5°F Max Capacity	BTU/H	18200
Heating @ -4°F Rated Capacity	BTU/H	/
Heating @ -13°F Rated Capacity	BTU/H	/

Cooling Nominal Test Conditions: Indoor: 80°F DB / 67°F WB Outdoor: 95°F DB / 75°F WB.

Heating Nominal Test Conditions: Indoor: 70°F DB / 60°F WB Outdoor: 47°F DB / 43°F WB

Standard Operating Range (°F/°C)	
Remote Control Adjustable Temp.Range-Cooling	"61 to 86 (16 to 30)
Remote Control Adjustable Temp.Range-Heating	"61 to 86 (16 to 30)
Outdoor Cooling	"5 to 118 (-15 to 48)
Outdoor Heating	"5 to 75 (-15 to 24)

The system has low-temperature cutout. Capacity is not tested outside of the rated temperature range.

Electrical Data		
System power supply		
Voltage, Hertz, Phase	V AC	208/230V, 60Hz, 1Ph
Available Voltage Range	V AC	187~253
Rated Current Load [Cooling - Heating]	(A)	10.0 - 9.5
Power Supply IDU	Powered by the Outdoor Unit	
Communication Wiring Size AWG	4×18	
Power Cable Size AWG	Outdoor 3×12	
Recommended Fuse/Breaker Size (Outdoor)	(A)	25
Short-Circuit Current Rating [SCCR]	KA	/

Outdoor Piping and Refrigerant		
Liquid Pipe Size O.D. 【 Flared】	In. (mm)	Ø3/8 (Ø9.5)
Gas Pipe Size O.D. 【 Flared】	In. (mm)	Ø5/8 (Ø15.8)
Maximum Piping Length	Ft. (m)	98.43(30)
Maximum Height Difference	Ft. (m)	49.21(15)
Refrigerant Type	/	R32
Pre-Charged Refrigerant Amount	oz(kg)	47.66 (1.35)
Max. Pre-Charged Piping Length	Ft. (m)	25(7.6)
Additional Refrigerant Charge Per Additional Piping Length	(oz/ft). (g/m)	0.32 (30)

Indoor Unit Specifications		
MCA	A	3
MCA - Minimum Circuit Ampacity MOP - Maximum Overcurrent Protection		
Indoor fan motor		
Model	/	KD09060452
Type	/	DC Motor
Motor Output	W	45
Full Load Amperage	A	0.42
Indoor Fan Airflow Rated		
Cooling (U-H-M-L-S)	CFM	706/647/500/441/412
	m3/h	1200/1100/950/750/700
Indoor Sound Pressure Level		
Cooling (U-H-M-L-S)	dB (A)	49/47/39/38/33
Others		
Drain Pipe Size	In. [mm]	Φ3/4 Φ(19)-O.D
Fin Type /Tube Type	Hydrophilic Aluminum / Copper	
Coating on Heat Exchanger	Type ~ Hours	Blue~1000
Dimensions		
Unit Dimensions (W×D×H)	In	42 1/16 ×12 5/8 ×9 1/16
	mm	1069×320×230
Package Dimensions (W×D×H)	In	45 1/2 ×15 3/8 ×12 3/16
	mm	1155×390×310
Indoor Net Weight	Lbs. (kg)	28.7 [13]
Indoor Package Weight	Lbs. (kg)	34.2 [15.5]

Outdoor Unit Specifications		
MCA	A	21
MOCP	A	25
Compressor		
Type	/	Inverter Twin ROTARY-LANDA
Capacity	Btu/h	25590
Input	W	1830
Rated Current Amps (RLA)	A	16
Compressor Oil Type/Amount	ml(oz.)	ESTER OIL VG74~18.94/560
ODU Refrigerant Control	Type	EEV
Outdoor Fan Motor		
Model	/	ZW511A800002
Type/Qty	/	DC/1
Motor Output	W	60
Full load amps (FLA)	A	0.76
Outdoor Fan Airflow Rate		
Cooling (H)	CFM	1882
	m3/h	3200
Outdoor Fan Speed		
Cooling (H)	r/min	880
Outdoor Sound Pressure Level		
Cooling (H)	dB (A)	60
Others		
Fin Type /Tube Type	Hydrophilic Aluminum / Copper	
Coating on Heat Exchanger	Type ~ Hours	Blue~1000
Base Pan Heater	NO	
Crankcase Heater	NO	
Dimensions		
Unit Dimensions (W×H×D)	In	33 7/8×25 1/2×12 1/6
	mm	860×650×310
Package Dimensions (W×H×D)	In	39 3/16×28 3/8×16 1/2
	mm	995×720×420
Outdoor Net Weight	Lbs. (kg)	103.6 [47]
Package Weight	Lbs. (kg)	111.3 [50]


Version: 20260214

Specifications are subject to change without notice

www.HisenseComfort.com

Indoor Unit Dimension

Unit: in.(mm)

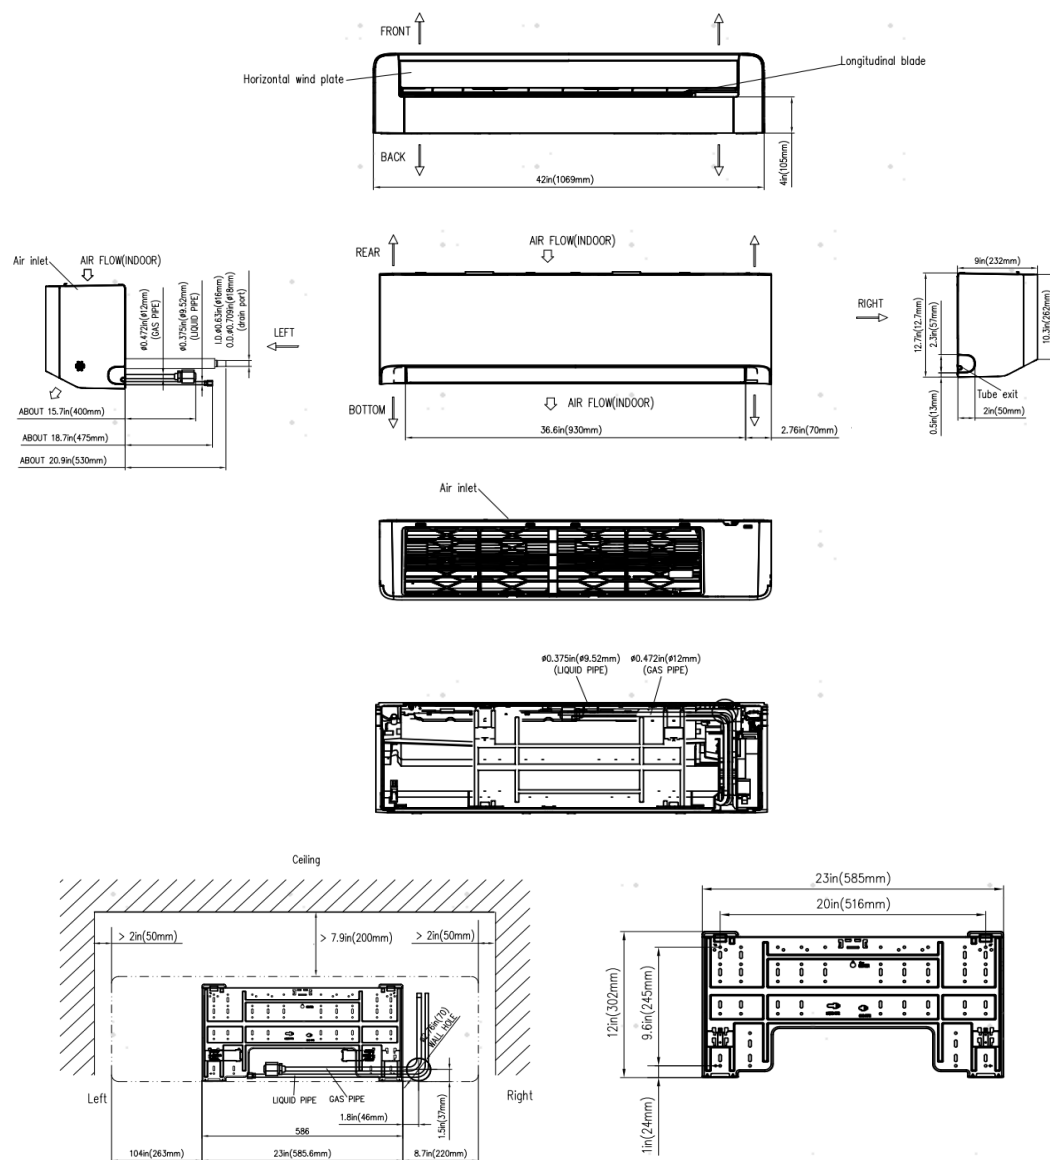


Note: Liquid Pipe Size and Gas Pipe Size are subject to the Specifications
Version: 20260214
Specifications are subject to change without notice

www.HisenseComfort.com

Outdoor Unit Dimension


Unit: in.(mm)

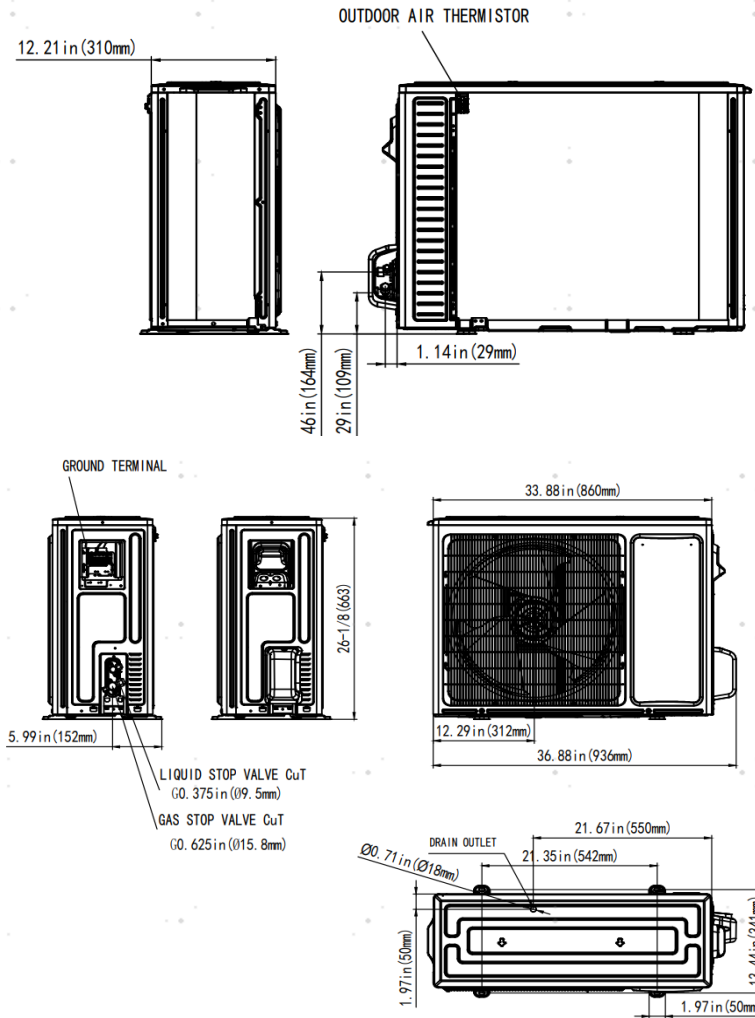

Version: 20260214
Specifications are subject to change without notice

www.HisenseComfort.com

WIRELESS REMOTE CONTROLLER

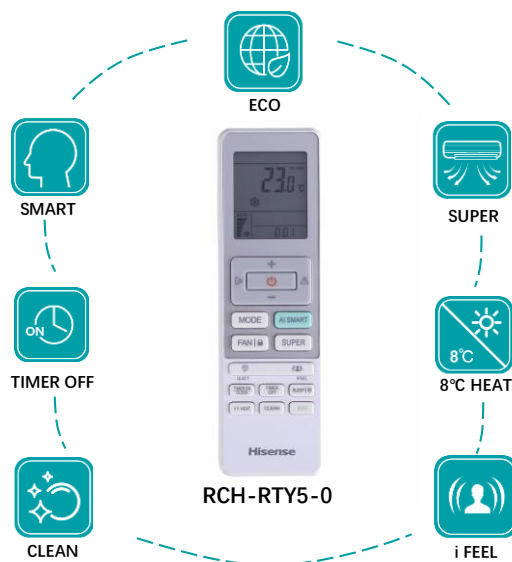

Button Description

	Press this button to select the operation mode
MODE	
	Used to adjust the set temperature and the timer, also real time
TEMP +/-	
	Used to adjust vertical adjustment louver swinging and set the desired up/down airflow direction
SWING	
	Used to adjust the swing of the horizontal louver and set the left/right airflow direction
SWING	
	Used to start or stop the fast cooling/heating (Fast cooling operates at high fan speed with 60°F (16°C) set temp automatically. Fast heating operates at auto fan speed with 80°F (30°C) set temp automatically)
SUPER	
	Used to select fan speed in sequence: auto, higher, high, medium, low, lower. Press this button for 5 seconds to activate LOCK mode; press it again for 5 seconds to deactivate the mode.
FAN/LOCK	
	Used to set or cancel I FEEL Mode. In I FEEL mode the Air Conditioner operates basis temperature sensor fitted in remote instead of machine. Advice to use I FEEL mode end the remote put where the indoor unit receives signal easily
i FEEL	
	Used to set the Clean operation
CLEAN	
	Used to start Smart Running Mode. Smart Mode automatically selects the appropriate operating mode—Cooling, Dry, Fan Only, or Heating
SMART	

Version: 20260214

Specifications are subject to change without notice

www.HisenseComfort.com

OPTIONAL WIRING CONTROLLER



Large **LCD Display** for EZ read and control

HS-WC01U
HS-WC02U



24h Real Timer and **Weekly Timer** setting



Eliminate the feeling of being cold
Reduce power consumption



❖ **Signal receiver** of Remote Control – **only HS-WC01U**

❖ **Central Controller** for Max. 16 units - **only HS-WC01T**

Button Description

1. ON/OFF BUTTON

The appliance will be started or stopped when this button is pressed.

2. RUN INDICATOR

Indicates that the appliance is on.

3. MODE BUTTON

Press this button to select the operation mode.

4. FAN BUTTON

Used to select fan speed in sequence high-auto-low-medium-high.

5. SWING BUTTON

Used to stop or start the adjustment louver swinging and set the desired airflow direction.

6. TIMER/CLOCK BUTTON

Used to set the current time or set timer on/off.

7. SLEEP BUTTON

Used to set or cancel Sleep Mode operation.

8. ENTER BUTTON

Used to confirm settings.

9. CANCEL BUTTON

Used to cancel settings.

10. ADD. FUNC. BUTTON

Used to set filter clean, hot water, fresh air, electric heater, etc.

11. INCREASE SETTING BUTTON

Used to raise the set temperature;

It raise the values when setting.

12. DECREASE SETTING BUTTON

Used to lower the set temperature;

It lower the values when setting.

13. LIQUID CRYSTAL DISPLAY(LCD) SCREEN

Used to display indicator screens.

14. BUILT-IN INFRARED SIGNAL RECEIVER

Used to receive infrared signal.

Version: 20260214

Specifications are subject to change without notice

www.HisenseComfort.com