



Submittal Data Sheet

Daikin 1-Ton, Ducted Concealed Indoor Unit

FDMA12AVJU9

FEATURES

- Auto Fan Speed
- 3-Step Switchable Fan speed
- Quick Warming function
- Program dry operation
- Fan-only mode
- ECONO operation
- Titanium Apatite deodorizing filter
- Filter Cleaning Indicator
- Auto Restart after Power failure
- Built in refrigeration detection system
- Operation Range—Cooling (50°F - 114.8°F)
- Low temperature cooling operation down to -4°F (-20°C) with wind baffle and field settings
- Operating Range - Heating (-13.8°F - 64.4°F)
- 12-year limited parts and compressor warranty with online registration
- 5-year limited parts warranty for commercial applications



BENEFITS

- Inverter and PAM control technologies optimize energy use, delivering efficient performance and reduced electricity consumption
- Concealed systems preserve interior aesthetics by eliminating bulky wall-mounted unit ideal for minimalist and design-focused homes
- Concealed ducted mini splits offer zoned comfort with minimal ductwork, preserving the architectural integrity of historic homes
- Concealed ducted systems efficiently condition large or multi-room spaces using flexible ductwork, offering seamless comfort without multiple wall units
- Compact concealed systems deliver efficient, quiet comfort in small apartments without occupying valuable walls or floor space
- Concealed systems maintain visual harmony by delivering discreet comfort without distracting from high-end displays or artwork.
- Concealed systems deliver efficient climate control while preserving a clean, professional look free from exposed HVAC components
- Concealed ducted mini-splits offer a space-saving, energy-efficient solution for individual climate control in apartments and condominiums
- Concealed systems provide quiet, zoned climate control with advanced filtration—ideal for maintaining comfort and air quality in hospitals and hotels



Submittal Data Sheet

Daikin 1-Ton, Ducted Concealed Indoor Unit
FDMA12AVJU9

ELECTRICAL		PIPING	
Power Supply (V/Hz/Ph): *See Engineering Manuals for other voltages.		Gas Connection: (inch)	3/8
		Liquid Connection: (inch)	1/4
		Drain Connection: (inch)	1


SPECIFICATIONS			
COOLING - Airflow Rate (cfm):		COOLING - Sound Level (dBA):	
High:	440	High:	33
Med:	367	Med:	
Low:	299	Low:	
SuperLow:		SuperLow:	
HEATING - Airflow Rate (cfm):		HEATING - Sound Level (dBA):	
High:	440	High:	33
Med:	367	Med:	
Low:	299	Low:	
SuperLow:		SuperLow:	
Dimensions (HxWxD) (in):		Net Weight (lb):	64

Submittal Data Sheet

Daikin 1-Ton, Ducted Concealed Indoor Unit

FDMA12AVJU9

DIMENSIONAL DRAWING

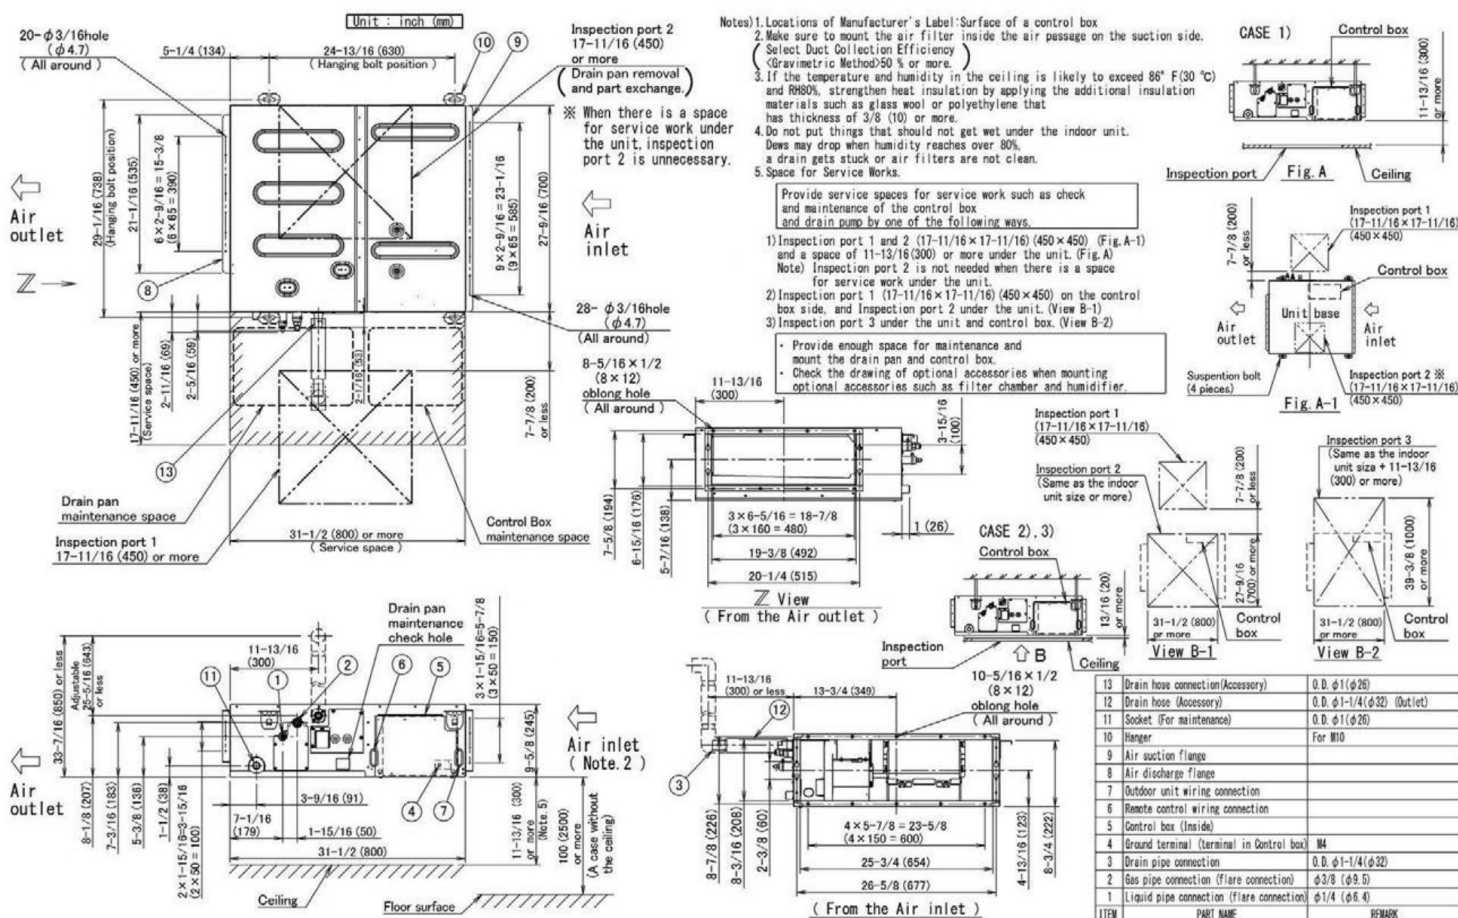

13	Drain hose connection(Accessory)	O.D. $\phi 1(\phi 2)$
12	Drain hose (Accessory)	O.D. $\phi 1-1/4(\phi 32)$ (Outlet)
11	Socket (For maintenance)	O.D. $\phi 1(\phi 2)$
10	Hanger	For M10
9	Air suction flange	
8	Air discharge flange	
7	Outdoor unit wiring connection	
6	Remote control wiring connection	
5	Control box (Inside)	
4	Ground terminal (terminal in Control box)	M4
3	Drain pipe connection	O.D. $\phi 1-1/4(\phi 32)$
2	Gas pipe connection (Flare connection)	$\phi 3/8(\phi 9.5)$
1	Liquid pipe connection (Flare connection)	$\phi 1/4(\phi 6.4)$
ITEM	PART NAME	REMARK



Submittal Data Sheet
Daikin 1-Ton, Ducted Concealed Indoor Unit
FDMA12AVJU9

ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
AZAI6WSPDKC	DKN Plus Interface	No
BRC1NRV71	R32 Navigation Remote Controller	No
DCS302C71	Centralized Controller	No
DST301BA61	Schedule Timer	No
DTST-CWBSA-NI-B	Daikin One + Smart Thermostat	No
DTST-TOU-A	Daikin One Touch Smart Thermostat	No
KRCS01-6B	Remote Sensor	No
KRP1C76	Wiring Adapter PCB	No