



Submittal Data Sheet

Daikin AURORA 0.75-Ton Wall Mount Heat Pump System

FTXV09AVJU9-RXT09AVJU9

FEATURES

- Hot start technology
- Auto-restart (after power failure)
- R/C with back light
- Swing compressor
- Wide-angle Louvers (vertical blades)
- Auto Swing (Up and Down)
- Comfort Airflow Operation
- Auto and Switchable fan speed
- Indoor unit Quiet operation
- Automatic Defrosting
- Automatic Cooling/heating change-over
- Program dry operation
- POWERFUL operation (inverter)
- ECONO operation
- Titanium apatite deodorizing filter
- Count up-down ON/OFF timer
- Night set mode

BENEFITS

- Built in Wi-Fi
- Quiet operation
- Low ambient cooling operation down to -4°F (-20°C) with field setting and air adjustment grille
- Operating Range - Cooling (50°F - 114.8°F)
- Operating Range - Heating (-13°F - 64.4°F)
- 12 year limited parts and compressor warranty with online registration
- 5 year limited parts warranty for commercial applications
- Pre-charged for line-sets to 49ft
- 100% heating at 5F
- Easy access to fan motor and removable drain pan

INDOOR UNIT



OUTDOOR UNIT





Submittal Data Sheet

Daikin AURORA 0.75-Ton Wall Mount Heat Pump System
FTXV09AVJU9-RXT09AVJU9

SYSTEM PERFORMANCE

Indoor Unit Model No.	FTXV09AVJU9	Indoor Unit Name:	Daikin 0.75-Ton, Heat Pump, Ductless Indoor Unit
Outdoor Unit Model No.	RXT09AVJU9	Outdoor Unit Name:	Daikin AURORA 0.75-Ton, Heat Pump, Ductless Outdoor Unit
Rated Cooling Capacity (Btu/hr):	9,000	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Sensible Capacity (Btu/hr):	8,250	Rated Piping Length(ft):	25
Max/Min Cooling Capacity (Btu/hr):	11,200 / 4,400	Rated Height Difference (ft):	0.00
Cooling Input Power (kW):	0.970	Heating Input Power (kW):	1.50
SEER2 (Non-Ducted/Ducted):	21.00 /	HSPF2 (Non-Ducted/Ducted):	10.2 /
EER2 (Non-Ducted/Ducted):	12.20 /		
Rated Heating Capacity (Btu/hr):	10,900	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Max/Min Heating Capacity (Btu/hr):	16,000 / 4,400		

SYSTEM DETAILS

Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	50 - 115
Holding Refrigerant Charge (lbs):	1.65 Lbs	Heating Operation Range (°F WB):	-13 - 60
Additional Charge (oz/ft):	0.22	Max. Pipe Length (Vertical) (ft):	49
Pre-charge Piping (Length) (ft):	49	Cooling Range w/Baffle (°F DB):	-4 -
Max. Pipe Length (Total) (ft):	66		
Max Height Separation (Ind to Ind ft):	0		
Fan/Compressor Drive Input:	0.15		

Submittal Data Sheet


Daikin AURORA 0.75-Ton Wall Mount Heat Pump System

FTXV09AVJU9-RXT09AVJU9


INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Airflow Rate (H/M/L/SL) (CFM):	381/272/230/166
Power Supply Connections:	L1, L2, L3, G	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):		Gas Pipe Connection (inch):	3/8
Max Overcurrent Protection (MOP) (A):		Liquid Pipe Connection (inch):	1/4
Dimensions (HxWxD) (in):	11-1/4 x 30-5/16 x 8-3/4	Condensate Connection (inch):	5/8
Ext. Static Pressure (Rated/Max) (inWg):	/	Sound Pressure (H/M/L/SL) (dBA):	43/35/31/24
Net Weight (lb):	19	Sound Power Level (dBA):	


DIMENSIONAL DRAWING - INDOOR UNIT

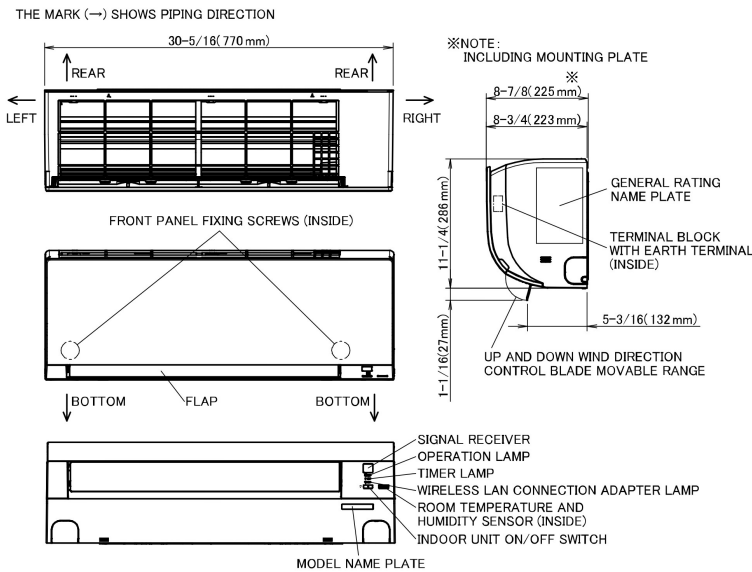


REQUIRED SPACE

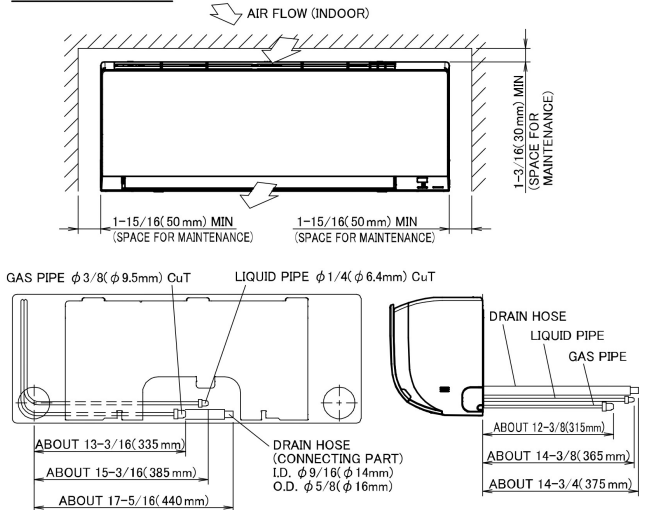


WIRELESS REMOTE CONTROLLER (ARC480A83)



BLADE ANGLE

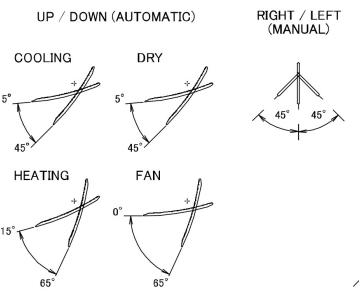

STANDARD LOCATIONS OF WALL HOLES

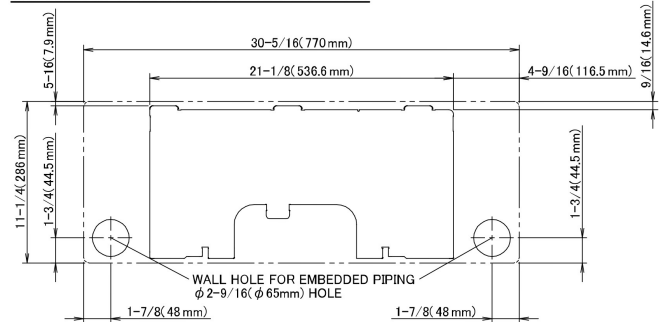




Submittal Data Sheet

Daikin AURORA 0.75-Ton Wall Mount Heat Pump System
FTXV09AVJU9-RXT09AVJU9

OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Compressor Stage:	Inverter
Power Supply Connections:	L1, L2, L3, G	Capacity Control Range (%):	-
Min. Circuit Amps MCA (A):	11.6	Airflow Rate (H) (CFM):	1088
Max Overcurrent Protection (MOP) (A):	15	Gas Pipe Connection (inch):	3/8
Max Starting Current MSC(A):		Liquid Pipe Connection (inch):	1/4
Rated Load Amps RLA(A):		Sound Pressure (H) (dBA):	49
Dimensions (HxWxD) (in):	21-15/16 x 26-9/16 x 11-3/16	Sound Power Level (dBA):	
Net Weight (lb):	63		

DIMENSIONAL DRAWING - OUTDOOR UNIT

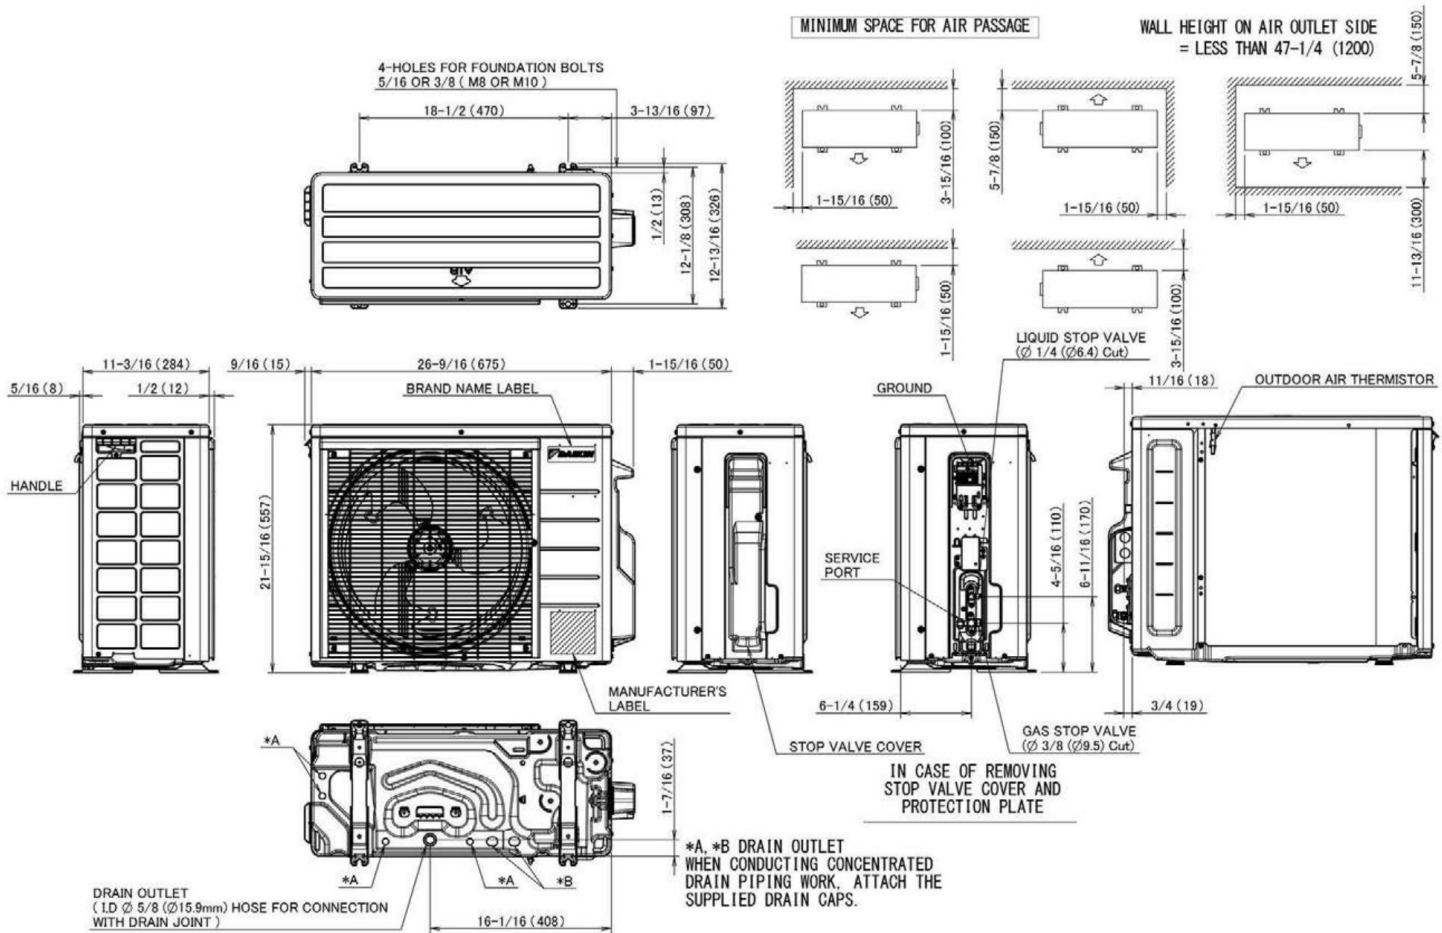



Submittal Data Sheet

Daikin AURORA 0.75-Ton Wall Mount Heat Pump System

FTXV09AVJU9-RXT09AVJU9

INDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
-------------	-------------	----------

AZAI6WSCDKB	DKN Residential Cloud Wi-Fi Adaptor for Single- and Multi-Zone System (S21)	No
AZAI6WSPDKC	DKN Plus Interface	No
BRC073A6	Wired Remote Controller (Requires Additional Wire Harness)	No
BRC944B2	Wired Remote Controller	No
BRCW901A03	BRC944B2 CONTROL CABLE, 10FT	No
BRCW901A08	Wired Remote Controller Cord - 8m/26ft	No
DACA-CP1-1	Mini Aqua Condensate Pump	No
KAF970A46	Titanium apatite photocatalytic air-purifying filter WITHOUT frame	No
KRP067A41	Adaptor for wired controller	No
KRP067A41E	Adaptor for wired remote controller	No
KRP928BB2S	RA Interface Adaptor for DIII-Net -	No

OUTDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
-------------	-------------	----------

DACA-WB-3	Powder-Coated Wall-Mounted Bracket	No
KEH068A41	Drain Pan Heater	No
KKG067A41	Back protection wire net (09 & 12)	No
KPS067A41	Snow hood (intake side plate) (09 & 12)	No
KPS067A42	Snow hood (intake rear plate) (09 & 12)	No
KPS067A44	Snow hood (outlet) (09 & 12)	No
KPW937F4	Air direction adjustment grille (09 & 12)	No