



## Submittal Data Sheet

VISTA R-32 0.75 Ton 2 X 2 Ceiling Cassette

FFA09AVJU9

### FEATURES

- AUTO mode with automatic cooling/heating selection based on indoor temperature
- COOL / HEAT / DRY / FAN operating modes
- Configurable airflow pattern (2, 3, or 4-way discharge)
- Indoor airflow direction adjustable via remote control (field setting)
- Built-in drain pump with float switch safety control
- Air filter cleaning indicator with adjustable intervals
- COOL/HEAT mode lock function (field programmable)
- Auto-restart function after power interruption
- Automatic system protection (voltage fluctuation, compressor delay, defrost cycle)
- Quiet and continuous airflow operation with indoor air circulation
- Ceiling-mounted cassette design with compact installation footprint
- R32 refrigerant system for improved efficiency and environmental compliance
- Flexible installation with suspension mounting and configurable piping/wiring

### BENEFITS

- Customized airflow and temperature distribution for enhanced occupant comfort
- Reliable and consistent performance with intelligent auto mode, restart capability, and system protection features
- Improved indoor air quality & maintenance convenience with filter cleaning alerts and easy service access
- Reduced downtime and long-term reliability through built-in drain pump, safety mechanisms, and protection controls
- Energy-efficient and eco-friendly operation using R32 refrigerant technology
- Easy installation and adaptability for various ceiling applications and room configuration.





**Submittal Data Sheet**  
VISTA R-32 0.75 Ton 2 X 2 Ceiling Cassette  
FFA09AVJU9

| ELECTRICAL              |  | PIPING                    |  |
|-------------------------|--|---------------------------|--|
| Power Supply (V/Hz/Ph): |  | Gas Connection: (inch)    |  |
| / 60 /                  |  | 3/8                       |  |
|                         |  | Liquid Connection: (inch) |  |
|                         |  | 1/4                       |  |
|                         |  | Drain Connection: (inch)  |  |
|                         |  | 1-1/32                    |  |

| SPECIFICATIONS                |     |                              |    |
|-------------------------------|-----|------------------------------|----|
| COOLING - Airflow Rate (cfm): |     | COOLING - Sound Level (dBA): |    |
| High:                         | 378 | High:                        | 38 |
| Med:                          | 339 | Med:                         | 35 |
| Low:                          | 268 | Low:                         | 29 |
| SuperLow:                     |     | SuperLow:                    |    |
| HEATING - Airflow Rate (cfm): |     | HEATING - Sound Level (dBA): |    |
| High:                         | 399 | High:                        | 38 |
| Med:                          | 357 | Med:                         | 35 |
| Low:                          | 282 | Low:                         | 29 |
| SuperLow:                     |     | SuperLow:                    |    |
| Dimensions (HxWxD) (in):      |     | Net Weight (lb):             |    |
| 10-1/4 x 22-5/8 x 22-5/8      |     | 36                           |    |

## Submittal Data Sheet

### VISTA R-32 0.75 Ton 2 X 2 Ceiling Cassette


FFA09AVJU9

## DIMENSIONAL DRAWING

• DECORATION PANEL

UNIT:inch(mm)

|             |                  |
|-------------|------------------|
| BYFQ60C3W2W | FRESH WHITE N9.5 |
|-------------|------------------|

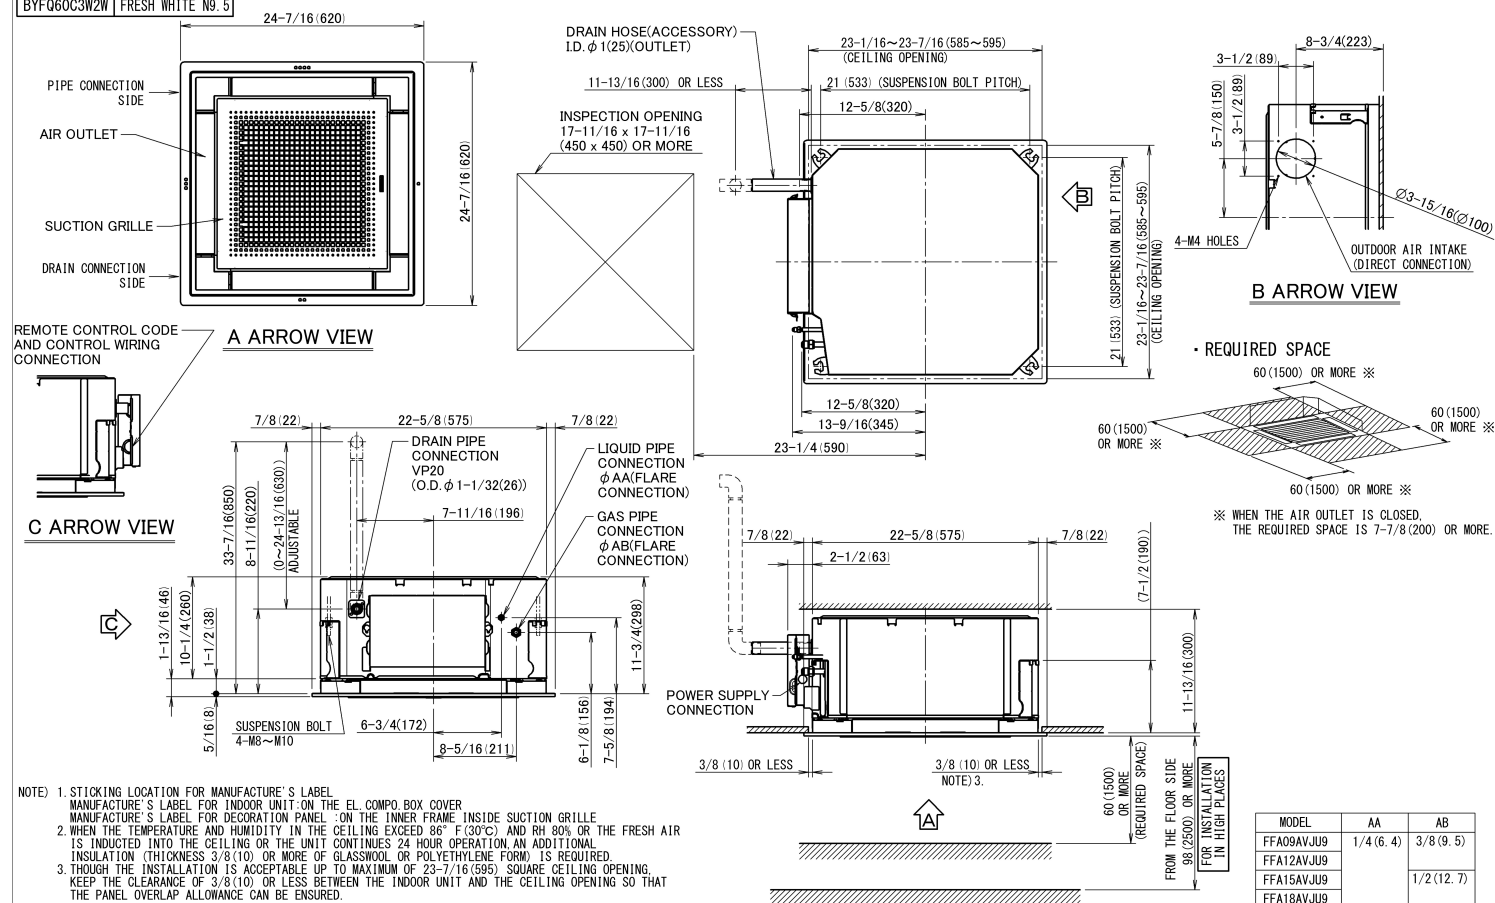

NOTE) 1. STICKING LOCATION FOR MANUFACTURE'S LABEL  
MANUFACTURE'S LABEL FOR INDOOR UNIT: ON THE EL. COMPO. BOX COVER  
MANUFACTURE'S LABEL FOR DECORATION PANEL : ON THE INNER FRAME INSIDE SUCTION GRILLE

2. WHEN THE TEMPERATURE AND HUMIDITY IN THE CEILING EXCEED 86° F (30°C) AND RH 80% OR THE FRESH AIR IS INDUCTED INTO THE CEILING OR THE UNIT CONTINUES 24 HOUR OPERATION, AN ADDITIONAL INSULATION (THICKNESS 3/8(10) OR MORE OF GLASSWOOL OR POLYETHYLENE FORM) IS REQUIRED.

3. THOUGH THE INSTALLATION IS ACCEPTABLE UP TO A MAXIMUM OF 23-7/16(595) SQUARE CEILING OPENING, KEEP THE CLEARANCE LESS 2-9/16(50) BETWEEN THE INDOOR UNIT AND THE CEILING OPENING SO THAT THE PANEL OVERLAP ALLOWANCE CAN BE ENSURED.

| MODEL      | AA         | AB          |
|------------|------------|-------------|
| FFA09AVJU9 | 1/4 (6. 4) | 3/8 (9. 5)  |
| FFA12AVJU9 |            |             |
| FFA15AVJU9 |            | 1/2 (12. 7) |
| FFA18AVJU9 |            |             |



**Submittal Data Sheet**  
VISTA R-32 0.75 Ton 2 X 2 Ceiling Cassette  
FFA09AVJU9

ACCESSORIES

| PART NUMBER | DESCRIPTION                                                                           | INCLUDED |
|-------------|---------------------------------------------------------------------------------------|----------|
| BDBHQ44C60  | Air Discharge Sealing Memeber                                                         | No       |
| BRC1NRV71   | R32 Navigation Remote Controller                                                      | No       |
| BRYQ60AAW   | Sensor Kit                                                                            | No       |
| BYFQ60C3W2W | VISTA Decoration Panel                                                                | No       |
| DCS302C71   | Centralized Controller                                                                | No       |
| DST301BA61  | Schedule Timer                                                                        | No       |
| KAF441C60   | Replacement Long Life Filter                                                          | No       |
| KDDQ44XA60  | Fresh Air Intake Kit (Duct Flange)                                                    | No       |
| KRCS01-6B   | Remote Sensor                                                                         | No       |
| KRP1C77     | Wiring Adapter PCB                                                                    | No       |
| KRP4A74     | Group Control Adaptor PCB (Installation box for adaptor PCB "KRP1BB101" is necessary) | No       |