



## Universal IDU - Concealed Ducted

Job Name: Location: Date:  
Engineer: Submitted to: Submitted by:  
Approval: Construction: Unit #:  
Reference: Drawing #:

### Key Features:


- \* **Integrated Wi-Fi** plus the Connectlife smart app ,put easy operation right at your fingertips.
- \* **Ultra-Slim Cabinet**-9K and 12K ducted units feature a cabinet height of 7.48 inches for low-clearance ceiling installations
- \* **Build in A2L Safety Sensor** - Ensures safety for both homeowners and technicians
- \* **External static pressure** is adjustable via wired controller with 1 Pa increment for precise airflow matching
- \* **Built-in Condensate Pump**: Unit includes an internal condensate pump with a maximum lift of 47 inches
- \* Self-cleaning indoor with **Hisense FrostClean™ technology** to reduces dust and bacteria for a healthier home
- \* **Selectable Air Return**-Unit supports rear or bottom air return configurations to accommodate various installation layouts
- \* **Drain Safety Protection**-A float switch monitors condensate level and shuts down the unit in the event of pump failure or drain blockage
- \* **Temperature Compensation Function** -can be configured via controller to maintain comfort in high-ceiling applications




### SPECIFICATIONS

| Model Name                      |                           |              | ADU-09U3T25U         | ADU-12U3T25U          | ADU-18U3T25U         | ADU-24U3T25U        |
|---------------------------------|---------------------------|--------------|----------------------|-----------------------|----------------------|---------------------|
| Box code                        |                           |              | F2E                  | F2E                   | F3M                  | F4M                 |
| Capacity                        | Cooling capacity          | Btu/h        | 9000                 | 12000                 | 18000                | 24000               |
|                                 | Heating capacity          | Btu/h        | 9000                 | 12000                 | 18000                | 24000               |
| Electrical Data                 | Power                     | V/Hz/f       | 208/230 50/60 1      | 208/230 50/60 1       | 208/230 50/60 1      | 208/230 50/60 1     |
|                                 | Rated current             | A            | 0.4                  | 0.4                   | 0.95                 | 1.45                |
|                                 | Anti electric shock       | /            | Class I              | Class I               | Class I              | Class I             |
|                                 | Degrees of protection     | /            | IPX0                 | IPX0                  | IPX0                 | IPX0                |
| Fan Motor                       | Model                     | /            | TWZ65-S01            | TWZ65-S01             | ZWF-100H             | ZWF-210H            |
|                                 | Type/Qty                  | /            | DC/1                 | DC/1                  | DC/1                 | DC/1                |
|                                 | Output                    | HP           | 1/20                 | 1/20                  | 1/8                  | 2/7                 |
|                                 | Speed(H/M/L)              | r/min        | 1110/1000/800        | 1110/1000/800         | 920/820/720          | 1400/1250/1100      |
| Air flow (H/M/L)                |                           | CFM          | 324/294/235          | 324/294/235           | 530/471/412          | 735/647/559         |
| ESP                             |                           | in-H2O       | 0-0.2                | 0-0.2                 | 0-0.56               | 0-0.6               |
| Noise Level (Sound Pressure Hi) |                           | dB(A)        | 57                   | 57                    | 54                   | 54                  |
| Dimension                       | Net Dimension (WxHxD)     | inch         | 35-7/8 ×7-1/2×17-5/8 | 35-7/8 ×7-1/2×17-5/8  | 31-1/2×9-5/8×27-1/2  | 47-1/4×9-5/8×27-1/2 |
|                                 | Package Dimension (WxHxD) | inch         | 42-1/2×11-1/4×22-1/4 | 42-1/2 ×11-1/4×22-1/4 | 38-5/8×12-3/8×31-7/8 | 51×12-3/8×32-5/8    |
| Weight                          | Net Weight                | lbs          | 44.1                 | 44.1                  | 58.4                 | 73.9                |
|                                 | Gross Weight              | lbs          | 51.8                 | 51.8                  | 68.3                 | 84.9                |
| Pipe Size                       | Diameter(Liquid)          | inch         | 1/4                  | 1/4                   | 1/4                  | 3/8                 |
|                                 | Diameter(Gas)             | inch         | 3/8                  | 3/8                   | 1/2                  | 5/8                 |
| Loading capacity                |                           | 20'140'140HQ | 160/352/396          | 160/352/396           | 98/196/224           | 77/161/184          |

## 9/12K

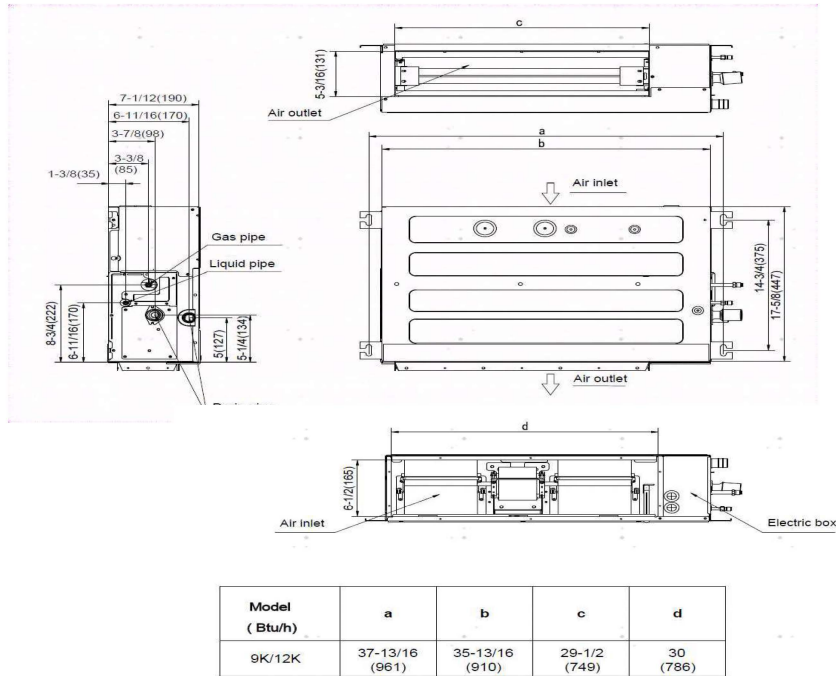


## 18/24K

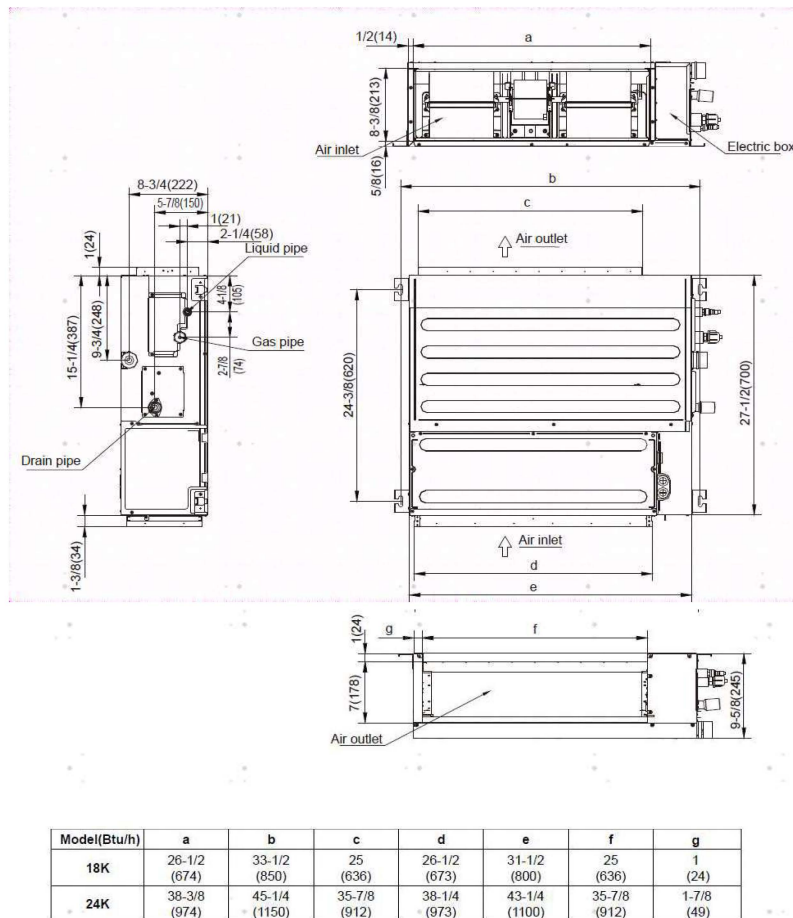

## Accessories

| Controller |                                                      |          |
|------------|------------------------------------------------------|----------|
| RCH-RTY5-0 | Remote Controller                                    | optional |
| HS-WC01U   | Wired Controller (built-in infrared signal receiver) | optional |
| HS-WC02U   | Wired Controller                                     | standard |
| HS-WC01T   | Central controller (Hisense IDU only)                | optional |

## REMOTE CONTROLLER

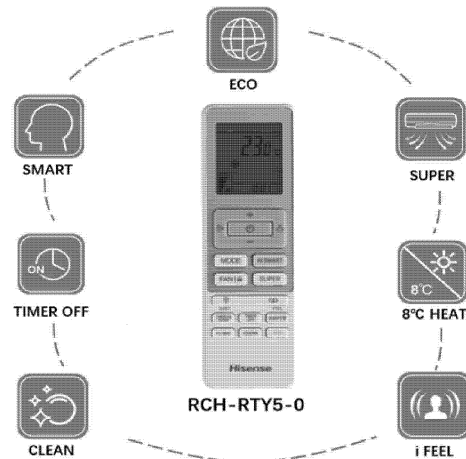

### Button Description

|  |                                                                                                                                                                                                                                        |
|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | Press this button to select the operation mode                                                                                                                                                                                         |
|  | Used to adjust the set temperature and the timer, also real time                                                                                                                                                                       |
|  | Used to adjust vertical adjustment louver swinging and set the desired up/down airflow direction                                                                                                                                       |
|  | Used to adjust the swing of the horizontal louver and set the left/right airflow direction                                                                                                                                             |
|  | Used to start or stop the fast cooling/heating (Fast cooling operates at high fan speed with 60°F (16°C) set temp automatically. Fast heating operates at auto fan speed with 80°F (30°C) set temp automatically)                      |
|  | Used to select fan speed in sequence: auto, higher, high, medium, low, lower. Press this button for 5 seconds to activate LOCK mode; press it again for 5 seconds to deactivate the mode                                               |
|  | Used to set or cancel I FEEL Mode. In I FEEL mode the Air Conditioner operates basis temperature sensor fitted in remote instead of machine. Advice to use I FEEL mode and the remote put where the indoor unit receives signal easily |
|  | Used to set the Clean operation                                                                                                                                                                                                        |
|  | Used to start Smart Running Mode. Smart Mode automatically selects the appropriate operating mode—Cooling, Dry, Fan Only, or Heating                                                                                                   |

## WIRED CONTROLLER



Large **LCD Display** for EZ read and control



24h Real Timer and **Weekly Timer** setting



Eliminate the feeling of being cold  
Reduce power consumption

HS-WC01U  
HS-WC02U



❖ **Signal receiver** of Remote Control – **only HS-WC01U**

❖ **Central Controller** for Max. 16 units - **only HS-WC01T**

### Button Description

#### 1. ON/OFF BUTTON

The appliance will be started or stopped when this button is pressed.

#### 2. RUN INDICATOR

Indicates that the appliance is on.

#### 3. MODE BUTTON

Press this button to select the operation mode.

#### 4. FAN BUTTON

Used to select fan speed in sequence high-auto-low-medium-high.

#### 5. SWING BUTTON

Used to stop or start the adjustment louver swinging and set the desired airflow direction.

#### 6. TIMER/CLOCK BUTTON

Used to set the current time or set timer on/off.

#### 7. SLEEP BUTTON

Used to set or cancel Sleep Mode operation.

#### 8. ENTER BUTTON

Used to confirm settings.

#### 9. CANCEL BUTTON

Used to cancel settings.

#### 10. ADD. FUNC. BUTTON

Used to set filter clean, hot water, fresh air, electric heater, etc.

#### 11. INCREASE SETTING BUTTON

Used to raise the set temperature;

It raise the values when setting.

#### 12. DECREASE SETTING BUTTON

Used to lower the set temperature;

It lower the values when setting.

#### 13. LIQUID CRYSTAL DISPLAY(LCD) SCREEN

Used to display indicator screens.

#### 14. BUILT-IN INFRARED SIGNAL RECEIVER

Used to receive infrared signal.