

# Hisense Hi Edge Heat Pump 20.00 SEER2 and 8.40 HSPF2


**Hisense**

## Submittal Data:

**AO-36U3R25E & AO-36U3R26E2 Heat Pump and AS-36U3RHB25E Wall-Mounted IDU**  
**34,600 BTU/H Cooling Capacity and 35,000 BTU/H Heating Capacity**  
**R32 Refrigerant System - Low GWP EPA Compliant Product**

|                |  |               |                                                                                                                                          |
|----------------|--|---------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Job Name:      |  | Location:     |                                                                                                                                          |
| Purchaser:     |  | Date:         | Engineer:                                                                                                                                |
| Submitted to:  |  | Submitted by: |                                                                                                                                          |
| Other / Notes: |  |               | FOR: <input type="checkbox"/> File <input type="checkbox"/> Resubmit<br><input type="checkbox"/> Approval <input type="checkbox"/> Other |

## Equipment Features:



AS-36U3RHB25E



RCH-RTY5-0



ODU Appearance

Feature Release : AO-36U3R26E2

Currently Available : AO-36U3R25E

### Outdoor Unit

- \* **Efficiency and comfort:** Up to 20 SEER2 / 9.4 EER2 / 8.4 HSPF2
- \* **Low Ambient Performance:** Confirmed continuous operation down to -4°F (-20°C) ambient temperature.
- \* **Low-GWP R32 EPA Refrigerant**
- \* **Base Pan Electric Heater** installed for stable operation in extreme conditions.
- \* **BLUE Fin Anti-Corrosion Heat Exchanger** and Insect-Proof electronics box design for long-lasting reliability.
- \* **Outdoor Intelligent defrosting tech** improves system efficiency and reliable operation.

### Indoor Unit

- \* **Quick and easy installation** with mounting bracket and detachable IDU base plate.
- \* **Integrated Wi-Fi with ConnectLife™ app** for convenient control.
- \* **Built-in A2L Safety Sensor** – Ensures safety for both homeowners and technicians.
- \* **Blue-Fin Anti-Corrosion Heat Exchanger**, 1,000-hour salt-spray tested for extended life and increase performance.
- \* **4-Way Air Flow** for optimized comfort.
- \* Easily accessible and washable **High Definition Filter** for improved air quality and maintenance.
- \* **Self-cleaning indoor unit with Hisense FrostClean™ technology**, reducing dust and bacteria for a healthier home.
- \* **Whisper-Quiet Operation** with noise level as low as 28 dB(A).
- \* **"I Feel" Mode** allows temperature control based on the remote location instead of the indoor unit.
- \* **Display Dimmer** turns off both displays to eliminate lighting at night.
- \* **Child-Safe Finger Guards** to protect small hands from indoor fan.
- \* Contact your local Hisense Partner for complete list of accessories

|                          |                            |               |        |
|--------------------------|----------------------------|---------------|--------|
| Cooling at 95°F (35°C)   | Maximum Capacity           | Btu/h         | 36,000 |
|                          | Rated Capacity             | Btu/h         | 34,600 |
|                          | Minimum Capacity           | Btu/h         | 9,300  |
|                          | Maximum Power Input        | W             | 3800   |
|                          | Rated Power Input          | W             | 3660   |
|                          | Moisture Removal           | Pints/h ~ L/h | 8.5~4  |
|                          | Sensible Heat Factor       | multiplier    | 0.75   |
| Heating at 47°F (8.3°C)  | Power Factor (208V / 230V) | %             | 98%    |
|                          | Maximum Capacity           | Btu/h         | 37,500 |
|                          | Rated Capacity             | Btu/h         | 35,000 |
|                          | Maximum Power Input        | W             | 3350   |
|                          | Rated Power Input          | W             | 3160   |
| Heating at 17°F (-8.3°C) | Power Factor (208V / 230V) | %             | 98%    |
|                          | Maximum Capacity           | Btu/h         | 21,900 |
|                          | Rated Capacity             | Btu/h         | 19,200 |
|                          | Maximum Power Input        | W             | 3100   |
|                          | Rated Power Input          | W             | 2250   |

Cooling Nominal Test Conditions: Indoor: 80°F DB / 67°F WB Outdoor: 95°F DB / 75°F WB.

Heating Nominal Test Conditions: Indoor: 70°F DB / 60°F WB Outdoor: 47°F DB / 43°F WB

Heating at 5°F (-15°C)

Version: 20260601

**Submittal Data Continued: AO-36U3R25E & AO-36U3R26E2 Heat Pump and AS-36U3RHB25E Wall Mount IDU**

|                                                                                                         |                                                                             |                         |                                                |
|---------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|-------------------------|------------------------------------------------|
| Heating at 5°F (-15°C)                                                                                  | Maximum Capacity                                                            | Btu/h                   | 20,000                                         |
|                                                                                                         | Maximum Power Input                                                         | W                       | 3000                                           |
| Heating at -4°F (-20°C)                                                                                 | Maximum Capacity                                                            | Btu/h                   | 15,600                                         |
| Heating at -13°F (-25°C)                                                                                | Maximum Capacity                                                            | Btu/h                   | N/A                                            |
| Efficiency                                                                                              | SEER2                                                                       | Information             | 20                                             |
|                                                                                                         | EER2                                                                        | Information             | 9.45                                           |
|                                                                                                         | HSPF2 [IV]                                                                  | Information             | 8.4                                            |
|                                                                                                         | COP at 47°F ~ (8.3°C) Rated Capacity                                        | Information             | 3.25                                           |
|                                                                                                         | COP at 17°F ~ (-8.3°C) Rated Capacity                                       | Information             | 2.50                                           |
|                                                                                                         | COP at 5°F ~ (-15°C) Maximum Capacity                                       | Information             | 1.95                                           |
|                                                                                                         | ENERGY STAR™                                                                | Information             | NO                                             |
| Electrical                                                                                              | Voltage, Phase, Hertz                                                       | Information             | 208V/230V, 1, 60                               |
|                                                                                                         | Required Voltage Range                                                      | V AC                    | 187~253                                        |
|                                                                                                         | Voltage - Indoor IDU                                                        | V AC                    | 208V/230V, 1, 60                               |
|                                                                                                         | Power Supply IDU                                                            | V AC                    | Powered by the Outdoor Unit                    |
|                                                                                                         | MCA-Indoor Unit                                                             | A                       | 3                                              |
|                                                                                                         | MCA-Outdoor Unit                                                            | A                       | 25.8                                           |
|                                                                                                         | MPCP or Recommended Outdoor Fuse \ Breaker Size                             | A                       | Outdoor: 30A                                   |
|                                                                                                         | Recommended Wire Size [Power/ Communication]                                | AWG-#                   | 12-3/ 18-4                                     |
| Indoor Unit                                                                                             | Fan Motor Full Load Amperage                                                | A                       | 0.6                                            |
|                                                                                                         | Fan Motor Type                                                              | Information             | Cross-flow fan/DC//70                          |
|                                                                                                         | Air Flow Rate Cooling (U-H-M-L-S)                                           | m3/h / CFM              | 1800/1730/1500/1210/1100-1059/1018/882/712/647 |
|                                                                                                         | Cooling speed(Super/High/Mid/Low)                                           | r/min                   | 1100/1060/930/810                              |
|                                                                                                         | Heating speed(Super/High/Mid/Low)                                           | r/min                   | 1100/1060/930/810                              |
|                                                                                                         | Sound Pressure Levels Cooling (U-H-M-L-S)                                   | (±1 dB[A]) <sup>3</sup> | 50/48/43/39/36                                 |
|                                                                                                         | Sound Pressure Levels Heating (U-H-M-L-S)                                   | (±1 dB[A]) <sup>3</sup> | 50/48/43/39/36                                 |
|                                                                                                         | Drain Pipe Size                                                             | In. [mm]                | 3/4(19)-O.D                                    |
|                                                                                                         | Coating on Heat Exchanger~Fin Salt Spray Test                               | type ~ hours            | Blue~1000                                      |
|                                                                                                         | Net IDU Weight                                                              | Lbs. ~ kg               | 40.8~18.5                                      |
| Outdoor Unit                                                                                            | Rated Load Amps                                                             | A                       | 0.66                                           |
|                                                                                                         | Fan Motor Type                                                              | Type ~ W                | Propeller fan ~102                             |
|                                                                                                         | Refrigerant Metering Control                                                | Type                    | EEV                                            |
|                                                                                                         | Coating on Heat Exchanger~Fin Salt Spray Test                               | Type ~ Hours            | Blue~1000                                      |
|                                                                                                         | Outdoor air flow (H/M/L)                                                    | m3/h / CFM              | 4100/3400/2700-2412/2000/1529                  |
|                                                                                                         | Sound Pressure Cooling Mode (ISO 3745)                                      | (±1 dB[A]) <sup>3</sup> | 60                                             |
|                                                                                                         | Base Pan Heater                                                             | Feature                 | Included Standard Option                       |
|                                                                                                         | NET ODU Weight                                                              | Lbs. ~ kg               | 121.3 ~ 55                                     |
| Outdoor Unit (Cont.)                                                                                    | Compressor Type and Control                                                 | Type                    | Rotary~INVERTER                                |
|                                                                                                         | Compressor Oil [Type ~ Charge]                                              | PVE ~ oz. / mL          | ESTER OIL VG74~29.42/870                       |
|                                                                                                         | Rated Current Load [Cooling - Heating]                                      | A                       | 16.2 - 13.8                                    |
| Refrigerant Piping and Volume                                                                           | Refrigerant Type (GWP)                                                      | Type                    | R32 (675 GWP)                                  |
|                                                                                                         | Refrigerant Charge in System                                                | oz. / g                 | 72.4/2050                                      |
|                                                                                                         | Pipe Length No Additional Refrigerant                                       | ft. / m                 | 24.61/7.50                                     |
|                                                                                                         | Additional Refrigerant                                                      | oz/ft ~ g/m             | 0.43~ 40                                       |
|                                                                                                         | Minimum Pipe Length~Maximum Pipe Length                                     | ft/m ~ ft/m             | 13.12/4~98.43/30                               |
|                                                                                                         | Maximum Height Difference (ODU to IDU)                                      | ft. / m                 | 49.21 / 15                                     |
|                                                                                                         | Liquid Line                                                                 | in. OD                  | 3/8                                            |
|                                                                                                         | Vapor Line                                                                  | in. OD                  | 5/8                                            |
| Operating Temperature Range                                                                             | Ambient Cooling [ Minimum ~ Maximum]                                        | °F / °C                 | (5~118)/(-15~48)                               |
|                                                                                                         | Ambient Heating [ Minimum ~ Maximum]                                        | °F / °C                 | (-4~75)/(-20~24)                               |
|                                                                                                         | Indoor Cooling [ Minimum ~ Maximum]                                         | °F / °C                 | (61~86)/(16~30)                                |
|                                                                                                         | Indoor Heating [ Minimum ~ Maximum]                                         | °F / °C                 | (61~86)/(16~30)                                |
| # The system has low-temperature cutout. Capacity is not tested outside of the rated temperature range. |                                                                             |                         |                                                |
| Product Warranty                                                                                        | Residential application<br>(requires registration; some restrictions apply) | Information             | 10 Years Parts                                 |
|                                                                                                         |                                                                             | Information             | 1 Year Labor                                   |
|                                                                                                         |                                                                             | Information             | Up to 1 Year Unit Replacement                  |

# Specifications are subject to change without notice

Version: 20260601


## Certifications:



## Indoor Unit Dimensions:

**Hisense**

Unit: inch (mm)

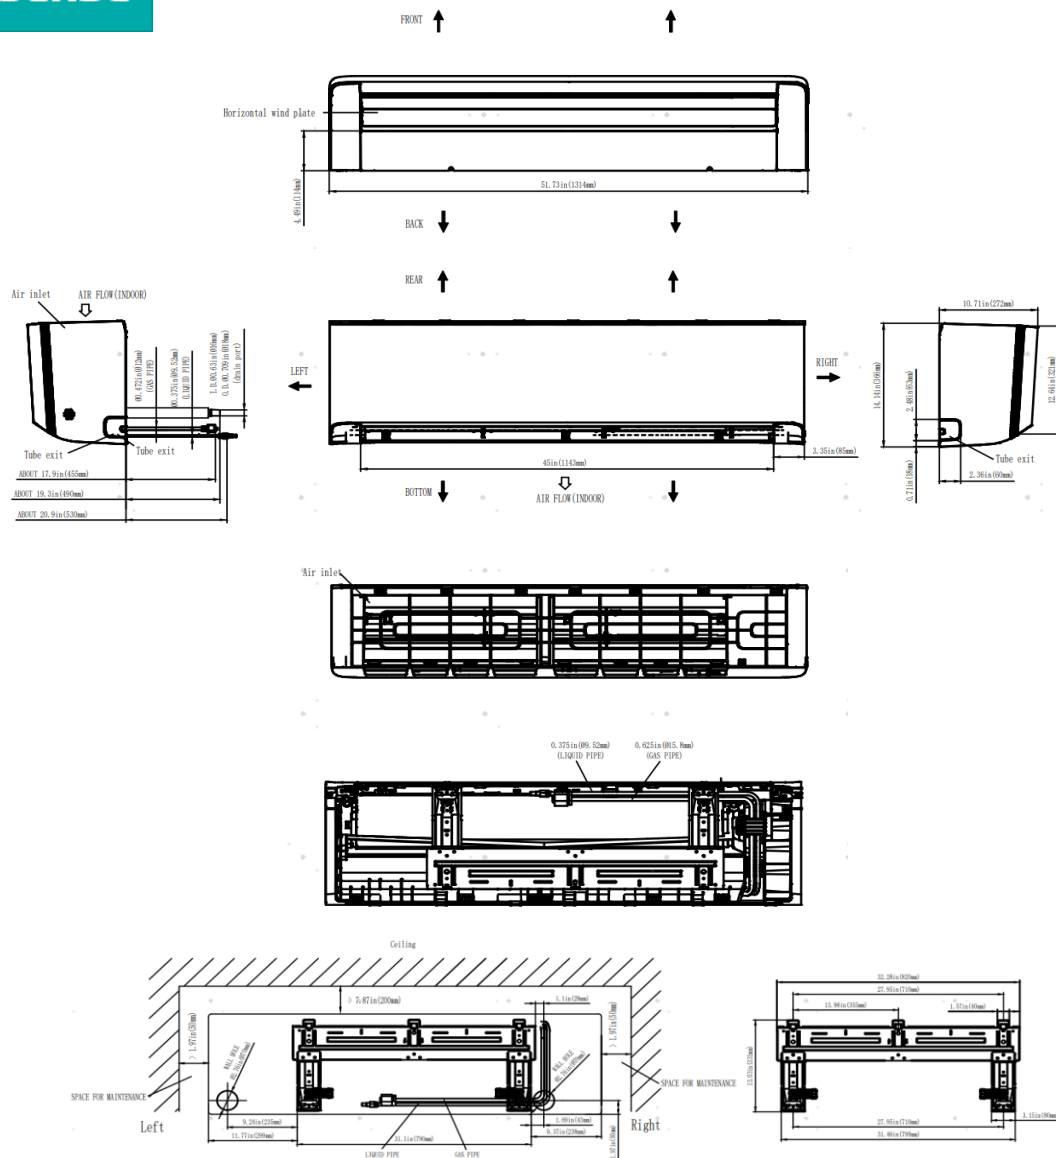


Note: Liquid Pipe Size and Gas Pipe Size are subject to the Specifications  
Specifications are subject to change without notice  
Version: 20260601

## Outdoor Unit Dimensions:

**Hisense**

Unit: inch (mm)

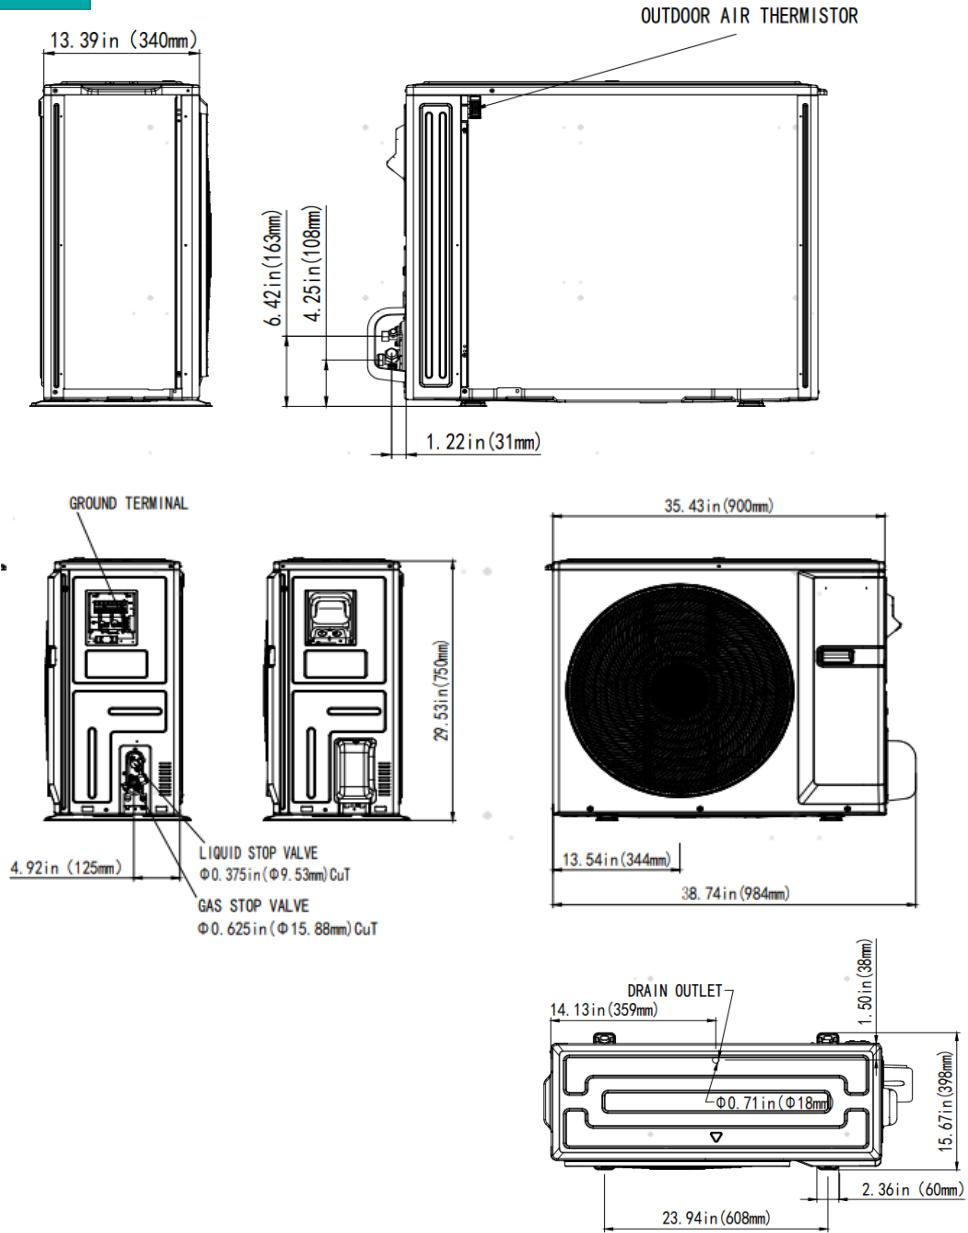

Note: Liquid Pipe Size and Gas Pipe Size are subject to the Specifications  
 Specifications are subject to change without notice  
 Version: 20260601


## ACCESSORIES

| Type                             | Model                                                    | Images                                                                              | Description                                                                                                                                                                                                                                                                                                                                      | Applicable Series/<br>models                                                                       |
|----------------------------------|----------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Wireless Remote Controller       | RCH-RTY5                                                 |    | Provides convenient control of temperature, fan speed, operating mode, airflow direction, timer settings, and sleep functions. Features a user-friendly interface with a clear LCD display.                                                                                                                                                      | Hi-ULTRA /Hi-EDGE/SmartSense Console/Ceiling Cassette /Slim Duct                                   |
|                                  | RCH-RTY4                                                 |    | Wireless Remote Controller with Intelligent Eye<br>Includes all RTY5 functions plus Intelligent Eye occupancy sensing for enhanced comfort and energy savings through direct and indirect airflow control.                                                                                                                                       | Only Hi-PRO                                                                                        |
|                                  | RCH-RTY4-2                                               |    | Enhanced Wireless Remote Controller<br><ul style="list-style-type: none"> <li>• Factory default F° temperature display</li> <li>• Precision louver positioning for improved comfort and draft reduction</li> <li>• Compatible with products manufactured after June 2026</li> </ul>                                                              | Hi-PRO/Hi-ULTRA / Hi-EDGE/ SmartSense Console\Ceiling Cassette \Slim Duct                          |
| Wired Remote Controller          | HS-WC01U<br>No Central Control Support                   |    | Does not support Central Control, Group Control, or BACnet communication.                                                                                                                                                                                                                                                                        | Supported on all Hisense products except AHU for Hi-PRO, Hi-ULTRA, Hi-EDGE, and SmartSense series. |
|                                  | HS-WC02U<br>No Wireless Remote; Supports Central Control |    | HS-WC02U does not support wireless remote reception. Supports BACnet communication, Central Control, and Group Control.                                                                                                                                                                                                                          |                                                                                                    |
|                                  | HS-WC03                                                  |    | 24V thermostat<br>Control your comfort anytime, anywhere with built-in Wi-Fi and smartphone connectivity.<br>Optimize efficiency and comfort with intelligent multi-stage heating/cooling control and programmable scheduling.<br>Enjoy a premium user experience with a color touchscreen, humidity monitoring, and advanced system protection. | All Air Handlers, Hi-PAK units, and third-party equipment.                                         |
| Wired Controller Extension Cable | 2371165                                                  |   | HS-WC01U and HS-WC02U wired controllers come standard with an 8 m (26 ft) connection cable (Part No. 1549323).<br>An optional extension cable is available, allowing the maximum cable length to be extended up to 30 m (98 ft).                                                                                                                 | HS-WC01U<br>HS-WC02U                                                                               |
| Central Controller               | HS-WC01T                                                 |  | BACnet Central Controller<br>Provides centralized control of up to 16 indoor units through the HS-CB544 BACnet communication module.<br>For larger systems, third-party Building Management Systems (BMS) are recommended.                                                                                                                       | Supported on all Hisense products except AHU for Hi-PRO, Hi-ULTRA, Hi-EDGE, and SmartSense series. |
| Control Box                      | HS-CB544                                                 |  | BACnet / Modbus Gateway Module<br>Communication interface module for Building Management System (BMS) integration.<br>Features:<br>BACnet protocol support<br>Modbus protocol support<br>One module required per indoor unit                                                                                                                     | Supported on all Hisense products except AHU for Hi-PRO, Hi-ULTRA, Hi-EDGE, and SmartSense series. |
| Auxiliary Electric Heat Control  | HS-Interlock                                             |  | HS-INTERLOCK CABLE<br>Enables interlock operation between compatible wall-mounted units and a secondary heating source (such as auxiliary heater).<br>Cable length: 24.6 ft (7.5 m).                                                                                                                                                             | Available on selected models only. Refer to individual model features for details.                 |
| Service tool                     | HI-CHECKER 3.0                                           |  | HI-CHECKER 3.0 is a Bluetooth diagnostic tool designed for installation, commissioning, troubleshooting, and maintenance of Hisense inverter systems. Technicians can access real-time operating data, fault history, and system parameters directly from a smartphone                                                                           | Applicable to all Hisense outdoor units                                                            |

# Specifications are subject to change without notice

Version: 20260601

Hisense

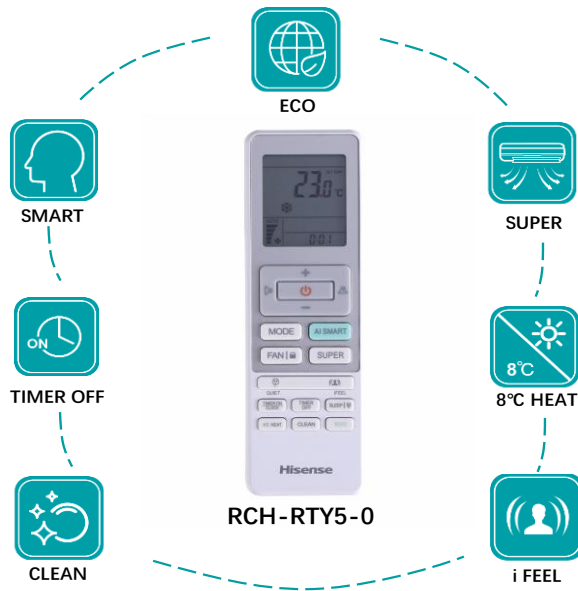

#### Button Description



Press this button to select the operation mode



Used to adjust the set temperature and the timer, also real time



Used to adjust vertical adjustment louver swinging and set the desired up/down airflow direction



Used to adjust the swing of the horizontal louver and set the left/right airflow direction



Used to start or stop the fast cooling/heating (Fast cooling operates at high fan speed with 60°F (16°C) set temp automatically. Fast heating operates at auto fan speed with 80°F (30°C) set temp automatically)



FAN/LOCK

Used to select fan speed in sequence: auto, higher, high, medium, low, lower. Press this button for 5 seconds to activate LOCK mode; press it again for 5 seconds to deactivate the mode.



i FEEL

Used to set or cancel I FEEL Mode. In I FEEL mode the Air Conditioner operates basis temperature sensor fitted in remote instead of machine. Advice to use I FEEL mode end the remote put where the indoor unit receives signal easily



CLEAN

Used to set the Clean operation



SMART

Used to start Smart Running Mode. Smart Mode automatically selects the appropriate operating mode—Cooling, Dry, Fan Only, or Heating

# Hisense

## RCH-RTY4-2



Cassette



Wall Mounted



Console



Duct (Optional)



### 1 VERTICAL SWING

Controls vertical louver swing and allows customization of up-and-down airflow direction.



### 2 FAN / LOCK

Cycles through fan speed settings (Auto, High, Medium, Low). Press and hold for 5 seconds to activate or deactivate the child lock function.



### 3 FRESH / QUIET

This button enables activation and deactivation of Fresh Mode and Quiet Mode: a single press turns on Fresh Mode to bring fresh air indoors, while a 5-second long press lowers compressor and fan speeds for quiet operation.



### 4 TIMER ON / CLOCK

Allows setting or canceling timer functions, as well as configuring the current time.



### 5 AIRFLOW FOLLOW / AVOID YOU

Activate or deactivate the air follow your or avoid you function, wind follow you mode brings cooler wind, avoid you mode eliminates the discomfort caused by air blowing directly at you.

\*This feature is only applicable to Ductless system



### 6 HORIZONTAL SWING

Controls horizontal louver swing and allows you to set the desired left and right airflow direction.

\*This feature is only applicable to Ductless system



### 7 AUTO

Enables AI Auto Mode to automatically adjust operating mode, temperature, wind speed, wind direction and humidity based on indoor ambient conditions, delivering optimal comfort.



### 8 SUPER

Press the Super button to run the air conditioner at maximum power and airflow regardless of ambient temperature for rapid cooling or heating.

VERTICAL SWING 1

FAN / LOCK 2

FRESH / QUIET 3

TIMER ON / 4  
CLOCKAIRFLOW FOLLOW / 5  
AVOID YOU

HORIZONTAL SWING 6

7 AUTO

8 SUPER


9 I FEEL / 8°C(46°F) HEAT

10 SLEEP / DIMMER

12 LOUVER

11 TIMER OFF / ECO

13 CLEAN

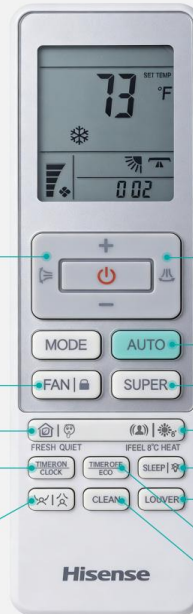

\*The brand-new RCH-RTY4-2 wireless controller will replace the original RCH-RTY5 and RCH-RTY4-0 wireless controllers.



### 9 I FEEL / 8°C(46°F) HEAT

This button controls IFEEL Mode and 8°C(46°F) Heating Mode. When IFEEL Mode is activated, the unit takes readings from the remote controller's sensor rather than the indoor unit. Please ensure the remote controller is placed within good signal reception range.



### 10 SLEEP / DIMMER

Enables setting and canceling Sleep Mode. Press and hold the button for 5 seconds to activate Dimmer mode, and press again for 5 seconds to deactivate it.



### 11 TIMER OFF / ECO

Allows setting or canceling timer functions, and enables activation or deactivation of Economy Mode.



### 12 LOUVER

Precision airflow adjustment with independent louver settings or fine-tune each louver individually. Customize angles or enable auto swing for targeted or wide-range airflow.

\*This feature is only applicable to Cassette



### 13 CLEAN

Press this button to enable self-cleaning mode. Adopting Hisense patented indoor self-cleaning technology, it efficiently removes dust, bacteria, microorganisms, oil stains and more for deep cleaning and healthier air supply.

Note: RCH-RTY4-2 remote controller availability is planned for Q3 2026.

# Specifications are subject to change without notice

Version: 20260601

**Hisense**

**OPTIONAL WIRING CONTROLLER**



Large **LCD Display** for EZ read and control



24h Real Timer and **Weekly Timer** setting



Eliminate the feeling of being cold  
Reduce power consumption

HS-WC01U  
HS-WC02U



- ❖ **Signal receiver** of Remote Control – **only HS-WC01U**
- ❖ **Central Controller** for Max. 16 units - **only HS-WC01T**

**Button Description**

**1. ON/OFF BUTTON**

The appliance will be started or stopped when this button is pressed.

**2. RUN INDICATOR**

Indicates that the appliance is on.

**3. MODE BUTTON**

Press this button to select the operation mode.

**4. FAN BUTTON**

Used to select fan speed in sequence high-auto-low-medium-high.

**5. SWING BUTTON**

Used to stop or start adjustment louver swinging and set the desired airflow direction.

**6. TIMER/CLOCK BUTTON**

Used to set the current time or set timer on/off.

**7. SLEEP BUTTON**

Used to set or cancel Sleep Mode operation.

**8. ENTER BUTTON**

Used to confirm settings.

**9. CANCEL BUTTON**

Used to cancel settings.

**10. ADD. FUNC. BUTTON**

Used to set filter clean, hot water, fresh air, electric heater, etc.

**11. INCREASE SETTING BUTTON**

Used to raise the set temperature.

It raise the values when setting.

**12. DECREASE SETTING BUTTON**

Used to lower the set temperature.

It lower the values when setting.

**13. LIQUID CRYSTAL DISPLAY(LCD) SCREEN**

Used to display indicator screens.

**14. BUILT-IN INFRARED SIGNAL RECEIVER**

Used to receive infrared signal.



Scan the QR code to explore more  
Address: 5995 Windward Pkwy Alpharetta, GA30024  
[www.hisensecomfort.com](http://www.hisensecomfort.com)  
Please refer to the Hi-Tech App for the most up-to-date information

# Specifications are subject to change without notice

Version: 20260601