



## Universal IDU - Console

|            |               |               |
|------------|---------------|---------------|
| Job Name:  | Location:     | Date:         |
| Engineer:  | Submitted to: | Submitted by: |
| Approval:  | Construction: | Unit #:       |
| Reference: | Drawing #:    |               |

### Key Features:

- \* **Integrated Wi-Fi** plus the Connectlife smart app ,put easy operation right at your fingertips.
- \* **Build in A2L Safety Sensor** - Ensures safety for both homeowners and technicians
- \* **Built-In Humidity Sensor**-Enhanced humidity management for improved indoor comfort
- \* **Fresh Air Connection**-Unit is capable of introducing outdoor air through a dedicated fresh air intake connection
- \* Self-cleaning indoor with **Hisense FrostClean™ technology** to reduces dust and bacteria for a healthier home
- \* **Air Flow dip switch** for adjustable air direction,delivering balanced and whole room comfort.




### SPECIFICATIONS

| Model Name                      |                           |              | AMK-09U3T25U          | AMK-12U3T25U          | AMK-18U3T25U          |
|---------------------------------|---------------------------|--------------|-----------------------|-----------------------|-----------------------|
| Capacity                        | Cooling capacity          | Btu/h        | 9000                  | 12000                 | 18000                 |
|                                 | Heating capacity          | Btu/h        | 9000                  | 12000                 | 18000                 |
| Electrical Data                 | Power                     | V/Hz/f       | 208/230 60 1          | 208/230 60 1          | 208/230 60 1          |
|                                 | Rated current             | A            | 0.28                  | 0.28                  | 0.28                  |
|                                 | connection cable          | NO-AWG       | 4×14                  | 4×14                  | 4×14                  |
|                                 | Degrees of protection     | /            |                       |                       |                       |
| Fan Motor                       | Model                     | /            | ZKFP-30-8-207         | ZKFP-30-8-207         | ZKFP-30-8-207         |
|                                 | Type/Qty                  | /            | DC/1                  | DC/1                  | DC/1                  |
|                                 | Output                    | W            | 30                    | 30                    | 30                    |
|                                 | Speed(H/M/L)              | r/min        | 720/620/520           | 720/620/520           | 720/620/520           |
| Air flow (H/M/L)                |                           | CFM          | 388/329/271           | 388/329/271           | 388/329/271           |
| Noise Level (Sound Pressure Hi) |                           | dB(A)        | 44/40/35              | 44/40/35              | 44/40/35              |
| Dimension                       | Net Dimension (WxHxD)     | inch         | 27-1/2 ×24-3/4 ×8-5/8 | 27-1/2 ×24-3/4 ×8-5/8 | 27-1/2 ×24-3/4 ×8-5/8 |
|                                 | Package Dimension (WxHxD) | inch         | 33-1/8×28-3/4×13-3/8  | 33-1/8×28-3/4×13-3/8  | 33-1/8×28-3/4×13-3/8  |
| Weight                          | Net Weight                | lbs          | 33.1                  | 33.1                  | 33.1                  |
|                                 | Gross Weight              | lbs          | 41.9                  | 41.9                  | 41.9                  |
| Pipe Size                       | Diameter(Liquid)          | inch         | 1/4                   | 1/4                   | 1/4                   |
|                                 | Diameter(Gas)             | inch         | 3/8                   | 3/8                   | 1/2                   |
| Loading capacity                |                           | 20'/40'/40HQ | 154/308/308           | 154/308/308           | 154/308/308           |

## Unit Dimension

Inch (mm)


9/12/18K

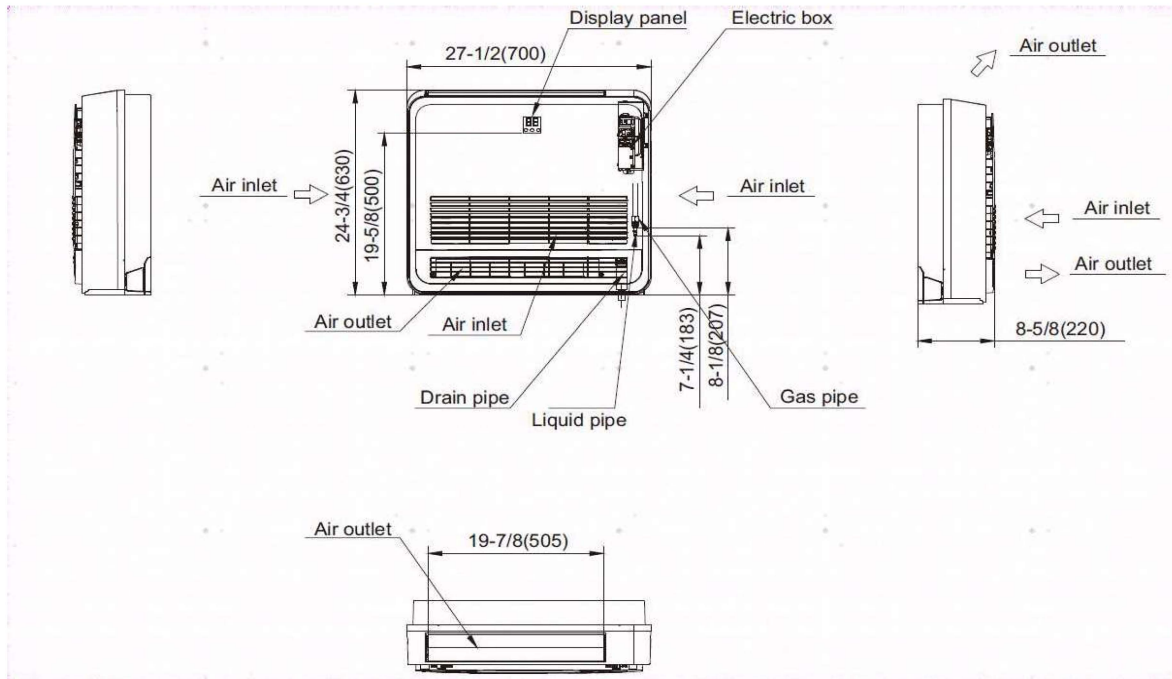

## Accessories

| Controller |                                                      |          |
|------------|------------------------------------------------------|----------|
| RCH-RTY5-0 | Remote Controller                                    | standard |
| HS-WC01U   | Wired Controller (built-in infrared signal receiver) | optional |
| HS-WC02U   | Wired Controller                                     | optional |
| HS-WC01T   | Central controller (Hisense IDU only)                | optional |

## REMOTE CONTROLLER

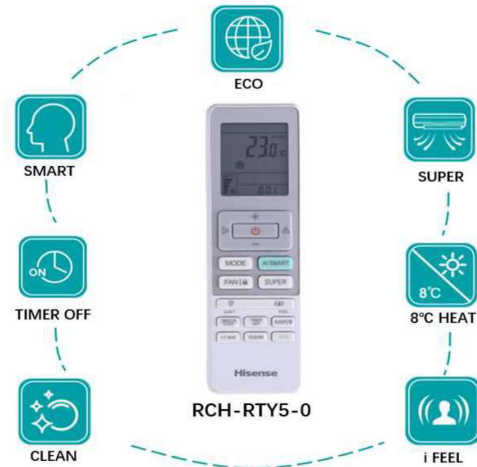

### Button Description

|  |                                                                                                                                                                                                                                        |
|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | Press this button to select the operation mode                                                                                                                                                                                         |
|  | Used to adjust the set temperature and the timer, also real time                                                                                                                                                                       |
|  | Used to adjust vertical adjustment louver swinging and set the desired up/down airflow direction                                                                                                                                       |
|  | Used to adjust the swing of the horizontal louver and set the left/right airflow direction                                                                                                                                             |
|  | Used to start or stop the fast cooling/heating (Fast cooling operates at high fan speed with 60°F (16°C) set temp automatically. Fast heating operates at auto fan speed with 80°F (30°C) set temp automatically)                      |
|  | Used to select fan speed in sequence: auto, higher, high, medium, low, lower. Press this button for 5 seconds to activate LOCK mode; press it again for 5 seconds to deactivate the mode                                               |
|  | Used to set or cancel i FEEL Mode. In i FEEL mode the Air Conditioner operates basis temperature sensor fitted in remote instead of machine. Advice to use i FEEL mode end the remote put where the indoor unit receives signal easily |
|  | Used to set the Clean operation                                                                                                                                                                                                        |
|  | Used to start Smart Running Mode. Smart Mode automatically selects the appropriate operating mode—Cooling, Dry, Fan Only, or Heating                                                                                                   |



Large **LCD Display** for EZ read and control



24h Real Timer and **Weekly Timer** setting



Eliminate the feeling of being cold  
Reduce power consumption

HS-WC01U  
HS-WC02U



❖ **Signal receiver** of Remote Control – **only HS-WC01U**

❖ **Central Controller** for Max. 16 units - **only HS-WC01T**

## Button Description

### 1. ON/OFF BUTTON

The appliance will be started or stopped when this button is pressed.

### 2. RUN INDICATOR

Indicates that the appliance is on.

### 3. MODE BUTTON

Press this button to select the operation mode.

### 4. FAN BUTTON

Used to select fan speed in sequence high-auto-low-medium-high.

### 5. SWING BUTTON

Used to stop or start the adjustment louver swinging and set the desired airflow direction.

### 6. TIMER/CLOCK BUTTON

Used to set the current time or set timer on/off.

### 7. SLEEP BUTTON

Used to set or cancel Sleep Mode operation.

### 8. ENTER BUTTON

Used to confirm settings.

### 9. CANCEL BUTTON

Used to cancel settings.

### 10. ADD. FUNC. BUTTON

Used to set filter clean, hot water, fresh air, electric heater, etc.

### 11. INCREASE SETTING BUTTON

Used to raise the set temperature;

It raise the values when setting.

### 12. DECREASE SETTING BUTTON

Used to lower the set temperature;

It lower the values when setting.

### 13. LIQUID CRYSTAL DISPLAY(LCD) SCREEN

Used to display indicator screens.

### 14. BUILT-IN INFRARED SIGNAL RECEIVER

Used to receive infrared signal.