

Hisense

Hi-MULTI

Horizontal Discharge Heat Pump
SEER2 up to 22.00 and HSPF2 up to 10.00

Outdoor Unit Model

AMO4-36U3T25U

Job Name:

Location:

Date:

Engineer:

Submitted to:

Submitted by:

Approval:

Construction:

Unit #:

Reference:

Drawing #:

Key Features:

ENERGY STAR qualified 70+% heating at -13°F (-25°C) 18-45k

Xtreme Heat up to 100% Heating at 5°F (5 Zone 86%)

Long connection pipes up to 262t length, 49tt height

Built-in condenser base pan heater & crank case heater

Low temperature heating down to -13°F (-25°C)

Low temperature cooling down to 5°F (-15°C)


Connected capacity up 130%

Universal IDU compatible

Smart control logic guarantees the R454B refrigerant distribution of each indoor units and balances cooling capacity or heating capacity for each room.

"Hi-Checker" built-in for identification of most errors

Built-in Wi-Fi plus the Connectlife smart app for effortless system control with walmount units



www.HisenseComfort.com

SPECIFICATIONS

AHRI Certificate # Ducted	216472837
AHRI Certificate # Non-Ducted	216472838
AHRI Certificate # - Mixed	216472839
Outdoor Unit	AMO4-36U3T25U

EFFICIENCY (Ducted)		
SEER2	Btu/ (W.h)	19
EER2	Btu/ (W.h)	12.85
HSPF2	Btu/ (W.h)	9
COP @ 47°F	W/W	3.91
COP @ 5°F	W/W	1.83

EFFICIENCY (Mixed)		
SEER2	Btu/ (W.h)	20.5
EER2	Btu/ (W.h)	12.85
HSPF2	Btu/ (W.h)	9.5
COP @ 47°F	W/W	3.91
COP @ 5°F	W/W	1.87

Cooling Performance		
*Rated Capacity (Ducted)	BTU/H	36000
*Rated Capacity (Non-Ducted)	BTU/H	36000
*Rated Capacity (Mixed)	BTU/H	36000
Min.-Max. Capacity (Ducted)	BTU/H	15145-48975
Min.-Max. Capacity (Non-Ducted)	BTU/H	9000-46800
Min.-Max. Capacity (Mixed)	BTU/H	13770-45950
Capacity @ 125°F Max (Ducted)	BTU/H	20100
Capacity @ 125°F Max (Non-Ducted)	BTU/H	20500
Capacity @ 125°F Max (Mixed)	BTU/H	20000
Rated Power Input (Ducted)	W	2802
Rated Power Input (Non-Ducted)	W	2802
Rated Power Input (Mixed)	W	2802
Min.-Max. Power Input (Ducted)	W	1470-5141
Min.-Max. Power Input (Non-Ducted)	W	1200-5350
Min.-Max. Power Input (Mixed)	W	1335-4644
*Testing Conditions:Indoor: 80°F DB / 67°F WB Outdoor: 95°F DB / 75°F WB.		

Heating Performance		
*Rated Capacity (Ducted)	BTU/H	36000
*Rated Capacity (Non-Ducted)	BTU/H	36000
*Rated Capacity (Mixed)	BTU/H	36000
Min.-Max. Capacity (Ducted)	BTU/H	14931-50108
Min.-Max. Capacity (Non-Ducted)	BTU/H	9000-54000
Min.-Max. Capacity (Mixed)	BTU/H	14638-50641
Rated Power Input (Ducted)	W	2700
Rated Power Input (Non-Ducted)	W	2700
Rated Power Input (Mixed)	W	2700
Min.-Max. Power Input (Ducted)	W	2050-5088
Min.-Max. Power Input (Non-Ducted)	W	1950-5250
Min.-Max. Power Input (Mixed)	W	2090-4374
Capacity @ 17°F Rated /Max (Ducted)	BTU/H	21000/33900
Capacity @ 17°F Rated /Max (Non-Ducted)	BTU/H	22600/36000
Capacity @ 17°F Rated /Max (Mixed)	BTU/H	21800/33875
Capacity @ 5°F Rated (Max) (Ducted)	BTU/H	32400
Capacity @ 5°F Rated (Max) (Non-Ducted)	BTU/H	36000
Capacity @ 5°F Rated (Max) (Mixed)	BTU/H	34200
Capacity @ -13°F Max (Ducted)	BTU/H	26040
Capacity @ -13°F Max (Non-Ducted)	BTU/H	26180
Capacity @ -13°F Max (Mixed)	BTU/H	26110
* Testing Conditions: Indoor: 70°F DB / 60°F WB Outdoor: 47°F DB / 43°F WB		

PIPING and Refrigerant		
Liquid Pipe Size O.D	in (mm)	1/4" (Ø6.35)
Gas Pipe Size O.D	in (mm)	3/8" (Ø9.52)
Maximum Piping Length	ft (m)	230(70)
Maximum Height Difference	ft (m)	49(15)
Refrigerant Type	/	R454B
Refrigerant Pre-charged Amount	oz(kg)	105.8(3.0)
Max. Pre-charged Length(ft/m)	ft (m)	98.43(30)
Additional Charge of Refrigerant	oz/ft	0.16
Connection Method [Flared/Braze]	/	Flare

EFFICIENCY (Non- Ducted)		
SEER2	Btu/ (W.h)	22
EER2	Btu/ (W.h)	12.85
HSPF2	Btu/ (W.h)	10
COP @ 47°F	W/W	3.91
COP @ 5°F	W/W	1.92


Standard Operating Range(°F /°C)	
Outdoor Cooling °F (°C)	5 to 125 (-15 to 52)
Outdoor Heating °F (°C)	-13 to 75 (-25 to 24)

ELECTRICAL DATA		
System power supply		
Voltage, Hertz,Phase	V/ph/HZ	208/230V,1Ph,50/60Hz
Available Voltage Range	V	187 - 253
Cooling / Heating Rated Amps (Ducted)	A	12.4/12
Cooling / Heating Rated Amps (Non-Ducted)	A	12.4/12
Cooling / Heating Rated Amps (Mixed)	A	12.4/12
Communication Wiring Size	NO-AWG	4×16
Power cable Size	NO-AWG	3×8
System MCA	A	34
System MOCP	A	35
MCA - Minimum Circuit Ampacity		
MOP - Maximum Overcurrent Protection		

OUTDOOR UNIT SPECIFICATIONS:		
Compressor		
Type	/	ROTARY-INVERTER
Model	/	C-7RZ420H1CAF
Brand	/	CRSS
Capacity	Btu/h	41524
Input	W	3800
Rated current_Amps (RLA)	A	14.6
Refrigerant Oil Type	/	FV68S
Refrigerant Oil Amount	ml	1200
ODU Throttle Type	/	EEV
Outdoor Fan Motor		
Model	/	ZWB4710L18A
Type/Qty	/	DC/1
Motor output	HP	1/3
RLA	A	1.3
Speed	r/min	830
Outdoor Airflow Rate		
Cooling (H)	CFM	3357
	m3/h	5700
Outdoor Sound Pressure Level		
High	dB (A)	64
Fin Type /Tube Type	Hydrophilic aluminium/ Copper	
Coating on Fin	colour – hours	GOLD –1500
Net Dimensions (W×D×H)	In	38-3/8×14-1/8 ×32-7/8
	mm	975×360×835
Package (W×D×H)	In	43-3/4×18-1/8×37-3/4
	mm	1110×460×960
Net Weight	Lbs.	169.8
	kg	77
Shipping Weight	Lbs.	191.8
	kg	87

Outdoor Unit Dimension

Inch (mm)

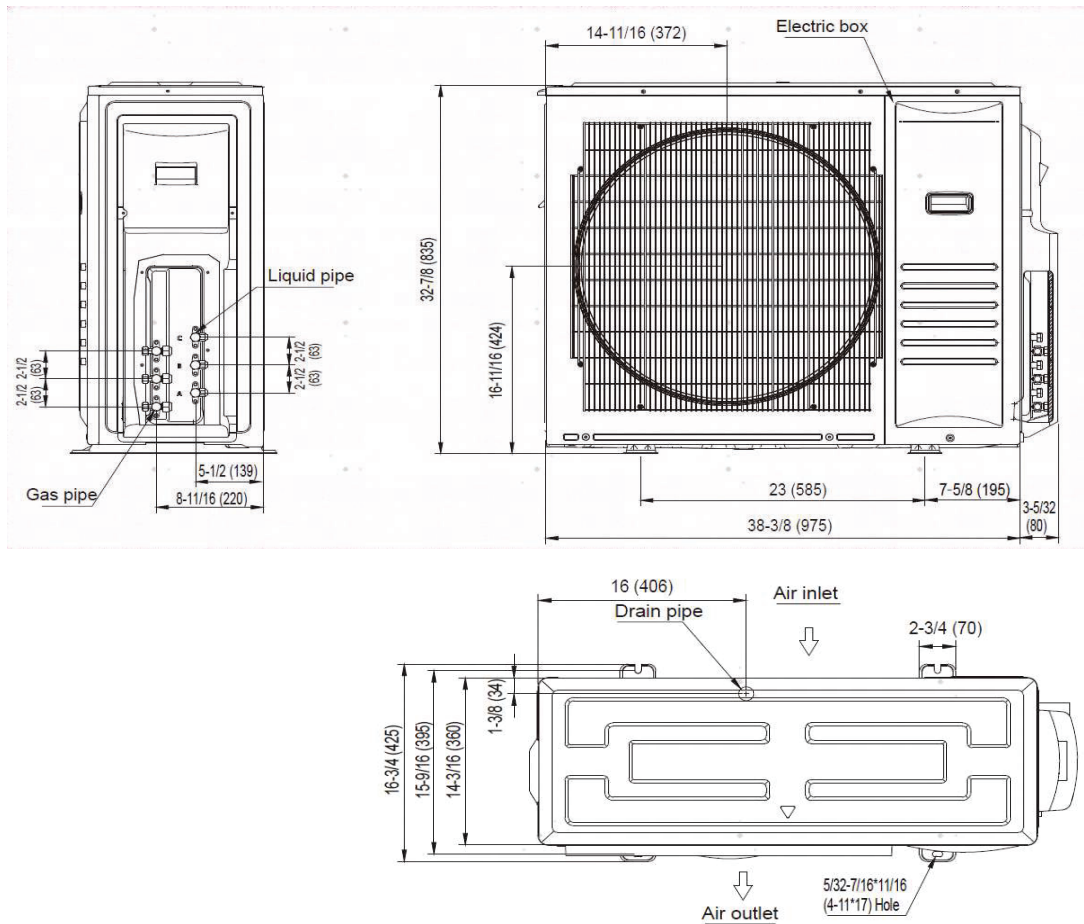

Accessories

Adaptors		
No	Description	Part number
1	9.52 change into 12.7	1493010
2	9.52 change into 15.88	2014749
3	6.35 change into 9.52	2014748

note:if you need extra adaptors ,please purchase separately.



Scan the QR code to explore more
 Warranty*Requires registration - some restrictions apply
 Due to continuous improvements,specifications are subject to change without notice.
 Version:02-02-2026