

Hisense

Hi-UNI

Hi-UNI Outdoor Unit Matched with Wall Mounted Inverter Heat Pump SEER2 22 SEER2 and 9.5 HSPF2 12,000 BTU/H Cooling Capacity and 12,000 BTU/H Heating Capacity

Indoor Unit Model	ASU-12U3THB25U ASU-12U3THB25U-B	Outdoor Unit Model	AOU-12U3T25U
Job Name:	Location:	Date:	
Engineer:	Submitted to:	Submitted by:	
Approval:	Construction:	Unit #:	
Reference:	Drawing #:		

Equipment Features:

OUTDOOR UNIT

- * **Efficiency and comfort:** Up to 22 SEER2 / 11.7 EER2 / 9.5 HSPF2
- * **Low Ambient Performance:** Confirmed continuous operation as low as -13 °F (-25°C) ambient temperature.
- * Low-GWP EPA **R454B** Refrigerant
- * **Base Pan Electric Heater** installed for stable operation in extreme conditions.
- * **GoldFin™ Anti-Corrosion Heat Exchanger and Insect-Proof** electronics box design for long-lasting reliability
- * Outdoor **Intelligent defrost** tech improves system efficiency and reliable operation

INDOOR UNIT

- * **Quick and easy installation** with mounting bracket and detachable IDU base plate.
- * Integrated **Wi-Fi plus the Connectlife smart app**, put easy operation right at your fingertips.
- * **Built-in A2L Safety Sensor** - Ensures safety for both homeowners and technicians.
- * **Blue Fin Anti-Corrosion Heat Exchanger**, Max 1,000-hour salt-spray tested for extended life and increase performance.
- * **4-Way Air Flow** for optimized comfort.
- * Easily accessible and washable **High Definition Filter** for improved air quality and maintenance.
- * Self-cleaning indoor with Hisense **FrostClean™** technology to reduce dust and bacteria for a healthier home
- * **"I Feel" Mode** to control the temperature user location/remote vs indoor
- * **Display Dimmer** turns off both displays to eliminate lighting at night
- * **Child-Safe Finger Guards** to protect small hands from the indoor fan.



RCH-RTY4-2



Certifications



Scan the QR code to explore more

product improvements, specifications are subject to change without notice.

Please log in to the www.HisenseComfort.com/Hi-Tech APP for the most up-to-date

Version: 20260705

Controller Options

Model No :HS-WC01U/HS-WC02U
Hisense 12V Smart Thermostat



Warranty* Requires registration-some restrictions apply

UP TO 10 YEAR PARTS UP TO 2 YEAR LABOR UP TO 2 YEAR UNIT



www.HisenseComfort.com

SPECIFICATIONS

AHRI Certificate #	217231614 / 218026190	
Indoor Unit	ASU-12U3THB25U	
	ASU-12U3THB25U-B	
Outdoor Unit	AOU-12U3T25U	
Efficiency and Performance		
SEER2	Btu/ (W.h)	22
EER2	Btu/ (W.h)	11.7
HSPF2	Btu/ (W.h)	9.5
COP @ 5°F	W/W	1.8

Cooling Performance @ 95°F		
Rated Capacity	BTU/H	12000
Min.-Max. Capacity	BTU/H	4500-12700
Rated Power Input	W	1027
Min.-Max. Power Input	W	270-1210
Moisture Remova	Pints/h	2.54
Sensible Heat Factor	/	0.7
Power Factor [208V / 230V]	%	99

Heating Performance		
Heating @ 47°F Rated Capacity	BTU/H	12000
Heating @ 47°F Min.-Max. Capacity	BTU/H	5500-16000
Heating @ 47°F Rated Power Input	W	1000
Heating @ 47°F Min.-Max. Power Input	W	300-1460
Power Factor [208V / 230V]	%	99
Heating @ 17°F Rated Capacity	BTU/H	8900
Heating @ 17°F Max Capacity	BTU/H	12000
Heating @ 5°F Max Capacity	BTU/H	12000
Heating @ -13°F Rated Capacity	BTU/H	7800
Cooling Nominal Test Conditions: Indoor: 80°F DB / 67°F WB Outdoor: 95°F DB / 75°F WB.		
Heating Nominal Test Conditions: Indoor: 70°F DB / 60°F WB Outdoor: 47°F DB / 43°F WB		

Standard Operating Range (°F/°C)	
Remote Control Adjustable Temp.Range-Cooling	"61 to 86 (16 to30)
Remote Control Adjustable Temp.Range-Heating	"61 to 86 (16 to30)
Outdoor Cooling	"5 to 125 (-15 to 52)
Outdoor Heating	"-13 to 75 (-25 to 24)
# The system has no low-temperature cutout. Capacity is not tested outside of the rated temperature range.	

Electrical Data		
System power supply		
Voltage, Hertz,Phase	V AC	208/230V,60Hz,1Ph
Available Voltage Range	V AC	187—264
Rated Current Load [Cooling - Heating]	(A)	3.4/3.4
Power Supply IDU	Powered by the Outdoor Unit	
Communication Wiring Size AWG	4×16	
Power Cable Size AWG	Outdoor 3×14	
Recommended Fuse/Breaker Size (Outdoor)	(A)	15
Short-Circuit Current Rating [SCCR]	KA	0.4(250Vac)

Outdoor Piping and Refrigerant		
Liquid Pipe Size O.D. 【 Flared】	In. (mm)	Ø1/4 (Ø6.35)
Gas Pipe Size O.D. 【 Flared】	In. (mm)	Ø3/8 (Ø9.52)
Maximum Piping Length	Ft. (m)	130(40)
Maximum Height Difference	Ft. (m)	50(15)
Refrigerant Type	/	R454B
Pre-Charged Refrigerant Amount	oz(kg)	38.1 (1.08)
Max. Pre-Charged Piping Length	Ft. (m)	25(7.5)
Additional Refrigerant Charge Per Additional Piping Length	(oz/ft). (g/m)	0.16 (20)

Version: 20260705
Specifications are subject to change without notice


www.HisenseComfort.com

Indoor Unit Specifications		
MCA	A	3
MCA - Minimum Circuit Ampacity	MOP - Maximum Overcurrent Protection	
Indoor fan motor		
Model	/	KD09060426
Type	/	DC Motor
Motor Output	HP	"1/28
Full Load Amperage	A	0.3
Indoor Fan Airflow Rated		
Cooling (U-H-M-L-S)	CFM	412/400/318/265/235
	m3/h	700/680/540/450/400
Indoor Sound Pressure Level		
Cooling (U-H-M-L-S)	dB (A)	43/37/29/26/23
Others		
Drain Pipe Size	In. [mm]	Φ0.71/Φ18-O.D
Fin Type /Tube Type	Hydrophilic Aluminum / Copper	
Coating on Heat Exchanger	Type ~ Hours	GOLD~1500
Dimensions		
Unit Dimensions (W×D×H)	In	33-7/8×8-3/4×11-1/4
	mm	850×203×291
Package Dimensions (W×D×H)	In	36-5/8×11-1/4 ×15
	mm	910×265×360
Indoor Net Weight	Lbs. (kg)	20.9 [9.5]
Indoor Package Weight	Lbs. (kg)	25.3 [11.5]

Outdoor Unit Specifications		
MCA	A	12
MOCP	A	15
Compressor		
Type	/	Inverter Twin ROTARY
Capacity	Btu/h	14740
Input	W	1050
Rated Current Amps (RLA)	A	4.3
Compressor Oil Type/Amount	ml(oz.)	FV68S -600/20.28
ODU Refrigerant Control	Type	EEV
Outdoor Fan Motor		
Model	/	ZKFN-40-8-33
Type/Qty	/	DC/1
Motor Output	HP	"1/20
Full load amps (FLA)	A	0.7
Outdoor Fan Airflow Rate		
Cooling (H)	CFM	1354
	m3/h	2300
Outdoor Fan Speed		
Cooling (H)	r/min	880
Outdoor Sound Pressure Level		
Cooling (H)	dB (A)	59
Others		
Fin Type /Tube Type	Hydrophilic Aluminum / Copper	
Coating on Heat Exchanger	Type ~ Hours	GOLD~1500
Base Pan Heater	As standard	
Crankcase Heater	As standard	
Dimensions		
Unit Dimensions (W×D×H)	In	31-7/8×11×22-7/8
	mm	810×280×580
Package Dimensions (W×D×H)	In	37×16-1/2×25-1/4
	mm	940×420×640
Outdoor Net Weight	Lbs. (kg)	79.4 [36]
Package Weight	Lbs. (kg)	86.0 [39]

Indoor Unit Dimensions

Unit: in.(mm)

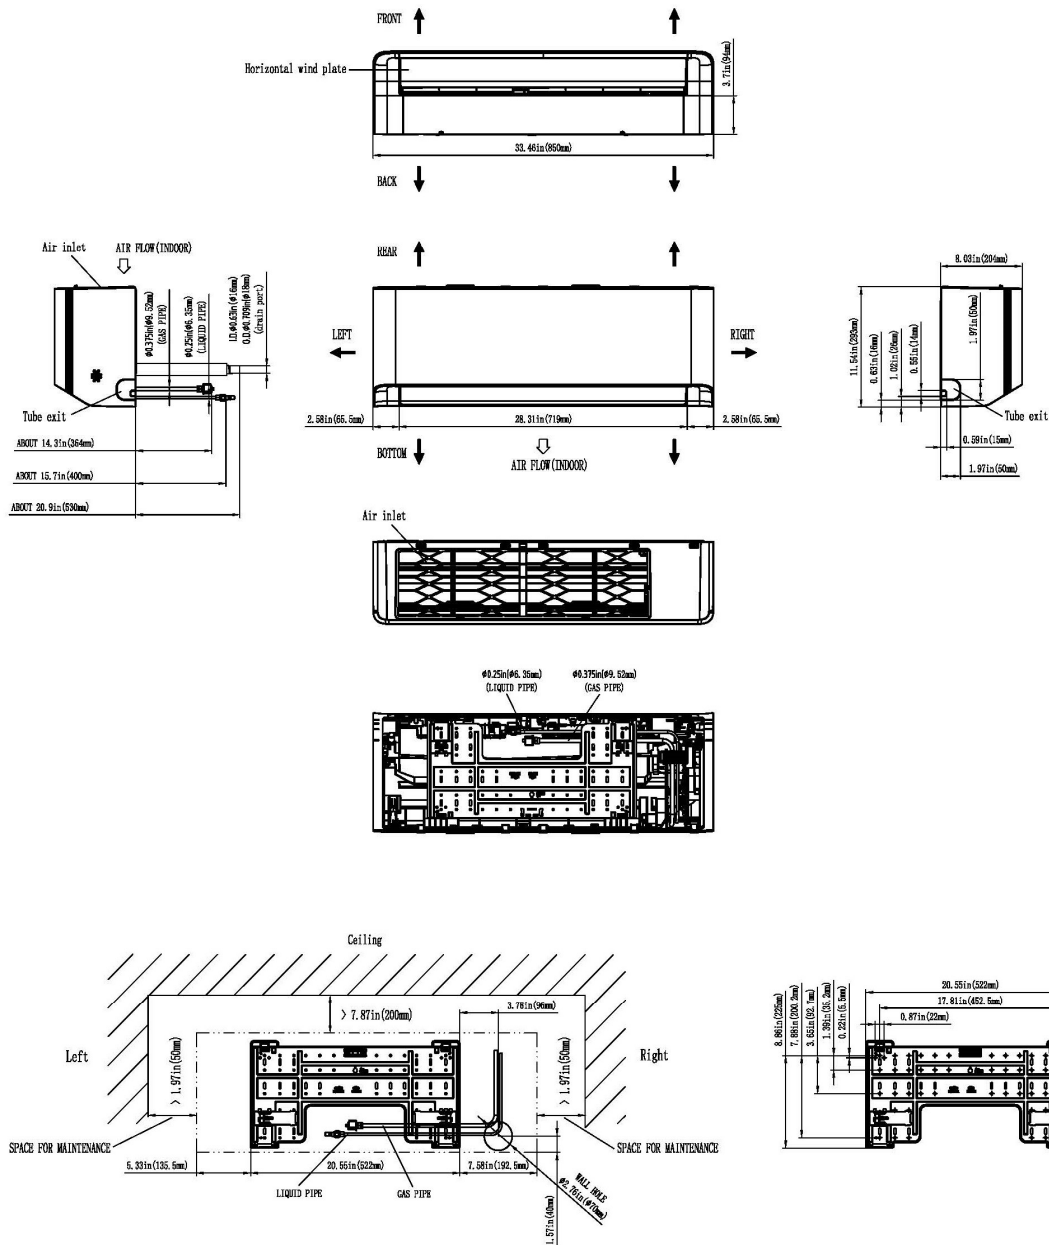


Version: 20260705

Specifications are subject to change without notice

www.HisenseComfort.com

Outdoor Unit Dimensions

Unit: in.(mm)

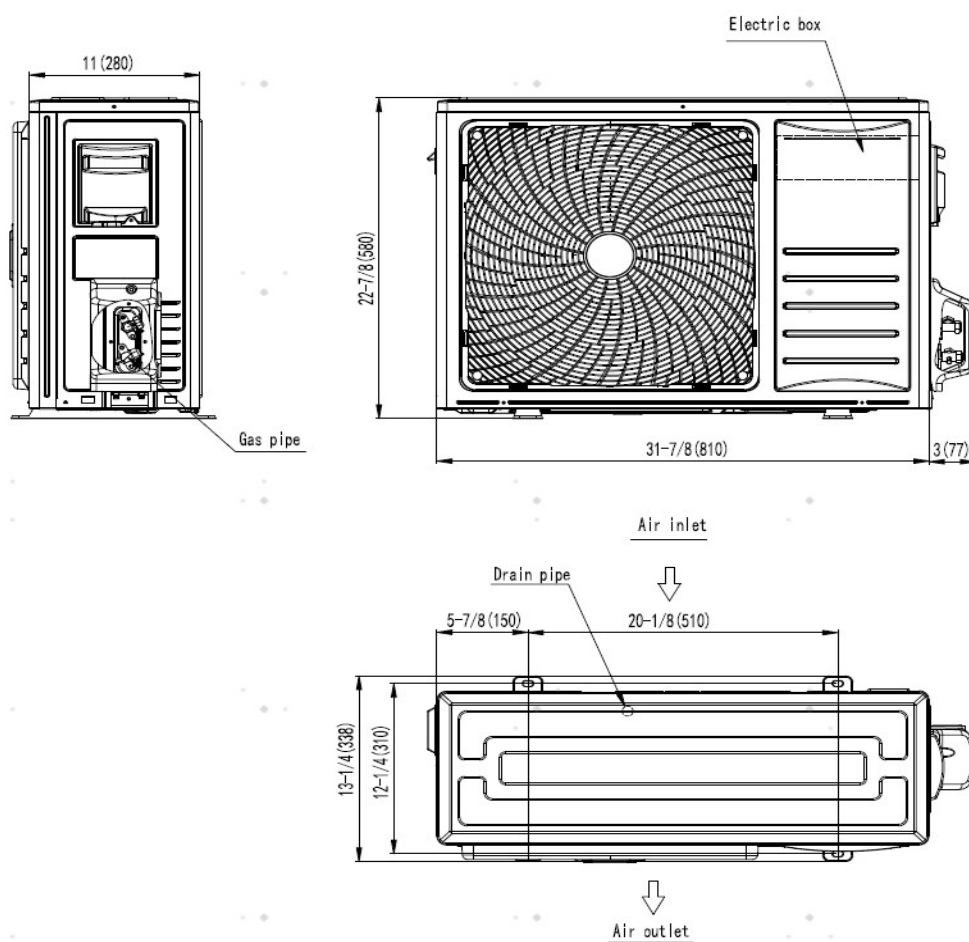

Version: 20260705

Specifications are subject to change without notice

www.HisenseComfort.com

WIRELESS REMOTE CONTROLLER



1 VERTICAL SWING

Controls vertical louver swing and allows customization of up-and-down airflow direction.



2 FAN / LOCK

Cycles through fan speed settings (Auto, High, Medium, Low). Press and hold for 5 seconds to activate or deactivate the child lock function.



3 FRESH / QUIET

This button enables activation and deactivation of Fresh Mode and Quiet Mode: a single press turns on Fresh Mode to bring fresh air indoors, while a 5-second long press lowers compressor and fan speeds for quiet operation.



4 TIMER ON / CLOCK

Allows setting or canceling timer functions, as well as configuring the current time.



5 AIRFLOW FOLLOW / AVOID YOU

Activate or deactivate the air follow you or avoid you function, wind follow you mode brings cooler wind, avoid you mode eliminates the discomfort caused by air blowing directly at you.

*This feature is only applicable to Ductless system



6 HORIZONTAL SWING

Controls horizontal louver swing and allows you to set the desired left and right airflow direction.

*This feature is only applicable to Ductless system



7 AUTO

Enables AI Auto Mode to automatically adjust operating mode, temperature, wind speed, wind direction and humidity based on indoor ambient conditions, delivering optimal comfort.



8 SUPER

Press the Super button to run the air conditioner at maximum power and airflow regardless of ambient temperature for rapid cooling or heating.

VERTICAL SWING 1

FAN / LOCK 2

FRESH / QUIET 3

TIMER ON / 4
CLOCK

AIRFLOW FOLLOW / 5
AVOID YOU

HORIZONTAL SWING 6

AUTO 7

SUPER 8

I FEEL / 8°C (46°F) HEAT 9

SLEEP / DIMMER 10

LOUVER 12

TIMER OFF / ECO 11

CLEAN 13



*The brand-new RCH-RTY4-2 wireless controller will replace the original RCH-RTY6 and RCH-RTY4-0 wireless controllers.



9 I FEEL / 8°C (46°F) HEAT

This button controls iFEEL Mode and 8°C (46°F) Heating Mode. When iFEEL Mode is activated, the unit takes readings from the remote controller's sensor rather than the indoor unit. Please ensure the remote controller is placed within good signal reception range.



10 SLEEP / DIMMER

Enables setting and canceling Sleep Mode. Press and hold the button for 5 seconds to activate Dimmer mode, and press again for 5 seconds to deactivate it.



11 TIMER OFF / ECO

Allows setting or canceling timer functions, and enables activation or deactivation of Economy Mode.



12 LOUVER

Precision airflow adjustment with independent louver settings or fine-tune each louver individually. Customize angles or enable auto swing for targeted or wide-range airflow.

*This feature is only applicable to Cassette



13 CLEAN

Press this button to enable self-cleaning mode. Adopting Hisense patented indoor self-cleaning technology, it efficiently removes dust, bacteria, microorganisms, oil stains and more for deep cleaning and healthier air supply.

Version: 20260705

Specifications are subject to change without notice

www.HisenseComfort.com

OPTIONAL WIRING CONTROLLER



Large **LCD Display** for EZ read and control



24h Real Timer and **Weekly Timer** setting



Eliminate the feeling of being cold
Reduce power consumption

HS-WC01U
HS-WC02U



❖ **Signal receiver** of Remote Control – **only HS-WC01U**

❖ **Central Controller** for Max. 16 units – **only HS-WC01T**

Button Description

1. ON/OFF BUTTON

The appliance will be started or stopped when this button is pressed.

2. RUN INDICATOR

Indicates that the appliance is on.

3. MODE BUTTON

Press this button to select the operation mode.

4. FAN BUTTON

Used to select fan speed in sequence high-auto-low-medium-high.

5. SWING BUTTON

Used to stop or start the adjustment louver swinging and set the desired airflow direction.

6. TIMER/CLOCK BUTTON

Used to set the current time or set timer on/off.

7. SLEEP BUTTON

Used to set or cancel Sleep Mode operation.

8. ENTER BUTTON

Used to confirm settings.

9. CANCEL BUTTON

Used to cancel settings.

10. ADD. FUNC. BUTTON

Used to set filter clean, hot water, fresh air, electric heater, etc.

11. INCREASE SETTING BUTTON

Used to raise the set temperature;

It raise the values when setting.

12. DECREASE SETTING BUTTON

Used to lower the set temperature;

It lower the values when setting.

13. LIQUID CRYSTAL DISPLAY(LCD) SCREEN

Used to display indicator screens.

14. BUILT-IN INFRARED SIGNAL RECEIVER

Used to receive infrared signal.

Version: 20260705

Specifications are subject to change without notice

www.HisenseComfort.com