



Submittal Data Sheet

Daikin AURORA 0.75-Ton, Floor Mount Heat Pump System
FVXV09AVJUT9- RXP09AVJU9

FEATURES

- Automatic defrosting & Automatic cooling/heating change over
- Auto Restart after Power failure
- Operation Range—Cooling (50°F - 114.8°F)
- Low temperature cooling operation down to -4°F (-20°C) with wind baffle and field settings
- Operating Range - Heating (-13.8°F - 64.4°F)
- Built in Wi-Fi
- Built in refrigeration detection system
- POWERFUL mode (quick cooling/heating boost).
- HEAT PLUS mode (high-temperature heating boost, timed operation).
- FLOOR WARMING mode (focuses airflow from the lower outlet).
- ECONO mode (limits maximum power consumption).
- QUIET OUTDOOR UNIT mode (reduces outdoor unit noise).
- Automatic CLEAN mode (fan runs after COOL/DRY to dry the interior).
- HOME LEAVE mode (stores and recalls preferred temperature/airflow).
- Weekly Timer scheduling (multiple on/off events per day across the week) plus on/off and count-up/down timers.
- Airflow controls: selectable air outlet control (Automatic/Upper-only), vertical auto-swing, and multiple fan speed steps (Auto, Quiet, 1-5).
- 12-year limited parts and compressor warranty with online registration
- 5-year limited parts warranty for commercial applications
- Inverter controlled Swing compressor with Reluctance DC motor
- Filter Cleaning Indicator
- Anti-corrosion treatment on outdoor heat exchanger
- Factory charged for up to 49.2 ft of piping length

INDOOR UNIT



BENEFITS

- Faster warm-up comfort with HEAT PLUS high-temperature discharge.
- Warmer, more comfortable floor-level heat distribution using FLOOR WARMING (lower outlet only).
- Cleaner indoor unit and reduce moisture/mold risk with automatic CLEAN drying cycle after COOL/DRY.
- More personalized comfort with HOME LEAVE one-touch preset recall.
- Greater comfort control via user-selectable air outlet selection (Automatic vs Upper-only).
- Softer, quieter comfort near setpoint with optional airflow softening when the set temperature is reached.
- More peace and quiet outside with QUIET OUTDOOR UNIT mode (where noise reduction is desired).
- Better day-to-day convenience with Weekly Timer scheduling to match routines and reduce manual adjustments.
- More comfortable "quick recovery" after setbacks with POWERFUL mode for rapid cooling/heating.
- Potentially lower peak energy use when needed by enabling ECONO mode to limit maximum power.
- Warmer, more comfortable floor-level heat distribution using FLOOR WARMING (lower outlet only).
- Cleaner indoor unit and reduced moisture/mold risk with automatic CLEAN drying cycle after COOL/DRY.
- More personalized comfort with HOME LEAVE one-touch preset recall.
- Greater comfort control via user-selectable air outlet selection (Automatic vs Upper-only).
- Softer, quieter comfort near setpoint with optional airflow softening when the set temperature is reached.

OUTDOOR UNIT





Submittal Data Sheet

Daikin AURORA 0.75-Ton, Floor Mount Heat Pump System
FVXV09AVJUT9- RXP09AVJU9

SYSTEM PERFORMANCE

Indoor Unit Model No.	FVXV09AVJUT9	Indoor Unit Name:	Daikin 0.75-Ton, Floor Mount Indoor Unit
Outdoor Unit Model No.	RXP09AVJU9	Outdoor Unit Name:	Daikin AURORA 0.75-Ton, Heat Pump, Ductless Outdoor Unit
Rated Cooling Capacity (Btu/hr):	9,000	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Sensible Capacity (Btu/hr):		Rated Piping Length(ft):	49
Max/Min Cooling Capacity (Btu/hr):	10,900 / 3,700	Rated Height Difference (ft):	0.00
Cooling Input Power (kW):	1.350	Heating Input Power (kW):	1.85
SEER2 (Non-Ducted/Ducted):	19.50 /	HSPF2 (Non-Ducted/Ducted):	9.7 /
EER2 (Non-Ducted/Ducted):	12.00 /	Heating COP (Non-Ducted/Ducted):	1.8 /
Rated Heating Capacity (Btu/hr):	12,000	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Max/Min Heating Capacity (Btu/hr):	17,100 / 4,600		

SYSTEM DETAILS

Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	50 - 115
Holding Refrigerant Charge (lbs):	1.74	Heating Operation Range (°F WB):	-14 - 64
Additional Charge (oz/ft):	0.22	Max. Pipe Length (Vertical) (ft):	49
Pre-charge Piping (Length) (ft):	49	Cooling Range w/Baffle (°F DB):	-
Max. Pipe Length (Total) (ft):	66		
Max Height Separation (Ind to Ind ft):	0		
Fan/Compressor Drive Input:	9.0		


Submittal Data Sheet

Daikin AURORA 0.75-Ton, Floor Mount Heat Pump System
FVXV09AVJUT9- RXP09AVJU9

INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Airflow Rate (H/M/L/SL) (CFM):	297/265/201/173
Power Supply Connections:	L1, L2, L3, G	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):		Gas Pipe Connection (inch):	3/8
Max Overcurrent Protection (MOP) (A):		Liquid Pipe Connection (inch):	1/4
Dimensions (HxWxD) (in):	23-5/8 x 29-1/2 x 9-3/8	Condensate Connection (inch):	3/4
Ext. Static Pressure (Rated/Max) (inWg):	/	Sound Pressure (H/M/L/SL) (dBA):	39/36/30/26
Net Weight (lb):	40	Sound Power Level (dBA):	

DIMENSIONAL DRAWING - INDOOR UNIT

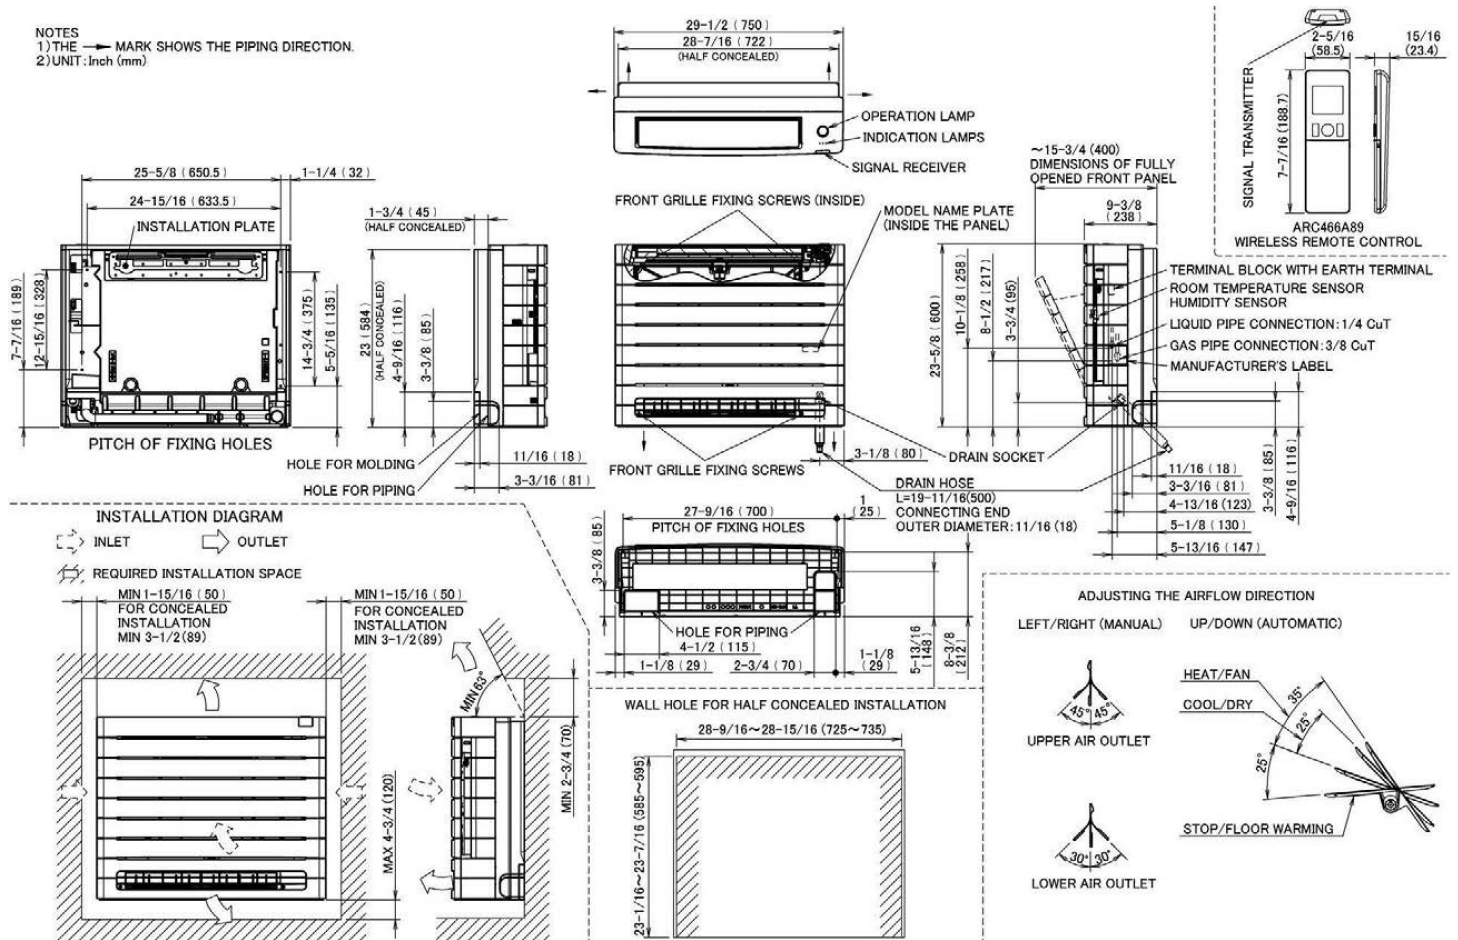


Submittal Data Sheet

Daikin AURORA 0.75-Ton, Floor Mount Heat Pump System
FVXV09AVJUT9- RXP09AVJU9

OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Compressor Stage:	Inverter
Power Supply Connections:		Capacity Control Range (%):	-
Min. Circuit Amps MCA (A):	11.6	Airflow Rate (H/M) (CFM):	1126/1,126
Max Overcurrent Protection (MOP) (A):	15	Gas Pipe Connection (inch):	3/8
Max Starting Current MSC(A):		Liquid Pipe Connection (inch):	1/4
Rated Load Amps RLA(A):		Sound Pressure (H) (dBA):	50
Dimensions (HxWxD) (in):	21-15/16 x 26-9/26 x 11-3/16	Sound Power Level (dBA):	
Net Weight (lb):	72		

DIMENSIONAL DRAWING - OUTDOOR UNIT

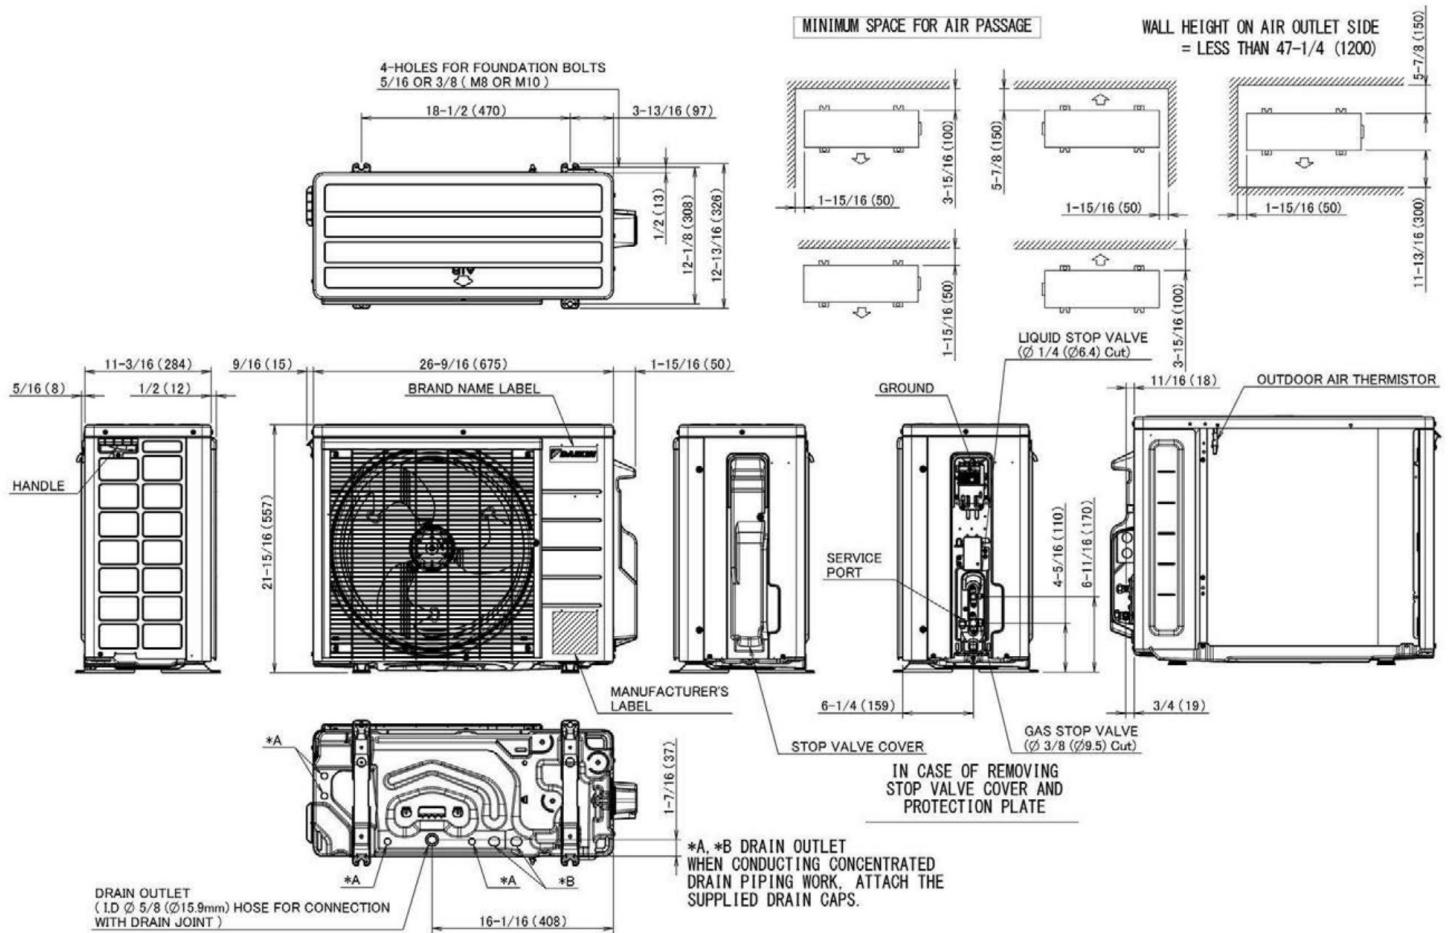



Submittal Data Sheet

Daikin AURORA 0.75-Ton, Floor Mount Heat Pump System
FVXV09AVJUT9- RXP09AVJU9

INDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
BRC073A6	Wired Remote Controller (Requires Additional Wire Harness)	No
DCS302C71	Centralized Controller	No
DST301BA61	Schedule Timer	No
KAF970A46	Titanium apatite photocatalytic air-purifying filter WITHOUT frame	No
KER087A41	S21 conversion connector	No
KRP928BB2S	RA Interface Adaptor for DIII-Net -	No

OUTDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
KEH068A41	Drain Pan Heater	No
KKG067A41	Back protection wire net (09 & 12)	No
KKP937A4	Drain Plug for OD Unit	Yes
KPS067A41	Snow hood (intake side plate) (09 & 12)	No
KPS067A42	Snow hood (intake rear plate) (09 & 12)	No
KPS067A44	Snow hood (outlet) (09 & 12)	No
KPW937F4	Air direction adjustment grille (09 & 12)	No