



Submittal Data Sheet

Daikin AURORA 1.5-Ton, Floor Mount Heat Pump System
FVXV18AVJUT9- RXP18AVJU9

FEATURES

- Automatic defrosting & Automatic cooling/heating change over
- Auto Restart after Power failure
- Operation Range—Cooling (50°F - 114.8°F)
- Low temperature cooling operation down to -4°F (-20°C) with wind baffle and field settings
- Operating Range - Heating (-13.8°F - 64.4°F)
- Built in Wi-Fi
- Built in refrigeration detection system
- POWERFUL mode (quick cooling/heating boost).
- HEAT PLUS mode (high-temperature heating boost, timed operation).
- FLOOR WARMING mode (focuses airflow from the lower outlet).
- ECONO mode (limits maximum power consumption).
- QUIET OUTDOOR UNIT mode (reduces outdoor unit noise).
- Automatic CLEAN mode (fan runs after COOL/DRY to dry the interior).
- HOME LEAVE mode (stores and recalls preferred temperature/airflow).
- Weekly Timer scheduling (multiple on/off events per day across the week) plus on/off and count-up/down timers.
- Airflow controls: selectable air outlet control (Automatic/Upper-only), vertical auto-swing, and multiple fan speed steps (Auto, Quiet, 1-5).
- 12-year limited parts and compressor warranty with online registration
- 5-year limited parts warranty for commercial applications
- Inverter controlled Swing compressor with Reluctance DC motor
- Filter Cleaning Indicator
- Anti-corrosion treatment on outdoor heat exchanger
- Factory charged for up to 49.2 ft of piping length

INDOOR UNIT



BENEFITS

- Faster warm-up comfort with HEAT PLUS high-temperature discharge.
- Warmer, more comfortable floor-level heat distribution using FLOOR WARMING (lower outlet only).
- Cleaner indoor unit and reduce moisture/mold risk with automatic CLEAN drying cycle after COOL/DRY.
- More personalized comfort with HOME LEAVE one-touch preset recall.
- Greater comfort control via user-selectable air outlet selection (Automatic vs Upper-only).
- Softer, quieter comfort near setpoint with optional airflow softening when the set temperature is reached.
- More peace and quiet outside with QUIET OUTDOOR UNIT mode (where noise reduction is desired).
- Better day-to-day convenience with Weekly Timer scheduling to match routines and reduce manual adjustments.
- More comfortable "quick recovery" after setbacks with POWERFUL mode for rapid cooling/heating.
- Potentially lower peak energy use when needed by enabling ECONO mode to limit maximum power.
- Warmer, more comfortable floor-level heat distribution using FLOOR WARMING (lower outlet only).
- Cleaner indoor unit and reduced moisture/mold risk with automatic CLEAN drying cycle after COOL/DRY.
- More personalized comfort with HOME LEAVE one-touch preset recall.
- Greater comfort control via user-selectable air outlet selection (Automatic vs Upper-only).
- Softer, quieter comfort near setpoint with optional airflow softening when the set temperature is reached.

OUTDOOR UNIT





Submittal Data Sheet

Daikin AURORA 1.5-Ton, Floor Mount Heat Pump System
FVXV18AVJUT9- RXP18AVJU9

SYSTEM PERFORMANCE

Indoor Unit Model No.	FVXV18AVJUT9	Indoor Unit Name:	Daikin 1.5-Ton, Floor Mount Indoor Unit
Outdoor Unit Model No.	RXP18AVJU9	Outdoor Unit Name:	Daikin AURORA 1.5-Ton, Heat Pump, Ductless Outdoor Unit
Rated Cooling Capacity (Btu/hr):	17,600	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Sensible Capacity (Btu/hr):		Rated Piping Length(ft):	66
Max/Min Cooling Capacity (Btu/hr):	21,400 / 6,200	Rated Height Difference (ft):	0.00
Cooling Input Power (kW):	1.680	Heating Input Power (kW):	2.53
SEER2 (Non-Ducted/Ducted):	19.50 /	HSPF2 (Non-Ducted/Ducted):	9.5 /
EER2 (Non-Ducted/Ducted):	12.00 /	Heating COP (Non-Ducted/Ducted):	1.8 /
Rated Heating Capacity (Btu/hr):	20,000	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43
Max/Min Heating Capacity (Btu/hr):	21,800 / 8,300		

SYSTEM DETAILS

Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	50 - 115
Holding Refrigerant Charge (lbs):	3.04	Heating Operation Range (°F WB):	-14 - 64
Additional Charge (oz/ft):	0.22	Max. Pipe Length (Vertical) (ft):	66
Pre-charge Piping (Length) (ft):	49	Cooling Range w/Baffle (°F DB):	-
Max. Pipe Length (Total) (ft):	99		
Max Height Separation (Ind to Ind ft):	0		
Fan/Compressor Drive Input:	17.4		


Submittal Data Sheet

Daikin AURORA 1.5-Ton, Floor Mount Heat Pump System
FVXV18AVJUT9- RXP18AVJU9

INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Airflow Rate (H/M/L/SL) (CFM):	448/332/286/240
Power Supply Connections:	L1, L2, L3, G	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):		Gas Pipe Connection (inch):	1/2
Max Overcurrent Protection (MOP) (A):		Liquid Pipe Connection (inch):	1/4
Dimensions (HxWxD) (in):	23-5/8 x 29-1/2 x 9-3/8	Condensate Connection (inch):	3/4
Ext. Static Pressure (Rated/Max) (inWg):	/	Sound Pressure (H/M/L/SL) (dBA):	49/42/38/34
Net Weight (lb):	40	Sound Power Level (dBA):	

DIMENSIONAL DRAWING - INDOOR UNIT

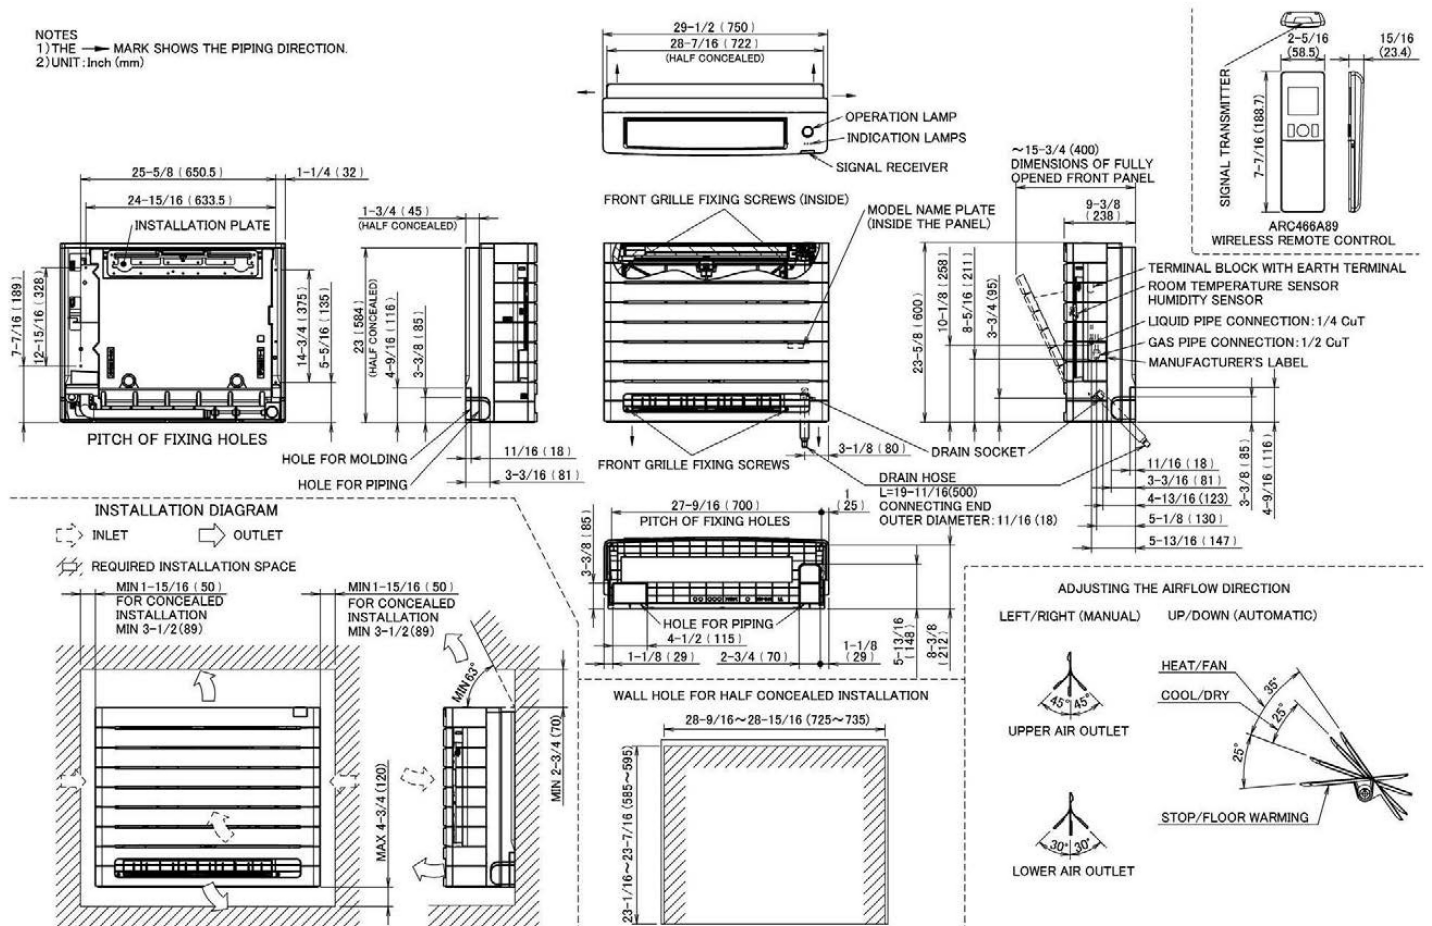


Submittal Data Sheet

Daikin AURORA 1.5-Ton, Floor Mount Heat Pump System
FVXV18AVJUT9- RXP18AVJU9

OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208/230 / 60 / 1	Compressor Stage:	Inverter
Power Supply Connections:		Capacity Control Range (%):	-
Min. Circuit Amps MCA (A):	21.4	Airflow Rate (H/M) (CFM):	2383/2,383
Max Overcurrent Protection (MOP) (A):	25	Gas Pipe Connection (inch):	1/2
Max Starting Current MSC(A):		Liquid Pipe Connection (inch):	1/4
Rated Load Amps RLA(A):		Sound Pressure (H) (dBA):	55
Dimensions (HxWxD) (in):	29-1/2 x 34-1/4 x 12-5/8	Sound Power Level (dBA):	
Net Weight (lb):	127		

DIMENSIONAL DRAWING - OUTDOOR UNIT

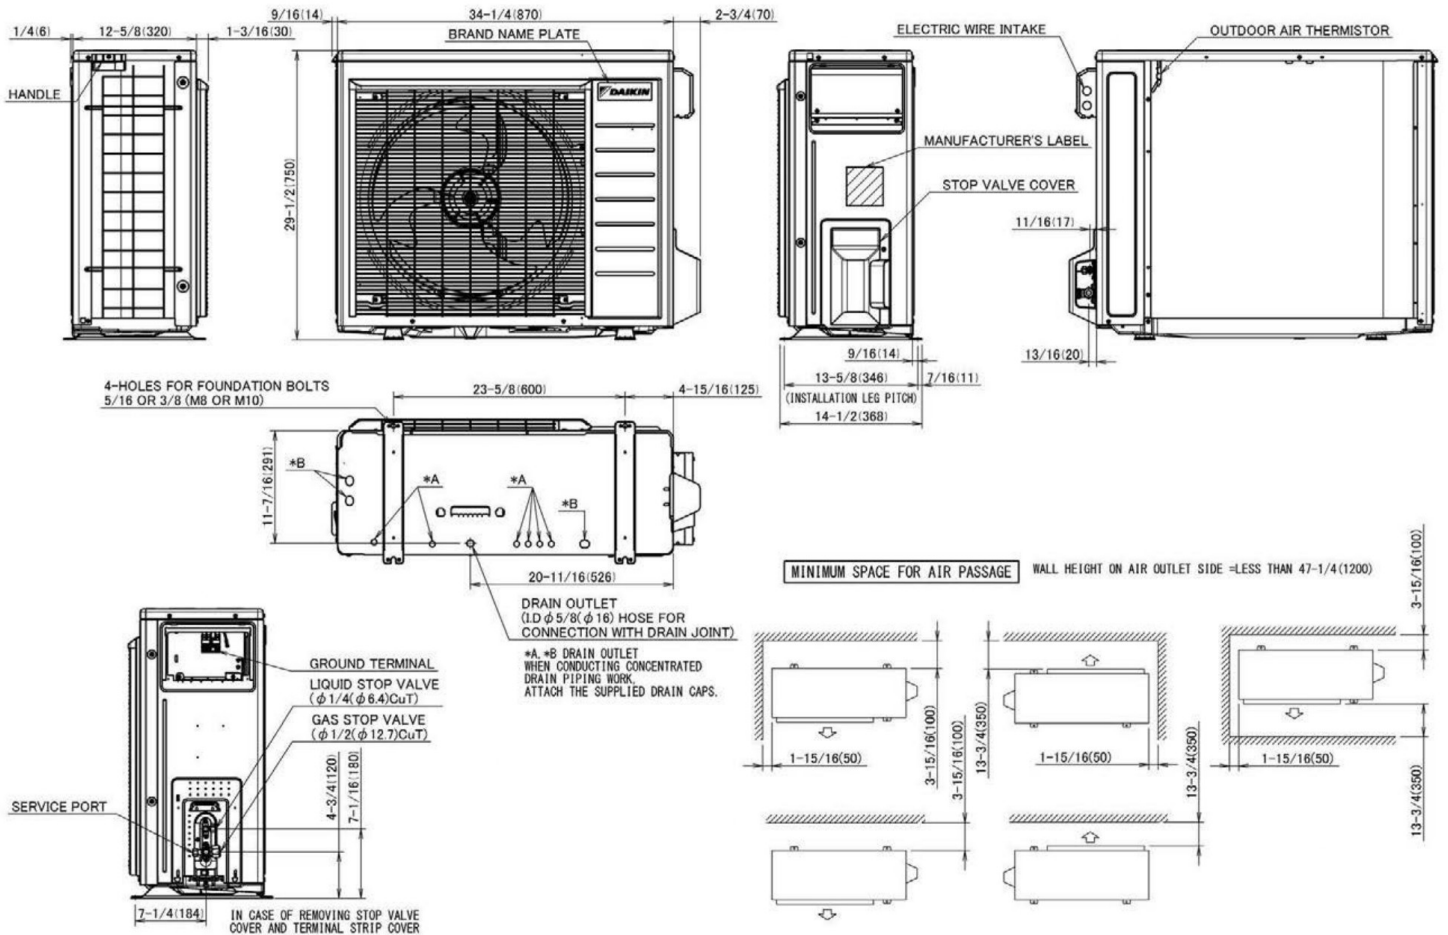



Submittal Data Sheet

Daikin AURORA 1.5-Ton, Floor Mount Heat Pump System
FVXV18AVJUT9- RXP18AVJU9

INDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
BRC073A6	Wired Remote Controller (Requires Additional Wire Harness)	No
DCS302C71	Centralized Controller	No
DST301BA61	Schedule Timer	No
KAF970A46	Titanium apatite photocatalytic air-purifying filter WITHOUT frame	No
KER087A41	S21 conversion connector	No
KRP928BB2S	RA Interface Adaptor for DIII-Net -	No

OUTDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
KEH064A41	Drain Pan Heater	No
KKG063A44	Back Protection Wire Net	No
KKP937A4	Drain Plug for OD Unit	Yes
KPS063A41	Snow hood (intake side plate) (15, 18 & 24)	No
KPS063A44	Snow hood (intake rear plate) (15,18 & 24)	No
KPS063A47	Snow hood (outlet) (15, 18 & 24)	No
KPW063B4	Air direction adjustment grille	No