



Submittal Data Sheet

SkyAir 3.5-Ton HSP Concealed Ducted Heat Pump System

FBA42AAVJU-RZA42AAVJU

BENEFITS

- Medium external static pressure (ESP) capabilities offer up to 0.8" W.G.
- Connect to Daikin Zoning Kit (Optional)
- Dependable heat pump operation from -4°F in heating to 122°F in cooling
- DC Fan Motor
- Minimal Discharge Air Temperature - mitigate risk of condensation
- Auto Adjusting Airflow at commissioning based on external static pressure
- Ease of Maintenance with complete service access from below
- Built in Refrigerant Detection System with Dispersion Mode

INDOOR UNIT



OUTDOOR UNIT





Submittal Data Sheet

SkyAir 3.5-Ton HSP Concealed Ducted Heat Pump System
FBA42AAVJU-RZA42AAVJU

SYSTEM PERFORMANCE

Indoor Unit Model No.	FBA42AAVJU	Indoor Unit Name:	SkyAir 3.5-Ton HSP Concealed Ducted Indoor Unit
Outdoor Unit Model No.	RZA42AAVJU	Outdoor Unit Name:	SkyAir 3.5 Ton, Heat Pump Outdoor Unit
Rated Cooling Capacity (Btu/hr):	40,500	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Sensible Capacity (Btu/hr):	30,500	Rated Piping Length(ft):	25
Max/Min Cooling Capacity (Btu/hr):	/	Rated Height Difference (ft):	0.00
Cooling Input Power (kW):	3.860		
SEER2 (Non-Ducted/Ducted):	/ 15.60	HSPF2 (Non-Ducted/Ducted):	/ 9.5
EER2 (Non-Ducted/Ducted):	/ 10.50		
Rated Heating Capacity (Btu/hr):	47,000	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 60 Ambient (°F DB/WB): 47 / 43

SYSTEM DETAILS

Refrigerant Type:	R-32	Cooling Operation Range (°F DB):	23 - 122
Holding Refrigerant Charge (lbs):	7.5	Heating Operation Range (°F WB):	-4 - 60
Additional Charge (oz/ft):	0.56	Max. Pipe Length (Vertical) (ft):	98
Pre-charge Piping (Length) (ft):	25	Cooling Range w/Baffle (°F DB):	23 - 122
Max. Pipe Length (Total) (ft):	230		
Max Height Separation (Ind to Ind ft):	0		

Submittal Data Sheet


SkyAir 3.5-Ton HSP Concealed Ducted Heat Pump System

FBA42AAVJU-RZA42AAVJU

INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Airflow Rate (H/M/L) (CFM):	1377/1,130/918
Power Supply Connections:	T1, T2	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):	3.6	Gas Pipe Connection (inch):	5/8
Max Overcurrent Protection (MOP) (A):	15	Liquid Pipe Connection (inch):	3/8
Dimensions (HxWxD) (in):	9-11/16 x 55-1/8 x 31-1/2	Condensate Connection (inch):	1-1/4
Ext. Static Pressure (Rated/Max) (inWg):	/	Sound Pressure (H/M/L) (dBA):	48/44/39
Net Weight (lb):	106	Sound Power Level (dBA):	

DIMENSIONAL DRAWING - INDOOR UNIT

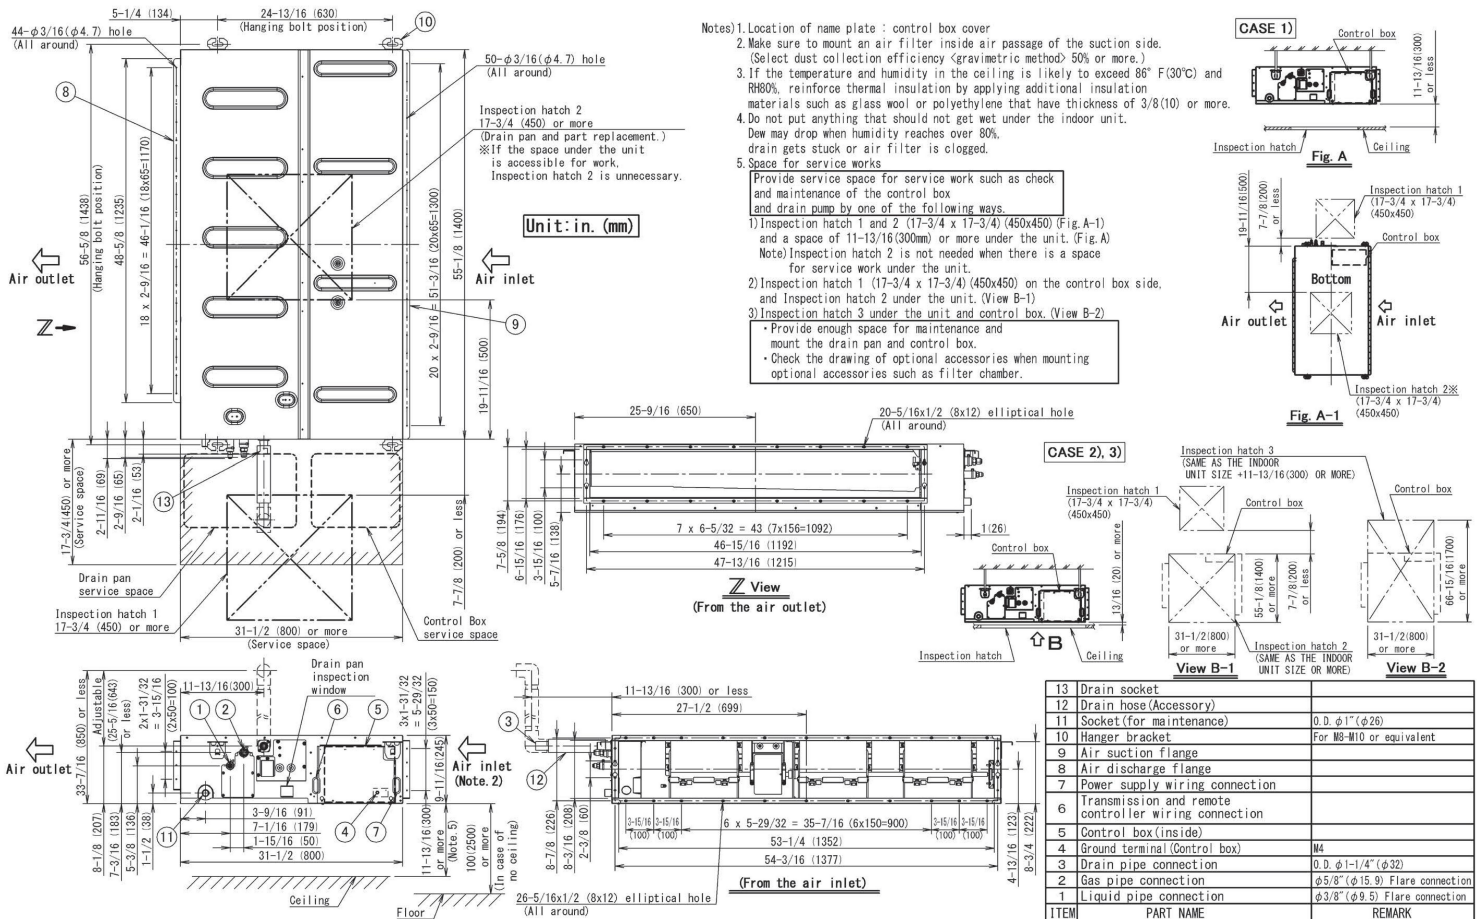


Submittal Data Sheet

SkyAir 3.5-Ton HSP Concealed Ducted Heat Pump System
FBA42AAVJU-RZA42AAVJU

OUTDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Compressor Stage:	Inverter
Power Supply Connections:	H1, H2	Capacity Control Range (%):	-
Min. Circuit Amps MCA (A):	34.6	Airflow Rate (H) (CFM):	3000
Max Overcurrent Protection (MOP) (A):	35	Gas Pipe Connection (inch):	5/8
Max Starting Current MSC(A):		Liquid Pipe Connection (inch):	3/8
Rated Load Amps RLA(A):		Sound Pressure (H) (dBA):	56
Dimensions (HxWxD) (in):	34-1/4 x 43-5/16 x 18-1/8	Sound Power Level (dBA):	
Net Weight (lb):	234		

DIMENSIONAL DRAWING - OUTDOOR UNIT

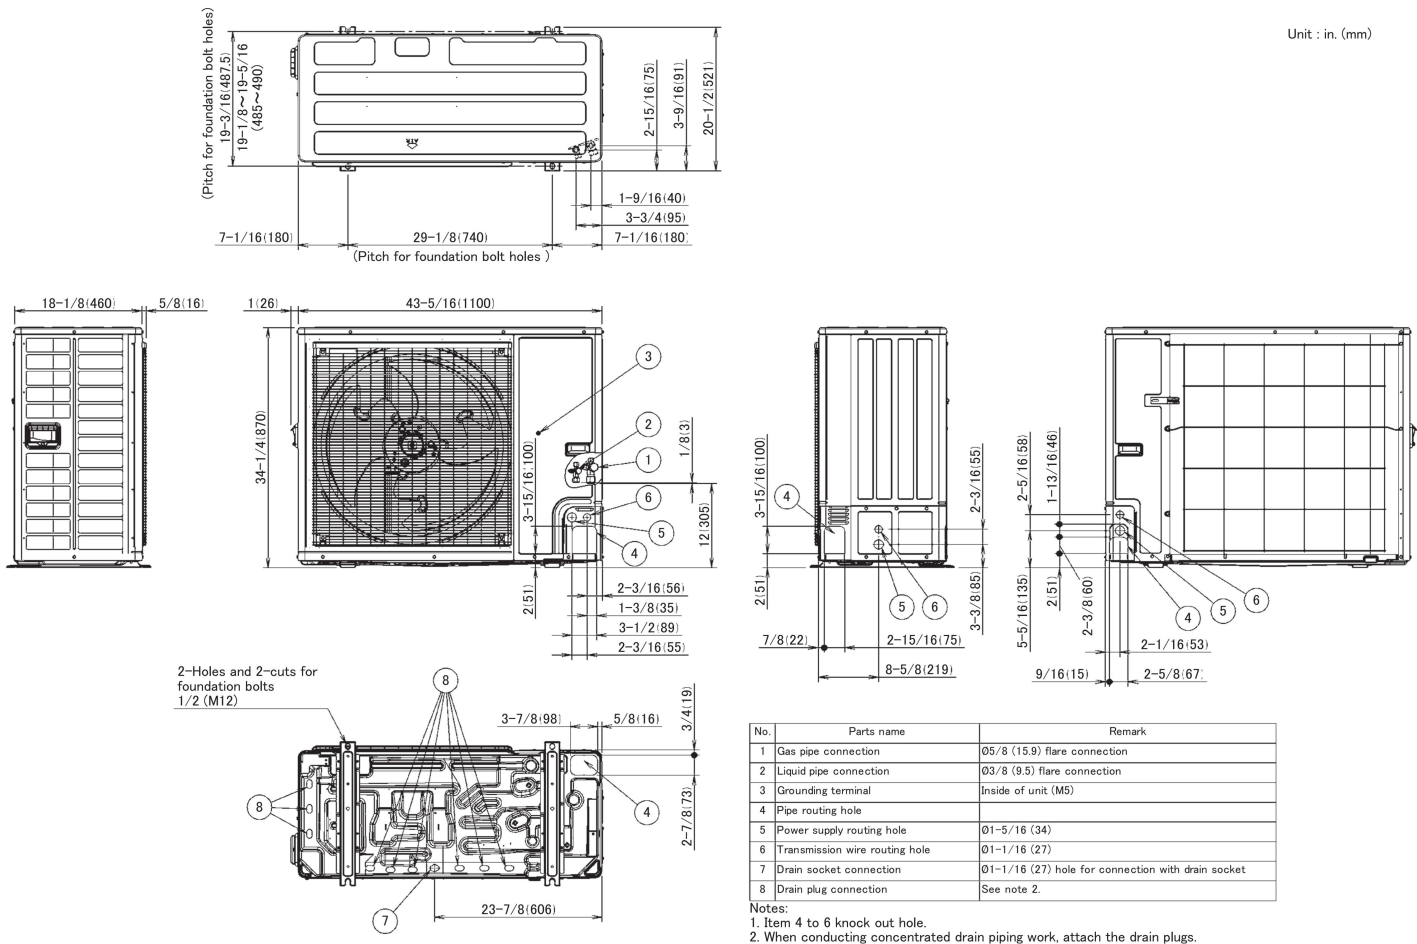



Submittal Data Sheet

SkyAir 3.5-Ton HSP Concealed Ducted Heat Pump System

FBA42AAVJU-RZA42AAVJU

INDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
BRC1NRV71	R32 Navigation Remote Controller	No
BRP9A73	Ventilation and alarm adapter	No
DACA-CP3-1	Si-30 Condensate Pump	No
KRCS01-6B	Remote Sensor	No
KRP1C76	Wiring Adapter PCB	No
KRP4A71	Group Control Adaptor PCB	No
KRP4A98	Mounting plate for accessory PCB	No

OUTDOOR ACCESSORIES

PART NUMBER	DESCRIPTION	INCLUDED
BRP2A82	ABC Terminal for VRV IV S	No
KEH042A41A	Drain Pan heater for single phase VRVs and SkyAir	No
KPW082A41	Air direction adjustment grille	No
KRC19-26A6	COOL/HEAT SELECTOR	No