

Hi-UNI Outdoor Unit Matched with Slim Duct

**Inverter Heat Pump 19 SEER2 and 9.5 HSPF2
24,000 BTU/H Cooling Capacity and 24,000 BTU/H Heating Capacity**

Indoor Unit Model	ADU-24U3T25U	Outdoor Unit Model	AOU-24U3T25U
Job Name:	Location:	Date:	
Engineer:	Submitted to:	Submitted by:	
Approval:	Construction:	Unit #:	
Reference:	Drawing #:		

Equipment Features:

OUTDOOR UNIT

- * **Efficiency and comfort:** Up to 19 SEER2 / 11.7 EER2 / 9.5 HSPF2
- * **Low Ambient Performance:** Confirmed continuous operation as low as -13°F (-25°C) ambient temperature.
- * Low-GWP EPA **R454B** Refrigerant
- * **Base Pan Heater & Crankcase Heater** installed for stable operation in extreme conditions.
- * **Gold Fin™ anti-corrosion heat exchanger and insect-proof electronics box** for long-lasting durability.
- * Outdoor **Intelligent defrost** tech improves system efficiency and reliable operation



HS-WC02U



INDOOR UNIT

- * **Integrated Wi-Fi** plus the Connectlife smart app ,put easy operation right at your fingertips.
- * **Built-in A2L Safety Sensor** - Ensures safety for both homeowners and technicians
- * **Ultra-Slim Cabinet-** 9K and 12K ducted units feature a cabinet height of **7.48 inches** for low-clearance ceiling installations
- * **External static pressure** is adjustable via wired controller with **1 Pa** increment for precise airflow matching
- * **Built-in Condensate Pump:** Includes an internal condensate pump with a maximum lift of 47 in
- * **Drain Safety Protection-**A float switch monitors condensate level and shuts down the unit in the event of pump failure or drain blockage
- * **Selectable Air Return-** supports rear or bottom air return configurations to accommodate various installation layouts
- * Self-cleaning indoor with **Hisense FrostClean™ technology** to reduce dust and bacteria for a healthier home
- * **Temperature Compensation Function** -can be configured via controller to maintain comfort in high-ceiling applications



Certifications



Scan the QR code to explore more

product improvements, specifications are subject to change without notice.
Please log in to the www.HisenseComfort.com/Hi-Tech APP for the most up-to-date

Version: 20260702

Controller Options

Model No :HS-WC01U/HS-WC02U
Hisense 12V Smart Thermostat
Model No :RCH-RTY4-2



Warranty* Requires registration-some restrictions apply

UP TO 10 YEAR PARTS UP TO 2 YEAR LABOR UP TO 2 YEAR UNIT



www.HisenseComfort.com

SPECIFICATIONS

AHRI Certificate #	216498639		
Indoor Unit	ADU-24U3T25U		
Outdoor Unit	AOU-24U3T25U		
Efficiency and Performance			
SEER2	Btu/ (W.h)	19.0	
EER2	Btu/ (W.h)	11.7	
HSPF2	Btu/ (W.h)	9.5	
COP @ 5°F	W/W	2.0	

Cooling Performance @ 95°F		
Rated Capacity	BTU/H	24000
Min.-Max. Capacity	BTU/H	9000~31500
Rated Power Input	W	2050
Min.-Max. Power Input	W	560~3320
Moisture Remova	Pints/h	4.31
Sensible Heat Factor	/	0.72
Power Factor [230V]	%	99

Heating Performance		
Heating @ 47°F Rated Capacity	BTU/H	24000
Heating @ 47°F Min.-Max. Capacity	BTU/H	7600~37500
Heating @ 47°F Rated Power Input	W	2050
Heating @ 47°F Min.-Max. Power Input	W	460~3450
Power Factor [208V / 230V]	%	99
Heating @ 17°F Rated Capacity	BTU/H	18200
Heating @ 17°F Max Capacity	BTU/H	20700
Heating @ 5°F Max Capacity	BTU/H	24000
Heating @ -13°F Rated Capacity	BTU/H	16100

Cooling Nominal Test Conditions:Indoor: 80°F DB / 67°F WB Outdoor: 95°F DB / 75°F WB.

Heating Nominal Test Conditions: Indoor: 70°F DB / 60°F WB Outdoor: 47°F DB / 43°F WB

Standard Operating Range (°F/°C)	
Indoor Cooling	"61 to 86 (16 to 30)
Indoor Heating	"61 to 86 (16 to 30)
Outdoor Cooling	"5 to 125 (-15 to 52)
Outdoor Heating	"-13 to 75 (-25 to 24)
# System has no low temperature cut out. Capacity is not tested outside of the rated temperature range.	

Electrical Data		
System power supply		
Voltage, Hertz,Phase	V AC	208/230V,60Hz,1Ph
Available Voltage Range	V AC	187—264
Cooling / Heating Rated Amps (A)	(A)	9.4~9.2
Power Supply IDU	Powered by the Outdoor Unit	
Communication Wiring Size AWG	4×16	
Power Cable Size AWG	Outdoor 3×12	
Recommended Fuse/Breaker Size (Outdoor)	Outdoor 25	
Short-Circuit Current Rating [SCCR]	KA	0.4(250Vac)
Rated Current Load [Cooling - Heating]	A	9.4~9.2

Outdoor Piping and Refrigerant		
Liquid Pipe Size O.D. 【 Flared】	In. (mm)	Ø3/8 (Ø9.52)
Gas Pipe Size O.D. 【 Flared】	In. (mm)	Ø5/8 (Ø15.88)
Maximum Piping Length	Ft. (m)	165(50)
Maximum Height Difference	Ft. (m)	98(30)
Refrigerant Type	/	R454B
Pre-Charged Refrigerant Amount	oz(kg)	74.1 (2.1)
Max. Pre-Charged Piping Length	Ft. (m)	25(7.6)
Additional Refrigerant Charge Per Additional Piping Length	(oz/ft). (g/m)	0.38 (35.34)

Version: 20260702

Specifications are subject to change without notice

www.HisenseComfort.com

Indoor Unit Specifications		
MCA	A	1.8
MCA - Minimum Circuit Ampacity	MOP - Maximum Overcurrent Protection	
Indoor fan motor		
Model	/	ZWF-210H
Type	/	DC Motor
Motor Output	HP	"2/7
Full Load Amps (FLA)	A	1.45
Indoor Fan Airflow Rated		
Cooling (H/M/L)	CFM	735/647/559
	m3/h	1250/1100/950
Indoor Sound Pressure Level		
Cooling (H)	dB (A)	53
ESP (External Static Pressure)		
Rated	Pa~in-H2O	145~0.58
Range	Pa~in-H2O	0~165 / 0~0.66
Others		
Drain Pipe Size	In. [mm]	1-1/4 [dΦ32]
Fin and Tube Type	Hydrophilic Aluminum / Copper	
Coating on Heat Exchanger	Type	BlueFin™


Dimensions		
Unit Dimensions (W×D×H)	In	43-1/4×27-1/2×9-5/8
	mm	1100×700×245
Package Dimensions (W×D×H)	In	50-3/8×31-7/8×12-3/8
	mm	1280×810×315
Indoor Net Weight	Lbs. (kg)	73.9 [33.5]
Indoor Package Weight	Lbs. (kg)	84.9 [38.5]

Outdoor Unit Specifications		
MCA	A	22
MOCP	A	25
Compressor		
Type	/	Inverter Twin ROTARY
Capacity	Btu/h	27705
Input	W	2575
Rated Current Amps (RLA)	A	10.8
Compressor Oil Type/Amount	ml (oz.)	FV68S-900/30.43
ODU Refrigerant Control	Type	EEV
Outdoor Fan Motor		
Model	/	ZWB278L46A
Type/Qty	/	DC/1
Motor Output	HP	"1/6
Full Load Amps (FLA)	A	0.8
Outdoor Fan Airflow Rate		
Cooling (H)	CFM	2235
	m3/h	3800
Outdoor Fan Speed		
Cooling (H)	r/min	870
Outdoor Sound Pressure Level		
Cooling (H/M/L)	dB (A)	56
Others		
Fin Type /Tube Type	Hydrophilic Aluminum / Copper	
Coating on Heat Exchanger	Type ~ Hours	GOLD~1500
Base Pan Heater	As standard	
Crankcase Heater	As standard	

Dimensions		
Unit Dimensions (W×D×H)	In	35-3/8×13-3/8×29-1/2
	mm	900×340×750
Package Dimensions (W×D×H)	In	41×18-1/8×32-5/8
	mm	1040×460×830
Outdoor Net Weight	Lbs. (kg)	123.4 [56]
Package Weight	Lbs. (kg)	132.4 [60]

Indoor Unit Dimensions

Unit: in.(mm)

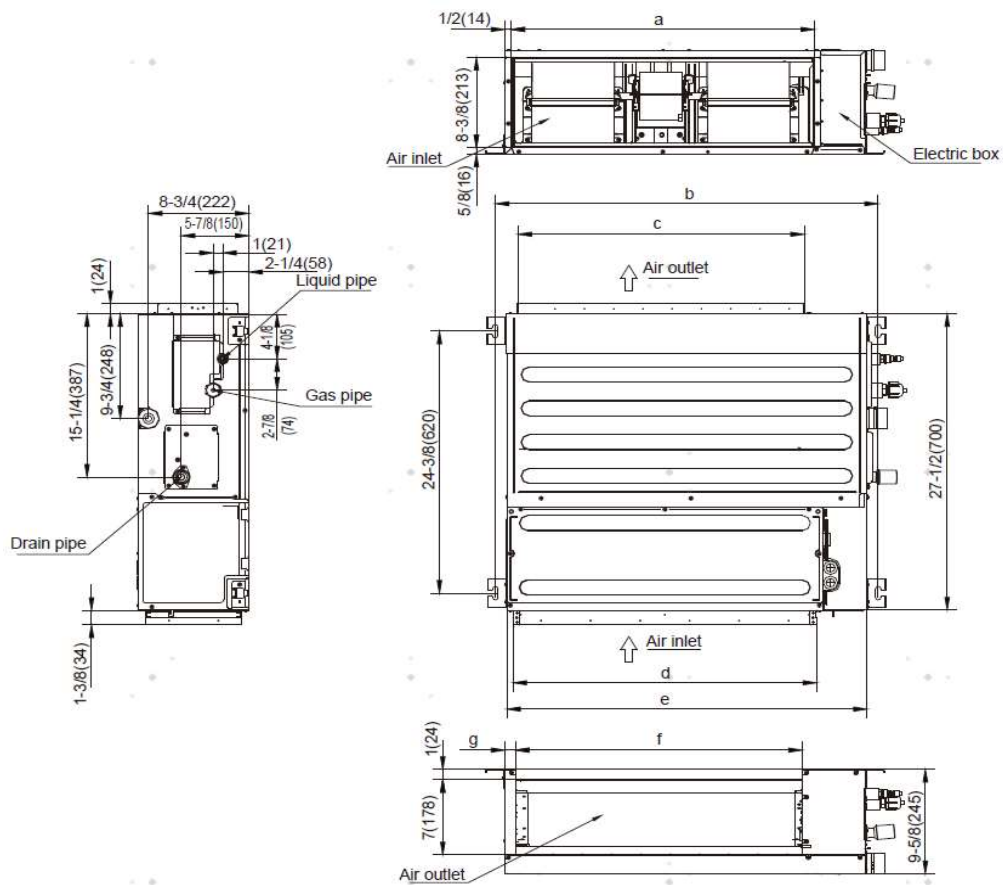

Model(Btu/h)	a	b	c	d	e	f	g
18K	26-1/2 (674)	33-1/2 (850)	25 (636)	26-1/2 (673)	31-1/2 (800)	25 (636)	1 (24)
24K	38-3/8 (974)	45-1/4 (1150)	35-7/8 (912)	38-1/4 (973)	43-1/4 (1100)	35-7/8 (912)	1-7/8 (49)


Version: 20260702

Specifications are subject to change without notice

www.HisenseComfort.com

Outdoor Unit Dimensions

Unit: in.(mm)

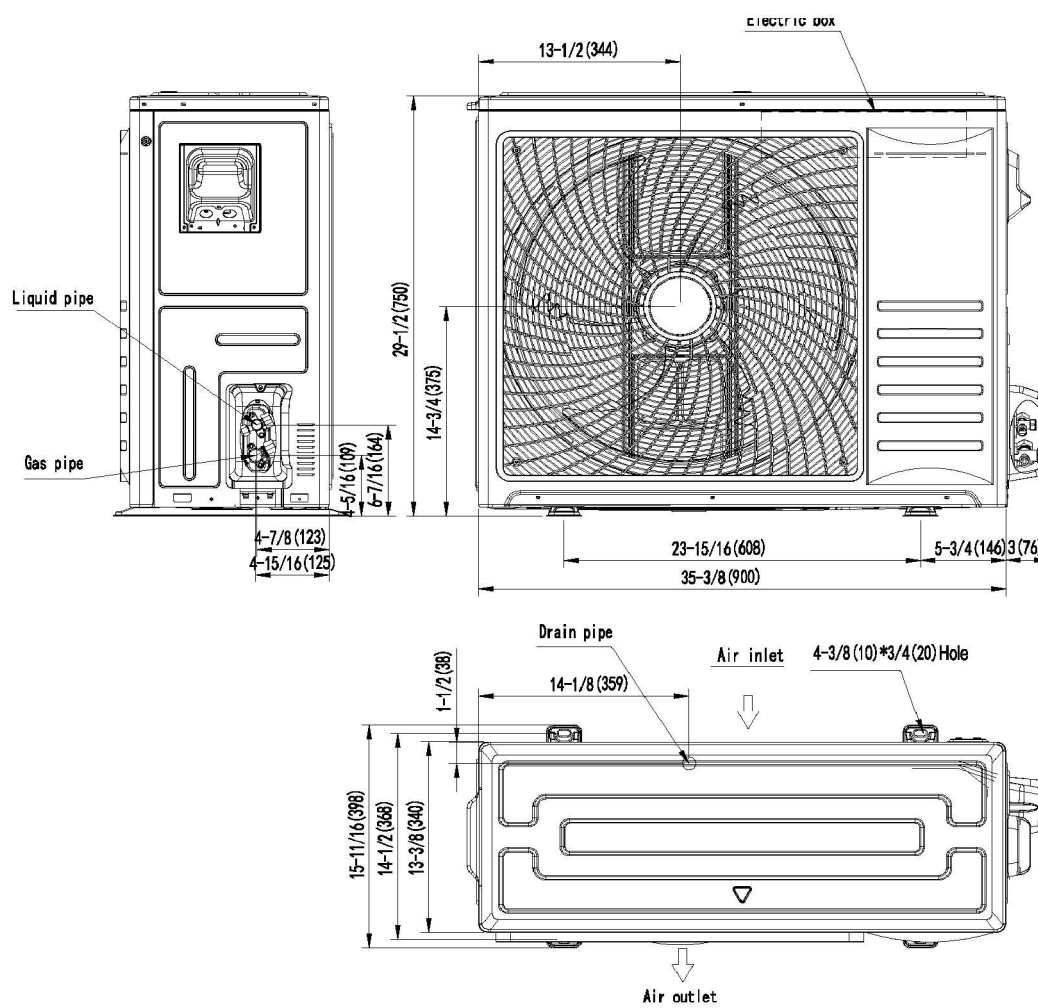

Version: 20260702

Specifications are subject to change without notice

www.HisenseComfort.com

WIRELESS REMOTE CONTROLLER



1 VERTICAL SWING

Controls vertical louver swing and allows customization of up-and-down airflow direction.



2 FAN / LOCK

Cycles through fan speed settings (Auto, High, Medium, Low). Press and hold for 5 seconds to activate or deactivate the child lock function.



3 FRESH / QUIET

This button enables activation and deactivation of Fresh Mode and Quiet Mode: a single press turns on Fresh Mode to bring fresh air indoors, while a 5-second long press lowers compressor and fan speeds for quiet operation.



4 TIMER ON / CLOCK

Allows setting or canceling timer functions, as well as configuring the current time.



5 AIRFLOW FOLLOW / AVOID YOU

Activate or deactivate the air follow you or avoid you function, wind follow you mode brings cooler wind, avoid you mode eliminates the discomfort caused by air blowing directly at you.

*This feature is only applicable to Ductless system



6 HORIZONTAL SWING

Controls horizontal louver swing and allows you to set the desired left and right airflow direction.

*This feature is only applicable to Ductless system



7 AUTO

Enables AI Auto Mode to automatically adjust operating mode, temperature, wind speed, wind direction and humidity based on indoor ambient conditions, delivering optimal comfort.



8 SUPER

Press the Super button to run the air conditioner at maximum power and airflow regardless of ambient temperature for rapid cooling or heating.

VERTICAL SWING 1

FAN / LOCK 2

FRESH / QUIET 3

TIMER ON / 4

CLOCK

AIRFLOW FOLLOW / 5
AVOID YOU

HORIZONTAL SWING 6

AUTO 7

SUPER 8

I FEEL / 8°C (46°F) HEAT 9

SLEEP / DIMMER 10

LOUVER 12

TIMER OFF / ECO 11

CLEAN 13



*The brand-new RCH-RTY4-2 wireless controller will replace the original RCH-RTY6 and RCH-RTY4-0 Wireless Controllers.



9 I FEEL / 8°C (46°F) HEAT

This button controls iFEEL Mode and 8°C (46°F) Heating Mode. When iFEEL Mode is activated, the unit takes readings from the remote controller's sensor rather than the indoor unit. Please ensure the remote controller is placed within good signal reception range.



10 SLEEP / DIMMER

Enables setting and canceling Sleep Mode. Press and hold the button for 5 seconds to activate Dimmer mode, and press again for 5 seconds to deactivate it.



11 TIMER OFF / ECO

Allows setting or canceling timer functions, and enables activation or deactivation of Economy Mode.



12 LOUVER

Precision airflow adjustment with independent louver settings or fine-tune each louver individually. Customize angles or enable auto swing for targeted or wide-range airflow.

*This feature is only applicable to Cassette



13 CLEAN

Press this button to enable self-cleaning mode. Adopting Hisense patented indoor self-cleaning technology, it efficiently removes dust, bacteria, microorganisms, oil stains and more for deep cleaning and healthier air supply.

Version: 20260702

Specifications are subject to change without notice

www.HisenseComfort.com

WIRED REMOTE CONTROLLER



Large **LCD Display** for EZ read and control



24h Real Timer and **Weekly Timer** setting



Eliminate the feeling of being cold
Reduce power consumption

HS-WC01U
HS-WC02U



❖ **Signal receiver** of Remote Control – **only HS-WC01U**

❖ **Central Controller** for Max. 16 units - **only HS-WC01T**

Button Description

1. ON/OFF BUTTON

The appliance will be started or stopped when this button is pressed.

2. RUN INDICATOR

Indicates that the appliance is on.

3. MODE BUTTON

Press this button to select the operation mode.

4. FAN BUTTON

Used to select fan speed in sequence high-auto-low-medium-high.

5. SWING BUTTON

Used to stop or start the adjustment louver swinging and set the desired airflow direction.

6. TIMER/CLOCK BUTTON

Used to set the current time or set timer on/off.

7. SLEEP BUTTON

Used to set or cancel Sleep Mode operation.

8. ENTER BUTTON

Used to confirm settings.

9. CANCEL BUTTON

Used to cancel settings.

10. ADD. FUNC. BUTTON

Used to set filter clean, hot water, fresh air, electric heater, etc.

11. INCREASE SETTING BUTTON

Used to raise the set temperature;

It raise the values when setting.

12. DECREASE SETTING BUTTON

Used to lower the set temperature;

It lower the values when setting.

13. LIQUID CRYSTAL DISPLAY(LCD) SCREEN

Used to display indicator screens.

14. BUILT-IN INFRARED SIGNAL RECEIVER

Used to receive infrared signal.

Version: 20260702

Specifications are subject to change without notice

www.HisenseComfort.com