

Hisense Hi EDGE Heat Pump 19.50 SEER2 and 9.00 HSPF2

Hisense

Submittal Data:

AO-24U3R25E & AO-24U3R26E2 Heat Pump and AS-24U3RHB25E Wall-Mounted IDU
24,000 BTU/H Cooling Capacity and 24,000 BTU/H Heating Capacity
R32 Refrigerant System - Low GWP EPA Compliant Product

Job Name:		Location:	
Purchaser:		Date:	Engineer:
Submitted to:		Submitted by:	
Other / Notes:		FOR: ☐ File ☐ Resubmit ☐ Approval ☐ Other	

Equipment Features:



AS-24U3RHB25E



RCH-RTY5-0



ODU Appearance
Feature Release : AO-24U3R26E2

Currently Available : AO-24U3R25E

Outdoor Unit

- **Efficiency and comfort:** Up to 19.5 SEER2 / 10.6 EER2 / 9 HSPF2
- **Low Ambient Performance:** Confirmed continuous operation down to -4°F (-20°C) ambient temperature.
- **Low-GWP R32 EPA Refrigerant**
- **Base Pan Electric Heater** installed for stable operation in extreme conditions.
- **BLUE Fin Anti-Corrosion Heat Exchanger** and Insect-Proof electronics box design for long-lasting reliability.
- Outdoor **Intelligent defrosting tech** improves system efficiency and reliable operation.

Indoor Unit

- **Quick and easy installation** with mounting bracket and detachable IDU base plate.
- **Integrated Wi-Fi with ConnectLife™ app** for convenient control.
- **Built-in A2L Safety Sensor** – Ensures safety for both homeowners and technicians.
- **Blue-Fin Anti-Corrosion Heat Exchanger**, 1,000-hour salt-spray tested for extended life and increase performance.
- **4-Way Air Flow** for optimized comfort.
- Easily accessible and washable **High Definition Filter** for improved air quality and maintenance.
- **Self-cleaning indoor unit with Hisense FrostClean™ technology**, reducing dust and bacteria for a healthier home.
- **Whisper-Quiet Operation** with noise level as low as 28 dB(A).
- **"I Feel" Mode** allows temperature control based on the remote location instead of the indoor unit.
- **Display Dimmer** turns off both displays to eliminate lighting at night.
- **Child-Safe Finger Guards** to protect small hands from indoor fan.
- Contact your local Hisense Partner for complete list of accessories

Cooling at 95°F (35°C)	Maximum Capacity	Btu/h	25,000
	Rated Capacity	Btu/h	24,000
	Minimum Capacity	Btu/h	8,000
	Maximum Power Input	W	2450
	Rated Power Input	W	2270
	Moisture Removal	Pints/h ~ L/h	3.5~2.0
	Sensible Heat Factor	multiplier	0.78
Heating at 47°F (8.3°C)	Power Factor (208V / 230V)	%	99%
	Maximum Capacity	Btu/h	25,000
	Rated Capacity	Btu/h	24,000
	Maximum Power Input	W	2340
	Rated Power Input	W	2130
Heating at 17°F (-8.3°C)	Power Factor (208V / 230V)	%	99%
	Maximum Capacity	Btu/h	21,500
	Rated Capacity	Btu/h	20,800
	Maximum Power Input	W	3100
	Rated Power Input	W	2900

Cooling Nominal Test Conditions: Indoor: 80°F DB / 67°F WB Outdoor: 95°F DB / 75°F WB.

Heating Nominal Test Conditions: Indoor: 70°F DB / 60°F WB Outdoor: 47°F DB / 43°F WB

Heating at 5°F (-15°C)

Version: 20260601

Submittal Data Continued: AO-24U3R25E & AO-24U3R26E2 Heat Pump and AS-24U3RHB25E Wall Mount IDU

Heating at 5°F (-15°C)	Maximum Capacity	Btu/h	18,200
	Maximum Power Input	W	2800
Heating at -4°F (-20°C)	Maximum Capacity	Btu/h	16,000
Heating at -13°F (-25°C)	Maximum Capacity	Btu/h	N/A
Efficiency	SEER2	Information	19.5
	EER2	Information	10.6
	HSPF2 [I/V]	Information	9
	COP at 47°F ~ (-8.3°C) Rated Capacity	Information	3.30
	COP at 17°F ~ (-8.3°C) Rated Capacity	Information	2.10
	COP at 5°F ~ (-15°C) Maximum Capacity	Information	1.9
Electrical	ENERGY STAR™	Information	NO
	Voltage, Phase, Hertz	Information	208V/230V, 1, 60
	Required Voltage Range	V AC	187~253
	Voltage - Indoor IDU	V AC	208V/230V, 1, 60
	Power Supply IDU	V AC	Powered by the Outdoor Unit
	MCA-Indoor Unit	A	3
	MCA-Outdoor Unit	A	21
	MPCP or Recommended Outdoor Fuse \ Breaker Size	A	Outdoor: 25A
Indoor Unit	Recommended Wire Size [Power/ Communication]	AWG-#	12*3/ 18*4
	Fan Motor Full Load Amperage	A	0.42
	Fan Motor Type	Information	Cross-flow fan/DC/45
	Air Flow Rate Cooling (U-H-M-L-S)	m³/h / CFM	1200/1100/950/750/700 706/647/500/441/412
	Cooling speed(Super/High/Mid/Low)	r/min	1180/1100/950/850
	Heating speed(Super/High/Mid/Low)	r/min	1150/1100/950/800
	Sound Pressure Levels Cooling (U-H-M-L-S)	(±1 dB[A])*	49/46/39/37/33
	Sound Pressure Levels Heating (U-H-M-L-S)	(±1 dB[A])*	49/46/39/37/33
	Drain Pipe Size	In. [mm]	3/4(19)-O.D
	Coating on Heat Exchanger - Fin Salt Spray Test	Type ~ Hours	Blue ~ 1000
	Net IDU Weight	Lbs. ~ kg	29~13
Outdoor Unit	Rated Load Amps	A	0.47
	Fan Motor Type	Type ~ W	Propeller fan ~60
	Refrigerant Metering Control	Type	Capillary Throttle Valve
	Coating on Heat Exchanger - Fin Salt Spray Test	Type ~ Hours	Blue ~ 1000
	Outdoor air flow (H/M/L)	m³/h / CFM	3200/2100/1400- 1882/1235/824
	Sound Pressure Cooling Mode (ISO 3745)	(±1 dB[A])*	60
	Base Pan Heater	Feature	Included Standard Option
	NET ODU Weight	Lbs. ~ kg	101.4 ~ 46
Outdoor Unit (Cont.)	Compressor Type and Control	Type	Rotary-INVERTER
	Compressor Oil [Type ~ Charge]	PVE ~ oz. / mL	ESTER OIL VG74~18.94/560
	Rated Current Load [Cooling - Heating]	A	10.0 - 9.5
Refrigerant Piping and Volume	Refrigerant Type (GWP)	Type	R32 (675 GWP)
	Refrigerant Charge in System	oz. / g	47.66/1350
	Pipe Length No Additional Refrigerant	ft. / m	24.61/7.50
	Additional Refrigerant	oz/ft ~ g/m	0.32~ 30
	Minimum Pipe Length~Maximum Pipe Length	ft/m ~ ft/m	13.12/4~98.43/30
	Maximum Height Difference (ODU to IDU)	ft. / m	49.21 / 15
	Liquid Line	in. OD	3/8
Operating Temperature Range	Vapor Line	in. OD	5/8
	Ambient Cooling [Minimum ~ Maximum]	°F / °C	(5~118)/(-15~48)
	Ambient Heating [Minimum ~ Maximum]	°F / °C	(-4~75)/(-20~24)
	Indoor Cooling [Minimum ~ Maximum]	°F / °C	(61~86)/(16~30)
# The system has low-temperature cutout. Capacity is not tested outside of the rated temperature range.	Indoor Heating [Minimum ~ Maximum]	°F / °C	(61~86)/(16~30)
Product Warranty	Residential application (requires registration; some restrictions apply)	Information	10 Years Parts
		Information	1 Year Labor
		Information	Up to 1 Year Unit Replacement

Specifications are subject to change without notice

Version: 20260601


Certifications:



Indoor Unit Dimensions:

Hisense

Unit: inch (mm)

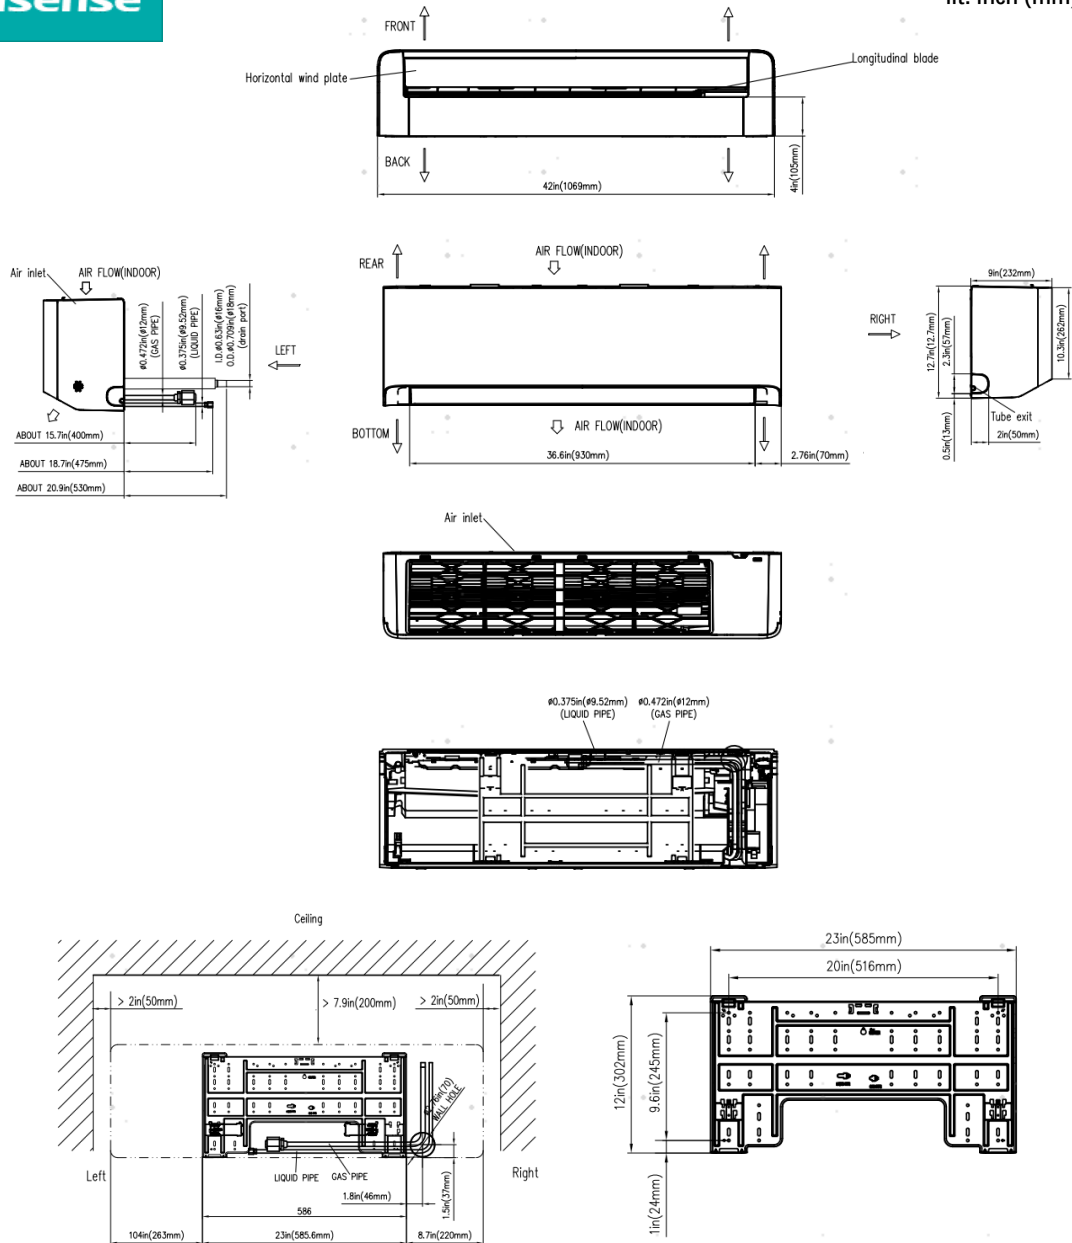

Note: Liquid Pipe Size and Gas Pipe Size are subject to the Specifications
Specifications are subject to change without notice
Version: 20260601

Hisense

12. 21 in (310mm)

OUTDOOR AIR THERMISTOR

1.14in (29mm)

6.46 in (164 mm)

4.29 in (109 mm)

GROUND TERMINAL

5.99 in (152mm)

LIQUID STOP VALVE CUT

GAS STOP VALVE CUT

33. 88 in (860mm)

12. 29 in (312mm)

36.88 in (936 mm)

21. 67 in (550mm)

21.35 in (542 mm)

DRAIN
Ø0.71in(Ø18mm)

DRAIN OUTLET

1.97 in (50mm)

13. 44in (341mm)

1.97 in (50mm)

Version: 20260601


ACCESSORIES

Type	Model	Images	Description	Applicable Series/ models
Wireless Remote Controller	RCH-RTY5		Provides convenient control of temperature, fan speed, operating mode, airflow direction, timer settings, and sleep functions. Features a user-friendly interface with a clear LCD display.	Hi-ULTRA /Hi-EDGE/SmartSense Console/Ceiling Cassette /Slim Duct
	RCH-RTY4		Wireless Remote Controller with Intelligent Eye Includes all RTY5 functions plus Intelligent Eye occupancy sensing for enhanced comfort and energy savings through direct and indirect airflow control.	Only Hi-PRO
	RCH-RTY4-2		Enhanced Wireless Remote Controller • Factory default F° temperature display • Precision louver positioning for improved comfort and draft reduction • Compatible with products manufactured after June 2026	Hi-PRO/Hi-ULTRA / Hi-EDGE/ SmartSense Console\Ceiling Cassette \Slim Duct
Wired Remote Controller	HS-WC01U No Central Control Support		Does not support Central Control, Group Control, or BACnet communication.	Supported on all Hisense products except AHU for Hi-PRO, Hi-ULTRA, Hi-EDGE, and SmartSense series.
	HS-WC02U No Wireless Remote; Supports Central Control		HS-WC02U does not support wireless remote reception. Supports BACnet communication, Central Control, and Group Control.	
	HS-WC03		24V thermostat Control your comfort anytime, anywhere with built-in Wi-Fi and smartphone connectivity. Optimize efficiency and comfort with intelligent multi-stage heating/cooling control and programmable scheduling. Enjoy a premium user experience with a color touchscreen, humidity monitoring, and advanced system protection.	All Air Handlers, Hi-PAK units, and third-party equipment.
Wired Controller Extension Cable	2371165		HS-WC01U and HS-WC02U wired controllers come standard with an 8 m (26 ft) connection cable (Part No. 1549323). An optional extension cable is available, allowing the maximum cable length to be extended up to 30 m (98 ft).	HS-WC01U HS-WC02U
Central Controller	HS-WC01T		BACnet Central Controller Provides centralized control of up to 16 indoor units through the HS-CB544 BACnet communication module. For larger systems, third-party Building Management Systems (BMS) are recommended.	Supported on all Hisense products except AHU for Hi-PRO, Hi-ULTRA, Hi-EDGE, and SmartSense series.
Control Box	HS-CB544		BACnet / Modbus Gateway Module Communication interface module for Building Management System (BMS) integration. Features: BACnet protocol support Modbus protocol support One module required per indoor unit	Supported on all Hisense products except AHU for Hi-PRO, Hi-ULTRA, Hi-EDGE, and SmartSense series.
Auxiliary Electric Heat Control	HS-Interlock		HS-INTERLOCK CABLE Enables interlock operation between compatible wall-mounted units and a secondary heating source (such as auxiliary heater). Cable length: 24.6 ft (7.5 m).	Available on selected models only. Refer to individual model features for details.
Service tool	HI-CHECKER 3.0		HI-CHECKER 3.0 is a Bluetooth diagnostic tool designed for installation, commissioning, troubleshooting, and maintenance of Hisense inverter systems. Technicians can access real-time operating data, fault history, and system parameters directly from a smartphone	Applicable to all Hisense outdoor units

Specifications are subject to change without notice

Version: 20260601

Hisense

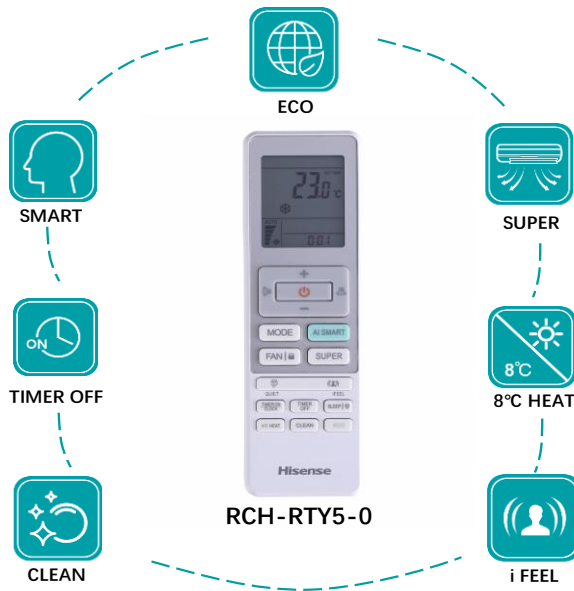

Button Description



Press this button to select the operation mode



Used to adjust the set temperature and the timer, also real time



Used to adjust vertical adjustment louver swinging and set the desired up/down airflow direction



Used to adjust the swing of the horizontal louver and set the left/right airflow direction



Used to start or stop the fast cooling/heating (Fast cooling operates at high fan speed with 60°F (16°C) set temp automatically. Fast heating operates at auto fan speed with 80°F (30°C) set temp automatically)



Used to select fan speed in sequence: auto, higher, high, medium, low, lower. Press this button for 5 seconds to activate LOCK mode; press it again for 5 seconds to deactivate the mode.



Used to set or cancel I FEEL Mode. In I FEEL mode the Air Conditioner operates basis temperature sensor fitted in remote instead of machine. Advice to use I FEEL mode end the remote put where the indoor unit receives signal easily



Used to set the Clean operation



Used to start Smart Running Mode. Smart Mode automatically selects the appropriate operating mode—Cooling, Dry, Fan Only, or Heating

Hisense

RCH-RTY4-2



1 VERTICAL SWING

Controls vertical louver swing and allows customization of up-and-down airflow direction.



2 FAN / LOCK

Cycles through fan speed settings (Auto, High, Medium, Low). Press and hold for 5 seconds to activate or deactivate the child lock function.



3 FRESH / QUIET

This button enables activation and deactivation of Fresh Mode and Quiet Mode: a single press turns on Fresh Mode to bring fresh air indoors, while a 5-second long press lowers compressor and fan speeds for quiet operation.



4 TIMER ON / CLOCK

Allows setting or canceling timer functions, as well as configuring the current time.



5 AIRFLOW FOLLOW / AVOID YOU

Activate or deactivate the air follow your or avoid you function, wind follow you mode brings cooler wind, avoid you mode eliminates the discomfort caused by air blowing directly at you.

*This feature is only applicable to Ductless system



6 HORIZONTAL SWING

Controls horizontal louver swing and allows you to set the desired left and right airflow direction.

*This feature is only applicable to Ductless system



7 AUTO

Enables AI Auto Mode to automatically adjust operating mode, temperature, wind speed, wind direction and humidity based on indoor ambient conditions, delivering optimal comfort.



8 SUPER

Press the Super button to run the air conditioner at maximum power and airflow regardless of ambient temperature for rapid cooling or heating.


VERTICAL SWING 1

FAN / LOCK 2

FRESH / QUIET 3

TIMER ON / 4
CLOCK

AIRFLOW FOLLOW / 5
AVOID YOU

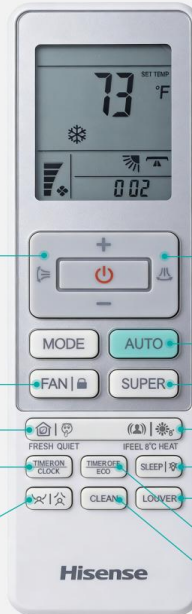

HOTIZONTAL SWING

7 AUTO

8 SUPER

9 I FEEL / 8°C(46°F) HEAT

10 SLEEP / DIMMER

12 LOUVER

11 TIMER OFF / ECO

13 CLEAN

*The brand-new RCH-RTY4-2 wireless controller will replace the original RCH-RTY5 and RCH-RTY4-0 wireless controllers.



9 I FEEL / 8°C(46°F) HEAT

This button controls iFEEL Mode and 8°C(46°F) Heating Mode. When iFEEL Mode is activated, the unit takes readings from the remote controller's sensor rather than the indoor unit. Please ensure the remote controller is placed within good signal reception range.



10 SLEEP / DIMMER

Enables setting and canceling Sleep Mode. Press and hold the button for 5 seconds to activate Dimmer mode, and press again for 5 seconds to deactivate it.



11 TIMER OFF / ECO

Allows setting or canceling timer functions, and enables activation or deactivation of Economy Mode.



12 LOUVER

Precision airflow adjustment with independent louver settings or fine-tune each louver individually. Customize angles or enable auto swing for targeted or wide-range airflow.

*This feature is only applicable to Cassette



13 CLEAN

Press this button to enable self-cleaning mode. Adopting Hisense patented indoor self-cleaning technology, it efficiently removes dust, bacteria, microorganisms, oil stains and more for deep cleaning and healthier air supply.

Note: RCH-RTY4-2 remote controller availability is planned for Q3 2026.

Specifications are subject to change without notice

Version: 20260601

Hisense

OPTIONAL WIRING CONTROLLER



Large **LCD Display** for EZ read and control



24h Real Timer and **Weekly Timer** setting



Eliminate the feeling of being cold
Reduce power consumption

HS-WC01U
HS-WC02U



❖ **Signal receiver** of Remote Control – **only HS-WC01U**

❖ **Central Controller** for Max. 16 units - **only HS-WC01T**

Button Description

- 1. ON/OFF BUTTON**
The appliance will be started or stopped when this button is pressed.
- 2. RUN INDICATOR**
Indicates that the appliance is on.
- 3. MODE BUTTON**
Press this button to select the operation mode.
- 4. FAN BUTTON**
Used to select fan speed in sequence high-auto-low-medium-high.
- 5. SWING BUTTON**
Used to stop or start adjustment louver swinging and set the desired airflow direction.
- 6. TIMER/CLOCK BUTTON**
Used to set the current time or set timer on/off.
- 7. SLEEP BUTTON**
Used to set or cancel Sleep Mode operation.
- 8. ENTER BUTTON**
Used to confirm settings.
- 9. CANCEL BUTTON**
Used to cancel settings.
- 10. ADD. FUNC. BUTTON**
Used to set filter clean, hot water, fresh air, electric heater, etc.
- 11. INCREASE SETTING BUTTON**
Used to raise the set temperature.
It raises the values when setting.
- 12. DECREASE SETTING BUTTON**
Used to lower the set temperature.
It lowers the values when setting.
- 13. LIQUID CRYSTAL DISPLAY(LCD) SCREEN**
Used to display indicator screens.
- 14. BUILT-IN INFRARED SIGNAL RECEIVER**
Used to receive infrared signal.



Scan the QR code to explore more
Address: 5995 Windward Pkwy Alpharetta, GA30024
www.hisensecomfort.com
Please refer to the Hi-Tech App for the most up-to-date information

Specifications are subject to change without notice

Version: 20260601