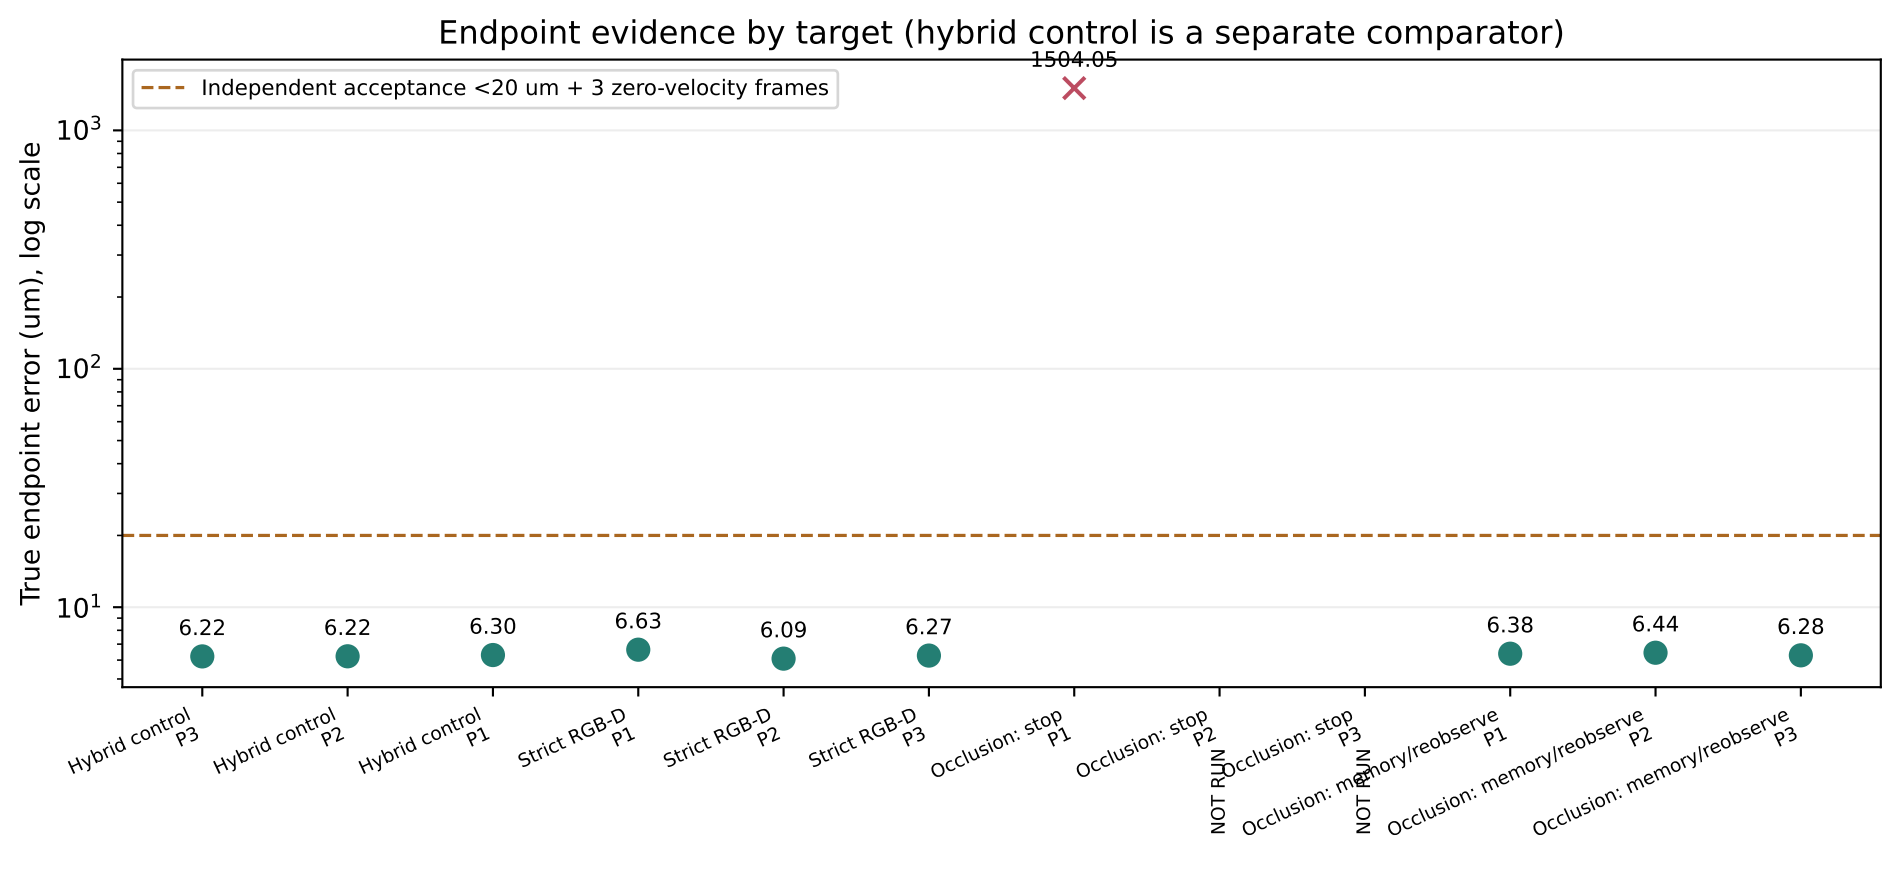
Endpoint evidence by target (hybrid control is a separate comparator)
Independent acceptance <20 um + 3 zero-velocity frames
True endpoint error (um), log scale
10^3
10^2
10^1
1504.05
6.22
6.22
6.30
6.63
6.09
6.27
6.38
6.44
6.28
Hybrid control P3
Hybrid control P2
Hybrid control P1
Strict RGB-D P1
Strict RGB-D P2
Strict RGB-D P3
Occlusion: stop P1
Occlusion: stop P2
Occlusion: stop P3
Occlusion: memory/reobserve P1
Occlusion: memory/reobserve P2
Occlusion: memory/reobserve P3
NOT RUN
NOT RUN