

Reducción del tiempo en rutas de la ciudad por medio de estructuras de datos

Juan Sebastián Pérez Salazar
Universidad Eafit
Colombia
jsperezs@eafit.edu.co

Yhoan Alejandro Guzmán
García Universidad Eafit
Colombia
yaguzmang@eafit.edu.co

Mauricio Toro
Universidad Eafit
Colombia
mtorobe@eafit.edu.co

RESUMEN

En este paper se plantean trabajos relacionados a la problemática principal y su vez una posible solución, con la cual se pueda reducir el tráfico en la ciudad de Medellín y evitar las altas tasas de contaminación que afectan la calidad de vida. Primeramente, se realiza una introducción al problema, posteriormente se plantea el problema, luego se presentan algunos problemas relacionados y por último una posible solución. También se contempla la posibilidad de unas mejoras considerables a futuro en la estabilidad de la ciudad.

1. INTRODUCCIÓN

Actualmente uno de los mayores problemas de la ciudad de Medellín y muchas otras, es la congestión que se presentan en las rutas. Esto afectando a la movilidad de la ciudad y a su vez a la calidad de vida, teniendo en cuenta que una gran cantidad de automóviles en las rutas incrementa la cantidad de polución y en consecuencia la contaminación de la ciudad aumenta, llevándola en ocasiones a situaciones críticas y obligando a un pico y placa ambiental. Los ciudadanos que poseen vehículos personales podrían compartir su vehículo con personas de la misma empresa o que saben que se dirigen al mismo lugar. Por medio de esta solución se desea evitar estos extremos, reduciendo el número de vehículos en las rutas y mejorando la movilidad de la ciudad.


2. PROBLEMA

El problema consiste en diseñar un algoritmo que pueda mejorar la situación actual de la ciudad, por medio de una red de vehículos compartidos. Esto, teniendo en cuenta que actualmente cada ciudadano se dirige solo a su trabajo. La idea es que este ciudadano pueda montar a otras 4 personas a su vehículo y que el tiempo que este se demoraba en llegar a su trabajo no se vea aumentado en una gran proporción.

3. RELATED WORK

3.1 CrowdRoute: a crowd-sourced routing algorithm in public transit networks

Crowd-sourced (CS) systems recruit a crowd of human beings to solve a range of problems. There are various CS systems that already exist. Popular systems include Wikipedia, Linux, Mechanical-Turk based systems and many more systems are being built. We can classify CS systems by several dimensions such as the nature of collaboration, type of target problem, standalone or piggyback. For a complete list of dimensions, readers are referred to [1]. But the two most important dimensions are the nature of collaboration and type of target problem. The passengers could collaborate explicitly or implicitly towards solving a target problem, which can be any problem defined by the system owner. Some other important dimensions include: how to recruit passengers, what passengers do, how to combine them, and how to evaluate them. There have been works on using crowd-sourced information to improve the quality of the routing algorithm, one great example is [3] which is recently acquired by Google [4]. [2]

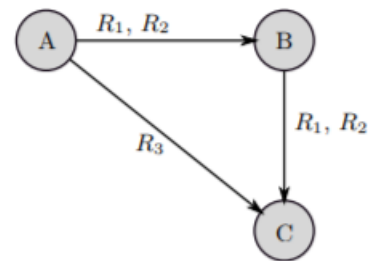

R_1 : $A \rightarrow B \rightarrow C$ from 8:00 till 10:00 every 0.5 hr

R_2 : $A \rightarrow B \rightarrow C$ from 8:10 till 9:10 every 1 hr

R_3 : $A \rightarrow C$ from 9:00 till 11:00 every 1 hr

Time to travel between stops is 20 minutes

Transfers time is 5 minutes for every stop

Figure 1: Path of a crowd route.

3.2 Traffic Measurement and Route Recommendation System for Mass Rapid Transit (MRT)

Singapore's public transport system is among the world's most efficient ones in terms of the density of the network, crowdedness and travel times [5, 6]. Its core component is the Mass Rapid Transit (MRT), a railway system spanning the entire city-state, which has been in operation since 1987. Efficiency metrics such as the crowdedness of stations and travel times between stations are instrumental to decision making for operators in ensuring quality of service.

Currently, available technical solutions to estimate the crowdedness of stations include: • Estimations from video footage of camera surveillance systems [7]. However, the performance of these systems depends on various external factors such as the lighting conditions inside stations. Video footage cannot be used to measure travel times between stations. • Estimations from WiFi captures [8] since Singapore's subway stations are currently equipped with free WiFi [9]. However, this measure does not differentiate between passengers on platforms and passengers on trains. Similarly, travel times cannot be estimated by WiFi captures. • Smart card system records from when passengers enter or exit the platforms of subway stations, which can be used to determine the number of boarding and disembarking at a particular station. Such records include the time of departure and arrival of each passenger. However, these data do not capture activity such as travel routes and transfer activity between lines— factors of importance when considering the crowdedness of platforms, especially in Singapore, where the density of stations and lines is high and route alternatives available to each passenger are numerous.

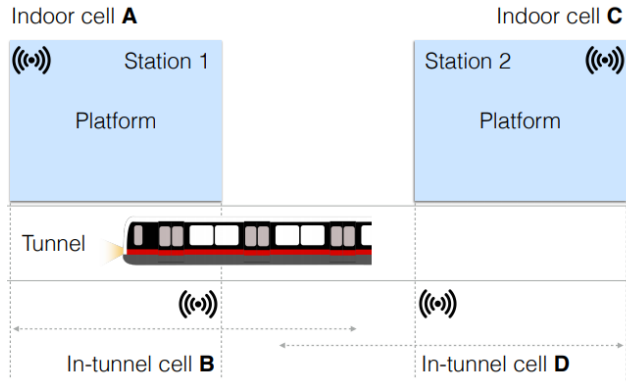


Figure 2: Dedicated indoor cell towers serve the platforms (A and C) and tunnels (B and D) of indoor MRT stations exclusively.

3.3 Enabling Smart Transit with Real-time Trip Planning

With the rise of urbanization, modern cities are facing big problems such as providing efficient and effective public transportation services. Innovative ideas in technology and citizen engagement are therefore essential to create smarter cities and improve lives. Intelligent transportation systems enable city-dwellers to quickly find optimal and relevant routes in a transit network between specified origin and destination when planning daily trips. Nevertheless, traffic congestion has always been a long-winded issue in big cities, especially during peak hours, and hence in a realistic transit network bus arrival times are not as accurate as scheduled since they are largely dependent on real traffic conditions. As a result, state-of-the-practice trip planners, which mainly rely on static schedules of public transport, may cause user dissatisfaction as the expected travel times

of their recommended routes are often inaccurate in real world. Therefore, in order to provide smart traffic services in modern cities it is important to develop a practical transit trip planner that leverages both historical and real-time data to recommend routes that are adapted to traffic situations. Time-dependent characteristic of urban transit. We perform an analysis on the historical data to understand the time-dependent characteristic of bus travel time. The data are collected from real smart card integrated bus network in Singapore and comprise of the recorded usage of all bus lines in a period of three months.

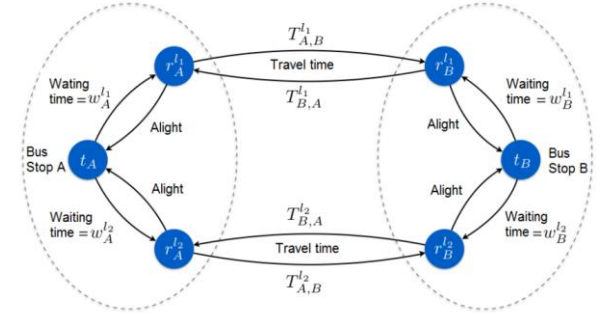


Figure 3: Time-dependent transportation graph.

3.4 Instant Graph Routing: Lightweight Graph Generation Scheme

Recently, the application services are extended. A typical WSNs consist of a large number of low powered, low cost, and low memory and computation performance, intelligent sensor devices. These sensors are involved in monitoring and measuring some industrial, military and other ubiquitous fields. It is one of important factor for evaluate network efficiency that decide the route for transfer packets. There are many researches about deciding a route in various and limited sensor network like AODV [10]. The graph routing is a one of source routing mechanism that adapted ISA100.11a [11] standard for wireless industrial monitoring and controlling system. The graph ID involved some sensor node ID on the one route. It makes possible that reduce the inefficient extend of routing header size. In addition, instead of routing the sensor node just forwarding the pickets using graph tables. These graphs are built and managed by the system manager, central network management unit in ISA100.11a network. However, it is difficult to change graph route and react with network re-consist flexibly. The rest of this paper is organized as follows. Section 2 outlines related work in this area. Section 3 describes our network model and assumptions and explains instant graph routing mechanism. Section 4 focuses on the comparison of the proposed topology with existing graph generation overhead in typical WSN communications.

Solution:

Graph Routing: The ISA100.11a standard is one of the sensor network application based on IEEE802.15.4

standard. In this standard, layer 2 routing called graph routing is used for the sensor network efficiency. The graph routing is based on source routing which doesn't have routing tables. Source routing has several advantages like every node does not keep the routing tables. Every address of next node in the paths are stored in the network header. However, the size of header increases when the paths get longer. So, in ISA100.11a routing mechanisms have mingled source routing with graph routing. The source routing is basic routing method of this standard and some paths are represented just by one graph ID. The graph routing plays the role that it binds every node on one route (graph) with one ID and reduces the size of a header in order to overcome this disadvantage. In every node, there exists the graph table which has next hop information of each graph ID for transmission. Node determines the next hop by comparing with graph table and packet header. The graph information and graph table are described and distributed by the system manager to each node according to each graph.

octets	bits
	7 6 5 4 3 2 1 0
1 octet	Compress=0 Priority (Unsigned4) DiForwardLimit (Unsigned3)
0-1 octet	DiForwardLimitExt (Unsigned8)
1 octet	N (number of entries in routing table; Unsigned8)
2*N octets	Series of N GraphIDs/addresses (Unsigned16, LSB)

Figure 4. Structure of Uncompressed DROUT Subnet header

A routing is supported from the DROUT sub-header of the data link subnet layer existing between the data link layer and network layer. Nodes communicate with system manager through the predefined alternative route. The system manager advertises to the node the route of source to destination and the node comprises the DROUT Sub-header using the received routing information A policy and the method of drawing this graph were not determined by the standard and the self-regulated graph generation which is recommended by each industry system

octets	bits
	7 6 5 4 3 2 1 0
1 octet	Compress=1 Priority (Unsigned4) DiForwardLimit (Unsigned3)
0-1 octet	DiForwardLimitExt (Unsigned8)
1 octet	GraphID (Unsigned8)

Figure 5. Structure of Compressed DROUT Subnet header

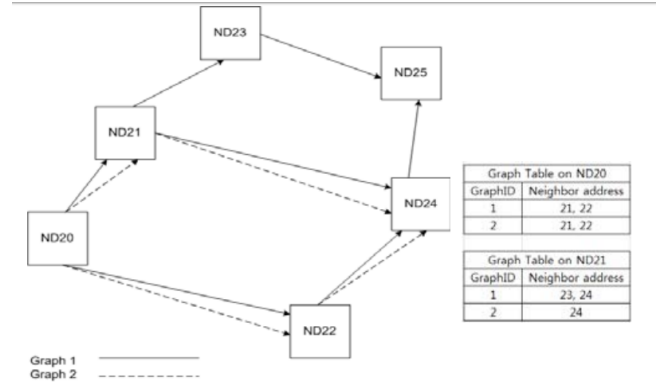


Figure 6. Example of graph routing and graph tables

Network Topology: Proposed network topology is two-tiered hybrid type of traditional mesh and star topology sensor network. In the first level, there deployed reduced functional sensor nodes (end nodes) having star topology. In the second level, there deployed fully functional sensor nodes for routing packet to the root using mesh topology. In this sensor network fields are consist with cells like hexagon network model. In the one cell, there are only one cluster headers (level 2) and many end nodes (level 1). In the level 1, they do not need any routing mechanisms. However, in the level 2, they use ISA100.11a graph routing mechanism.

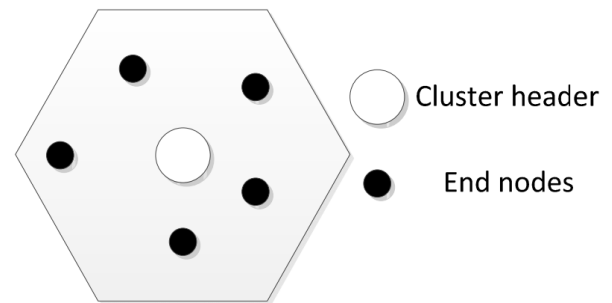


Figure 7: Cell, cluster header, end node

Cluster header nodes: The Cluster header nodes have high performance for routing and deploying 16bit short address to end nodes. These routing nodes communicate cell to cell with other adjacent cluster header node. The system manager deploy the cluster headers consider regional information in each cells.

Figure 6 show 16 bit short addresses of each region based the cluster header in the cell.

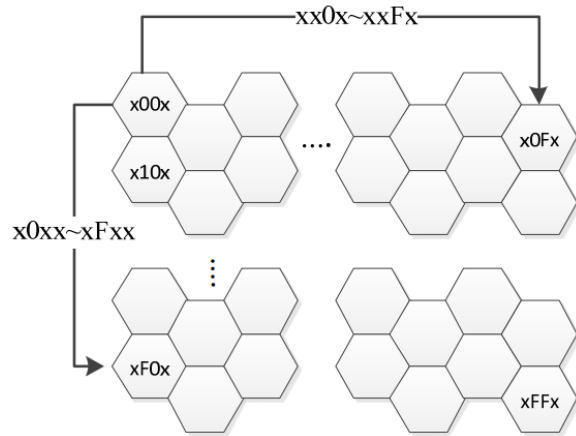


Figure 8: Regional information based cluster header ID

Route Stored Graph ID: In the proposed scheme, the graph ID is 16bit length like ISA100.11a standard. 000bit prefix – first 3bit of 16bit graph ID decide next route from network root node. 000~101 are indicating 6 adjacent cells with clock cycle. 110 and 111 means that ID is not graph ID (It is short address of one node). 00bit body – following 2bit set of 16bit graph ID decide next route from ongoing direction. 00~10 are indicate 3 on going direction cells with clock cycle. There are any route that rapidly changed path in the planar network. 11 mean that graph is finish. 0bit tail – the last 1bit indicate that graph is upstream or downstream. 0 mean downstream graph (from root to end node) and 1 means upstream graph (from end node to root) By above rules, the graph ID includes routing path information. First 3bit indicates direction from root and following 2bit shows changing of directions maximum 7hops. Last 1 bit decide the up/down stream information.

Route Stored Graph ID In the proposed scheme, the graph ID is 16bit length like ISA100.11a standard. 000bit prefix – first 3bit of 16bit graph ID decide next route from network root node. 000~101 are indicating 6 adjacent cells with clock cycle. 110 and 111 means that ID is not graph ID (It is short address of one node). 00bit body – following 2bit set of 16bit graph ID decide next route from ongoing direction. 00~10 are indicate 3 on going direction cells with clock cycle. There are any route that rapidly changed path in the planar network. 11 mean that graph is finish. 0bit tail – the last 1bit indicate that graph is upstream or downstream. 0 mean downstream graph (from root to end node) and 1 means upstream graph (from end node to root) By above rules, the graph ID includes routing path information. First 3bit indicates direction from root and following 2bit shows changing of directions maximum 7hops. Last 1 bit decide the up/down stream information. Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. To copy

otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Conference'10, Month 1–2, 2010, City, State, Country. Copyright 2010 ACM 1-58113-000-0/00/0010...\$10.00.

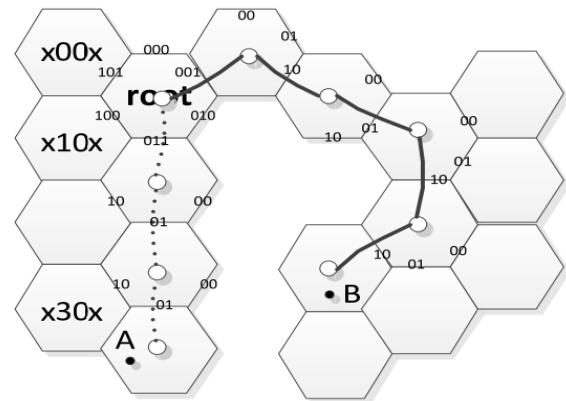


Figure 9: example of route stored graph routing

REFERENCES

- [1] A. Doan, R. Ramakrishnan, and A. Y. Halevy. Crowdsourcing Systems on the World-Wide Web. Communications of the ACM, 54(4):86–96, 2011.
- [2] Francis, E., Mendez, L., Sofrony, J. Collision-free path planning in free path planning in multi-dimensional environments, Ingenieria e investigación, VOL 31, 2011, pages 5-14.
- [3] To Tu Cuong. CrowdRoute: a crowd-sourced routing algorithm in public transit networks. Freie Universität Berlin, Berlin, Germany, 2013. Pages 1-2.
- [4] Waze. www.waze.com, July 2013.
- [5] Yahoo! News. <http://news.yahoo.com/googlediscloses-paid-966-million-waze-220918812.html>, July 2013.
- [6] V. Shah and M. Manibo. Cities with ecient public transport highly attractive and competitive: study. <http://www.eco-business.com/news/citiesefficient-public-transport-highly-attractiveand-competitive-study/>, retrieved on 2015-02-02.
- [7] R. Sim. Study: Singapore's public transport system one of world's most ecient. <http://www.straitstimes.com/news/singapore/transport/story/study-singapores-publictransport-system-one-wo>
- [8] B. Ozer and M. Wolf. A train station surveillance system: Challenges and solutions. Proceedings of the 2014 IEEE Conference on Computer Vision and Pattern Recognition, pages 652–657, 2014.
- [9] L. Schauer, M. Werner, and P. Marcus. Estimating crowd densities and pedestrian flows using Wi-Fi and Bluetooth. In Proceedings of the 11th International

Conference on Mobile and Ubiquitous Systems:
Computing, Networking and Services
(MOBIQUITOUS 2014), pages 171–177, Brussels,
Belgium, 2014. ACM.

[9] Roll-out of free WiFi at 32 MRT stations to be
completed by end-2015. [http:
//www.todayonline.com/singapore/roll-out-freewifi-32-
mrt-stations-be-completed-end-2015](http://www.todayonline.com/singapore/roll-out-freewifi-32-mrt-stations-be-completed-end-2015), retrieved on
2015-02-05

[10] ISA-100.11a-2009 Wireless systems for industrial
automation: Process control and related applications,
—<http://www.isa.org/ISA100-11a>

[11] Wireless Devices Specification, HCF SPEC 290
Revision 1.0. HART communication foundation.
September, 2007.