DATA LEVEL PARALLELISM

Mahdi Nazm Bojnordi

Assistant Professor

School of Computing

University of Utah

Overview

- ILP: instruction level parallelism
  - Out of order execution (all in hardware)
  - IPC hardly achieves more than 2
- Other forms of parallelism
  - DLP: data level parallelism
    - Vector processors, SIMD, and GPUs
  - TLP: thread level parallelism
    - Multiprocessors, and hardware multithreading
  - RLP: request level parallelism
    - Datacenters

Data Level Parallelism (DLP)

Data Level Parallelism

- Due to executing the same code on a large number of objects
  - Common in scientific computing
- DLP architectures
  - Vector processors—e.g., Cray machines
  - SIMD extensions—e.g., Intel MMX
  - Graphics processing unit—e.g., NVIDIA
- Improve throughput rather than latency
  - Not good for non-parallel workloads

Vector Processing

- Scalar vs. vector processor

```
for(i=0; i<1000; ++i) {
    B[i] = A[i] + x;
}
```



Vector Processing

- Scalar vs. vector processor

```
for(i=0; i<1000; ++i) {
    B[i] = A[i] + x;
}
```

add r3, r2, r1

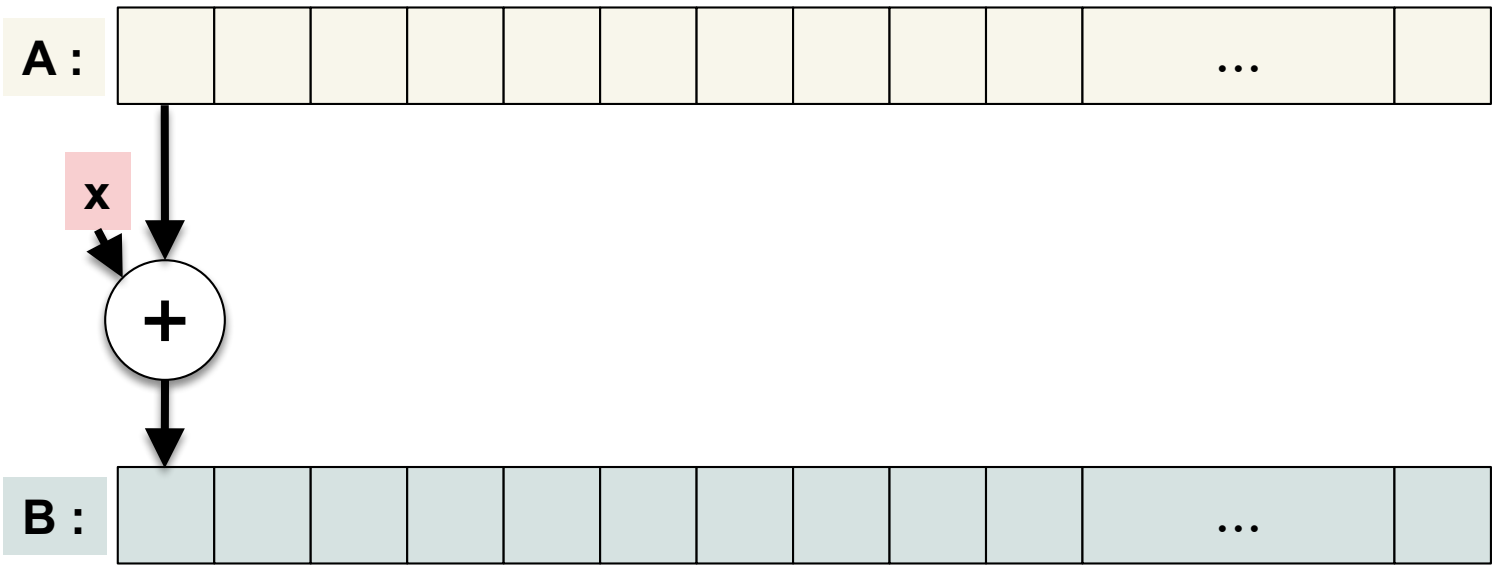

Vector Processing

- Scalar vs. vector processor

```
for(i=0; i<1000; ++i) {
    B[i] = A[i] + x;
}
```

vadd v3, v2, v1

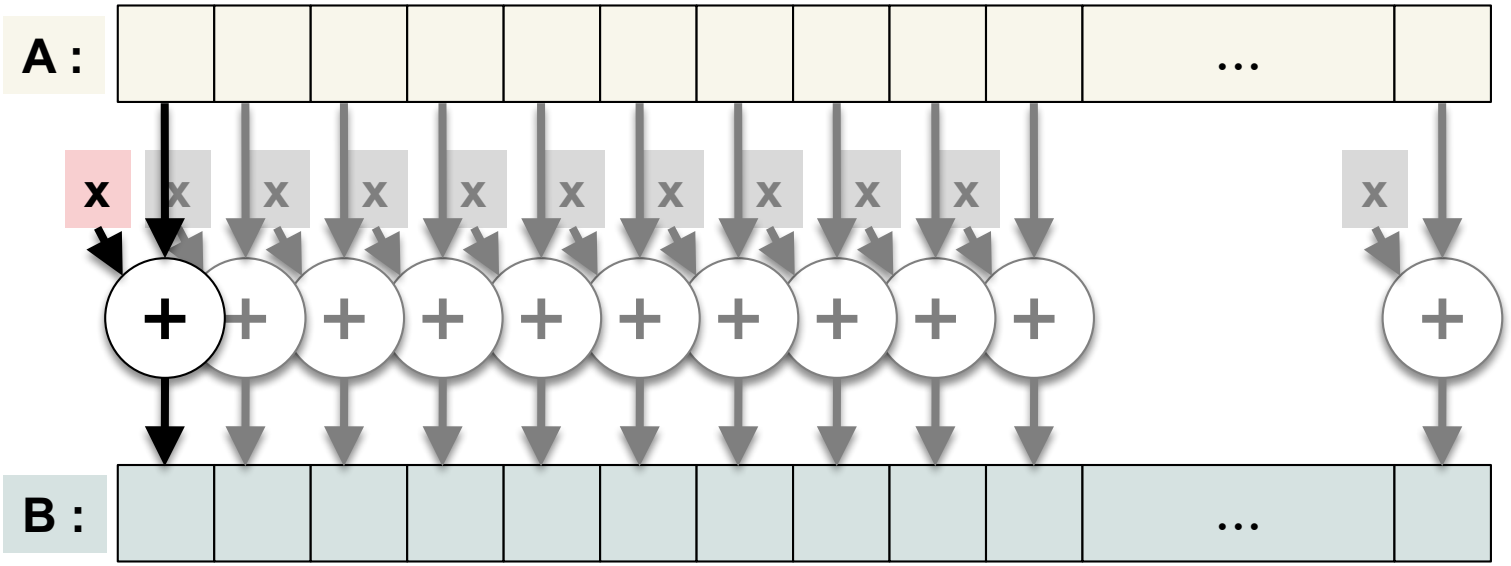

Vector Processor

- A scalar processor—e.g., MIPS
  - Scalar register file
  - Scalar functional units
- Vector register file
  - 2D register array
  - Each register is an array of registers
  - The number of elements per register determines the max vector length
- Vector functional units
  - Single opcode activates multiple units
  - Integer, floating point, load and stores

Basic Vector Processor Architecture

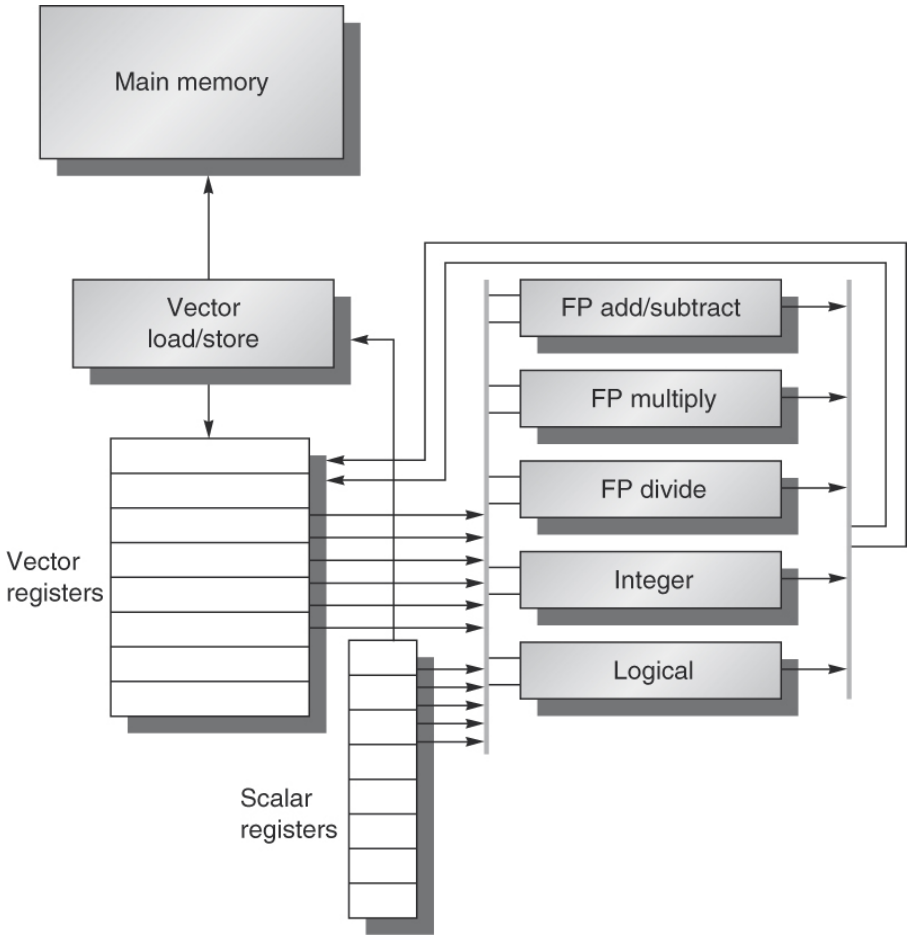

Parallel vs. Pipeline Units

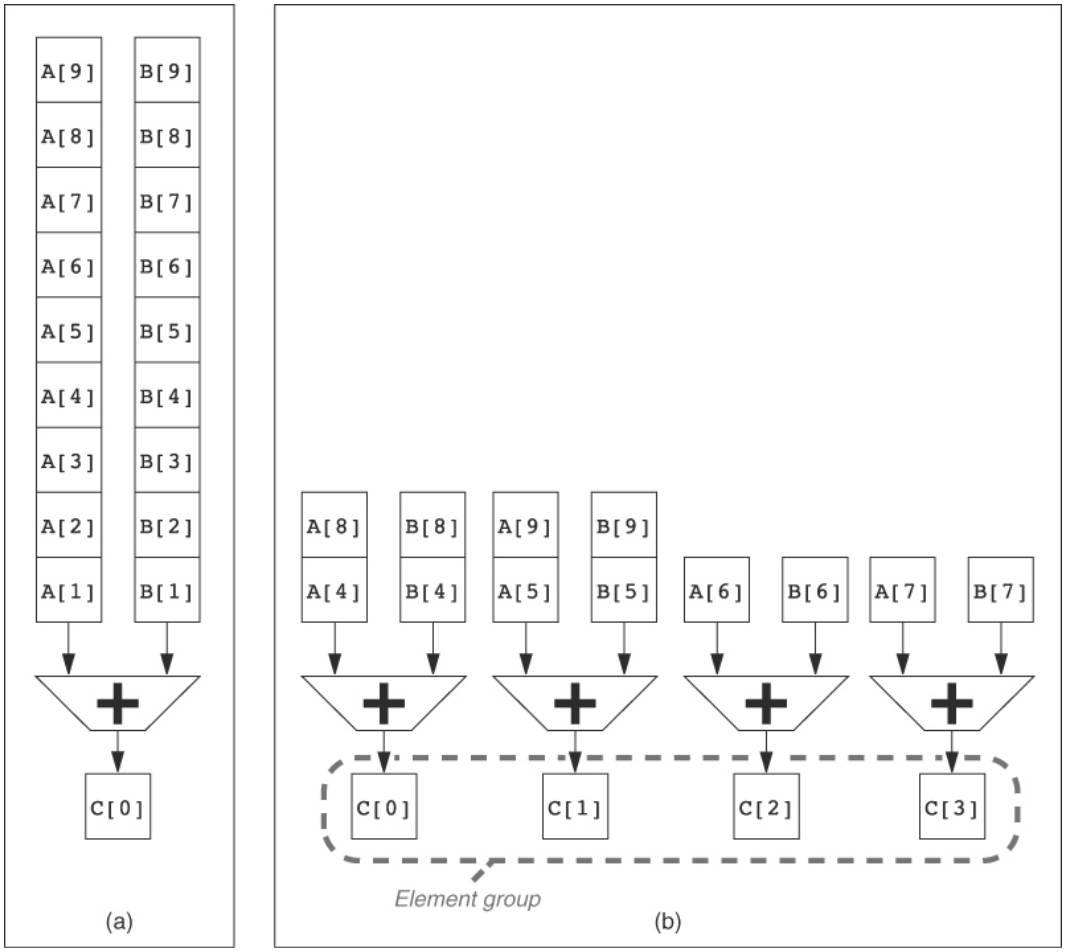

Vector Instruction Set Architecture

- Single instruction defines multiple operations
  - Lower instruction fetch/decode/issue cost
- Operations are executed in parallel
  - Naturally no dependency among data elements
  - Simple hardware
- Predictable memory access pattern
  - Improve performance via prefetching
  - Simple memory scheduling policy
  - Multi banking may be used for improving bandwidth

Vector Operation Length

- Fixed in hardware
  - Common in narrow SIMD
  - Not efficient for wide SIMD
- Variable length
  - Determined by a vector length register (VLR)
  - MVL is the maximum VL
  - How to process vectors wider than MVL?

Conditional Execution

- Question: how to handle branches?
- Solution: by predication
  - Use masks, flag vectors with single-bit elements
  - Determine the flag values based on vector compare
  - Use flag registers as control mask for the next vector operations

```
for(i=0; i<1000; ++i) {
    if(A[i] !=B[i])
        A[i]  -=  B[i];
}
```

```
vld V1, Ra
vld V2, Rb
vcmp.neq.vv M0, V1, V2
vsub.vv V3, V2, V1, M0
vst V3, Ra
```

Branches in Scalar Processors

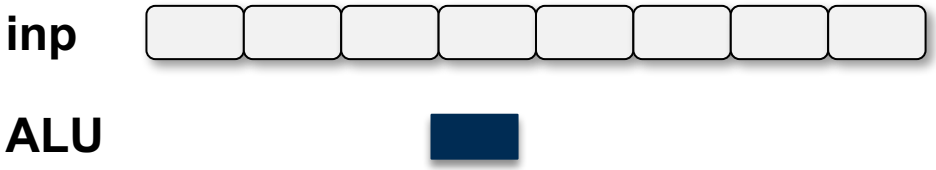


```
for (i =0; i < 8; ++i) {
    if (inp[i] > 0) {
        y = inp[i] * inp[i];
        y = y + 2 * inp[i];
        out[i] = y + 3;
    } else {
        y = 4 * inp[i];
        out[i] = y + 1;
    }
}
```

Branches in Scalar Processors

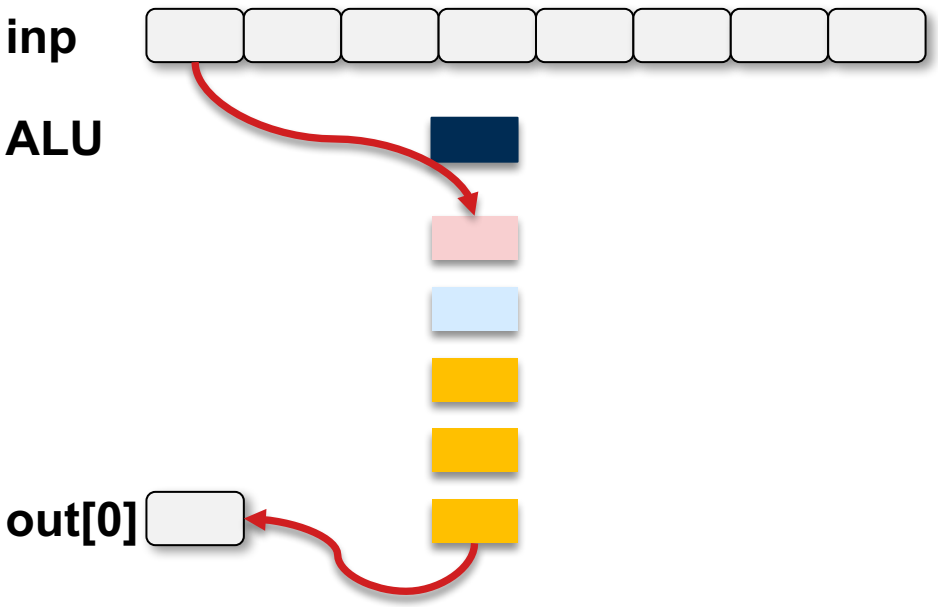


```
for (i =0; i < 8; ++i) {
    if (inp[i] > 0) {
        y = inp[i] * inp[i];
        y = y + 2 * inp[i];
        out[i] = y + 3;
    } else {
        y = 4 * inp[i];
        out[i] = y + 1;
    }
}
```

Branches in Scalar Processors

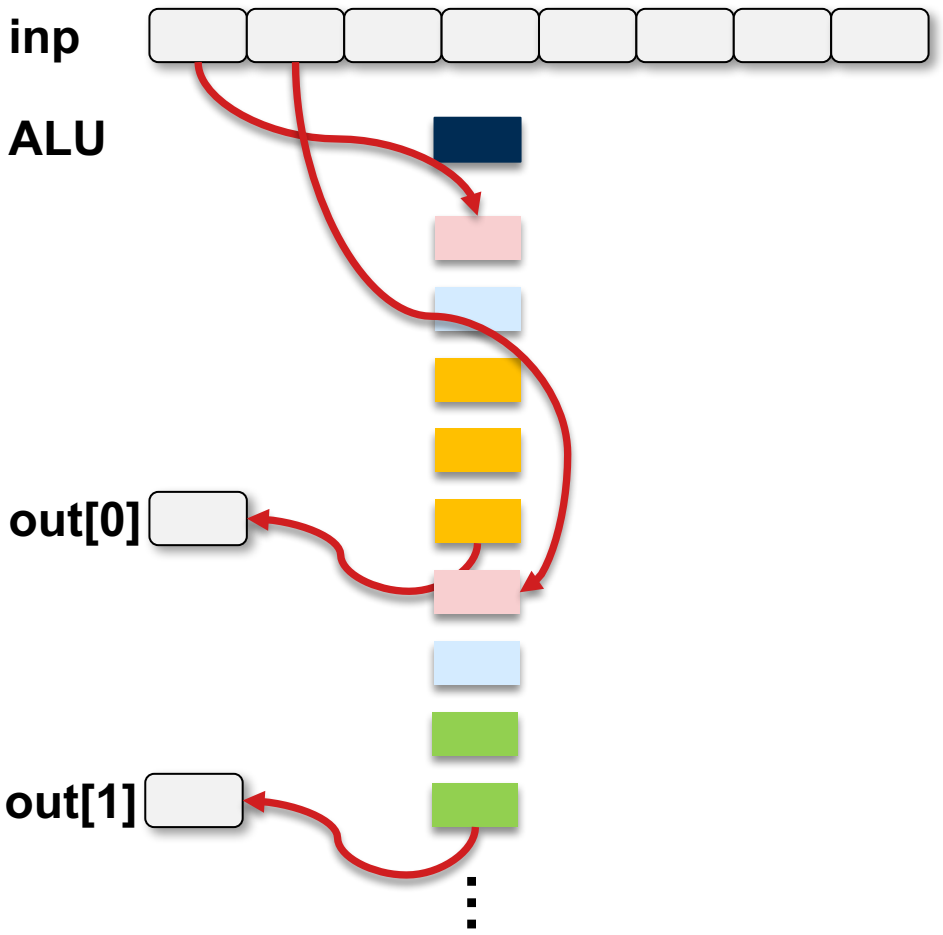


```
for (i =0; i < 8; ++i) {
    if (inp[i] > 0) {
        y = inp[i] * inp[i];
        y = y + 2 * inp[i];
        out[i] = y + 3;
    } else {
        y = 4 * inp[i];
        out[i] = y + 1;
    }
}
```

Branches in Vector Processors

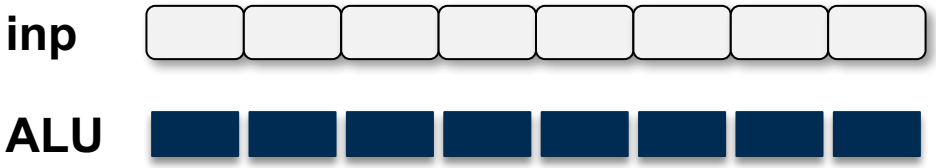


```
if (inp[i] > 0) {
        y = inp[i] * inp[i];
        y = y + 2 * inp[i];
        out[i] = y + 3;
} else {
        y = 4 * inp[i];
        out[i] = y + 1;
}
```

Branches in Vector Processors

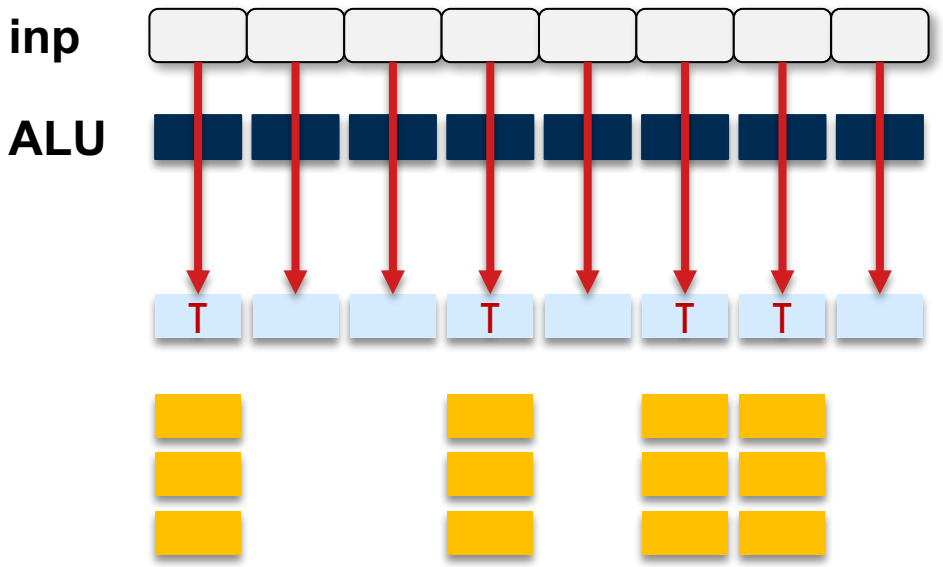


```
if (inp[i] > 0) {
        y = inp[i] * inp[i];
        y = y + 2 * inp[i];
        out[i] = y + 3;
} else {
        y = 4 * inp[i];
        out[i] = y + 1;
}
```

Branches in Vector Processors

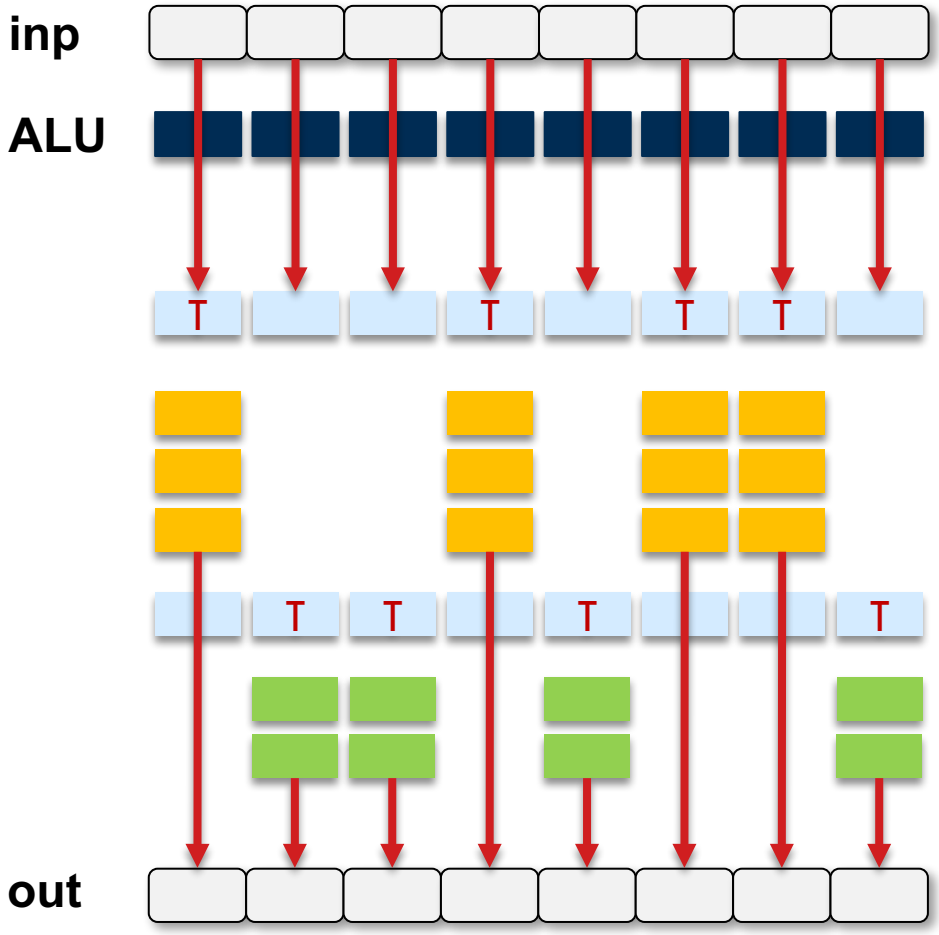


```
if (inp[i] > 0) {
        y = inp[i] * inp[i];
        y = y + 2 * inp[i];
        out[i] = y + 3;
} else {
        y = 4 * inp[i];
        out[i] = y + 1;
}
```