


Function key barcodes — F1 to F10

Scanning one of these makes the barcode scanner press that function key. MINJCODE MJ2818A (WoneNice WN3300 V3.1), HID keyboard wedge, no configuration required.

Rule: the barcode data is the single ASCII control byte 0x15 + n, encoded as Code 128. Every symbol below is verified machine-decodable.


Print at 100% scale — do NOT "fit to page".

F1

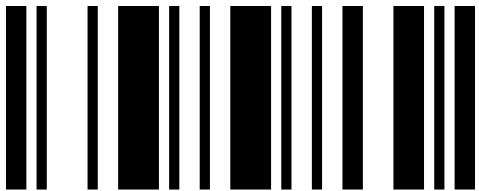


Code 128 · data 0x16

F2

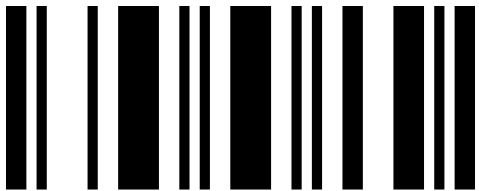


Code 128 · data 0x17

F3

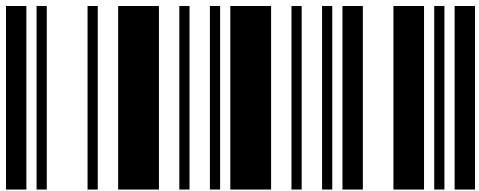


Code 128 · data 0x18

F4

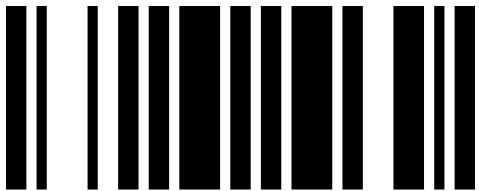


Code 128 · data 0x19

F5

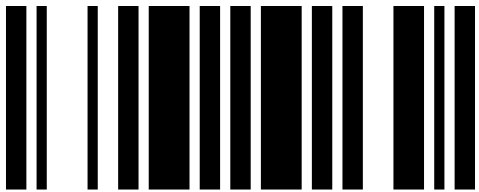

Code 128 · data 0x1A

F6

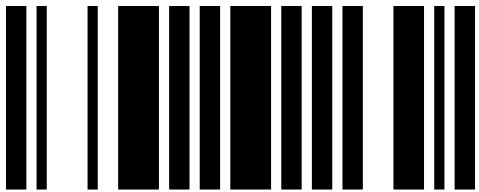

Code 128 · data 0x1B

F7




Code 128 · data 0x1C

F8



Code 128 · data 0x1D

F9

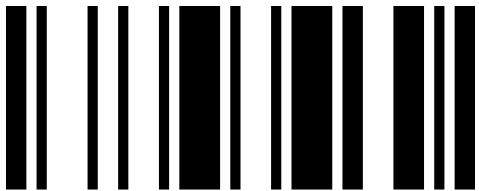

Code 128 · data 0x1E

F10



Code 128 · data 0x1F