
USB INPUT + PROTECTION


solder pads for USB-A pigtail to the Pi (VBUS, D-, D+, GND, shield->GND)

protects the Pi USB port from board or hood-wiring faults


reverse-polarity guard for a miswired pigtail (~0.3V drop)

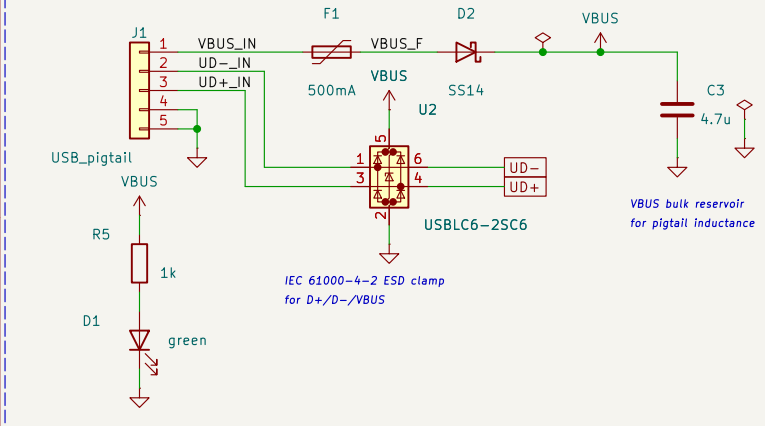


USB-SERIAL BRIDGE

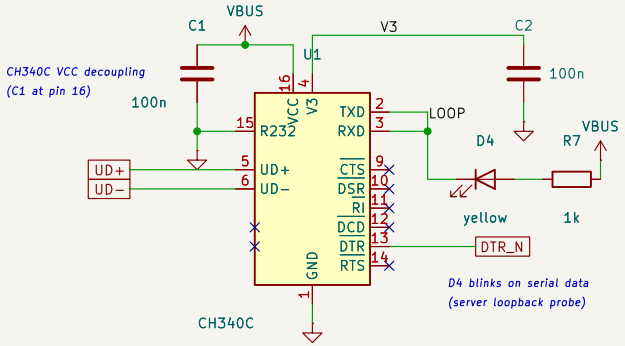

POWER-ON LOGIC

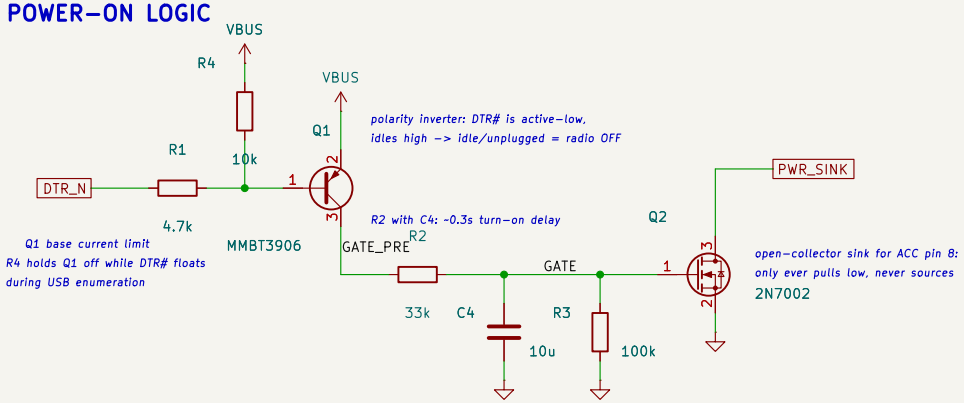

K3 ACC OUTPUT

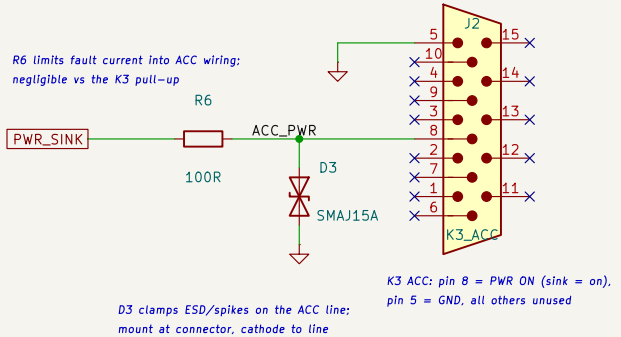

Fail-safe: unplugged/unpowered/port-closed = radio OFF
CH340C DTR -> PNP inverter -> RC -> 2N7002 open collector -> K3 ACC pin 8
W6JY

Sheet: /
File: k3pwr-dongle.kicad_sch

Title: k3pwr USB power dongle

Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.6		Id: 1/1