



(a) framing states and transitions, fixed by the protocol

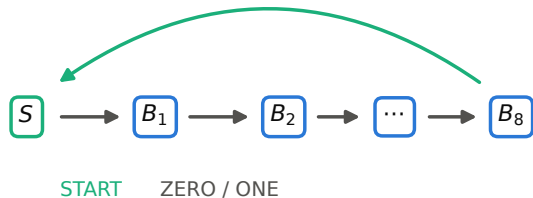

emit byte, only if the completed value
is admissible (0x20-0x7E or 0x0A)

each B_k is 2^{k-1} states carrying the partial byte;
256 states in total

(b) decoding as a trellis; bold is the surviving path

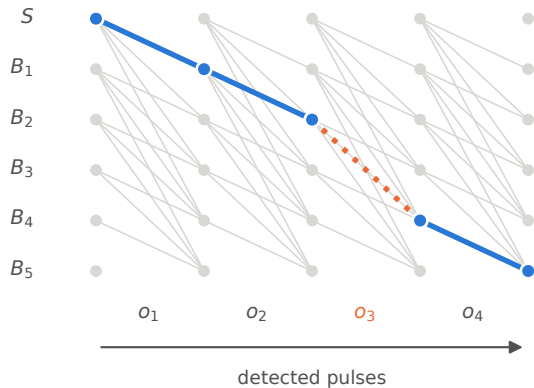

o_3 advances two positions on one pulse: a symbol was never detected

every edge scores $\log \mathcal{N}(d; \mu_s, \sigma_s^2) + \log \mathcal{N}(g; \hat{g}(k, u), ((1+k)\sigma_g)^2) + k \log \pi$