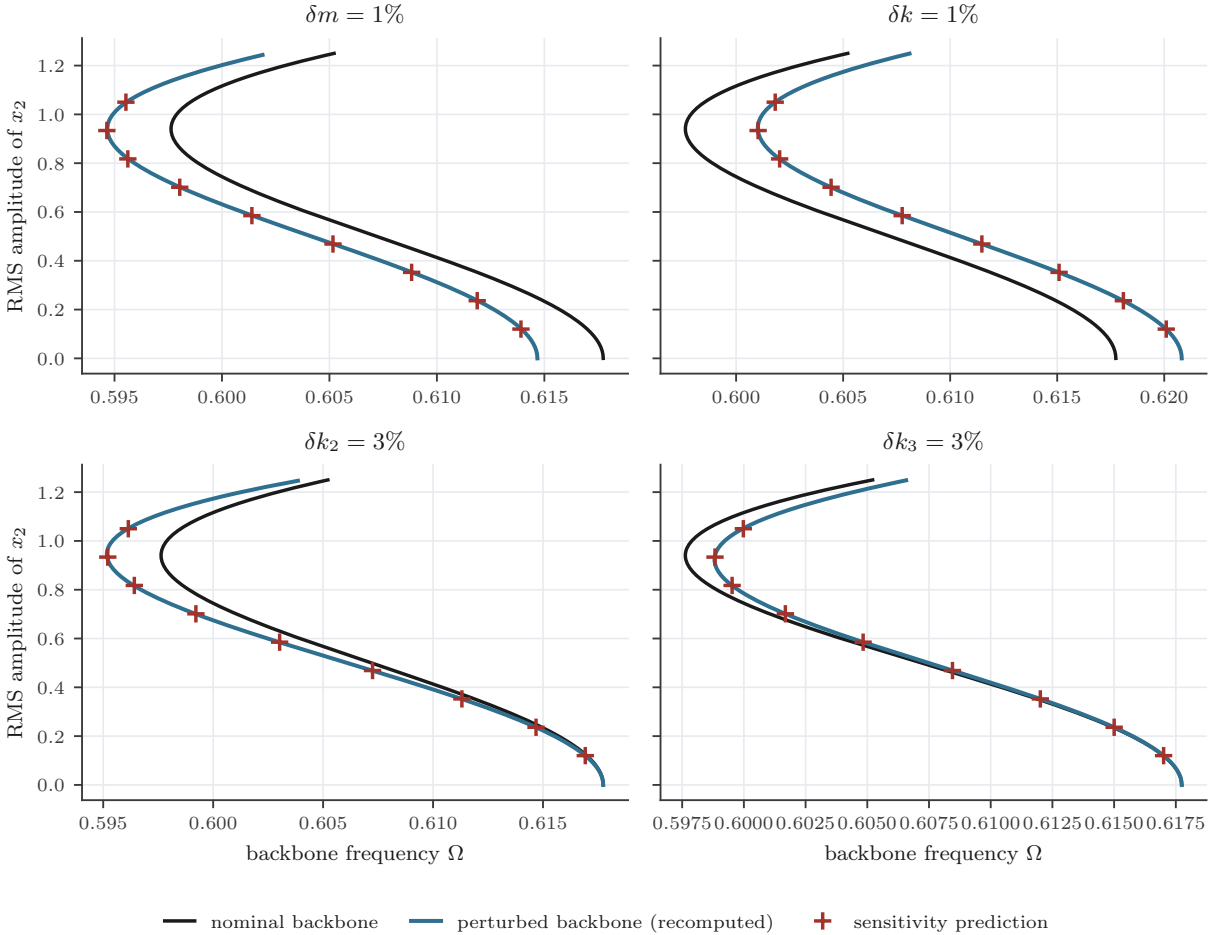

$\delta m = 1\%$
$\delta k = 1\%$
$\delta k_2 = 3\%$
$\delta k_3 = 3\%$
RMS amplitude of x_2
backbone frequency Ω
nominal backbone
perturbed backbone (recomputed)
sensitivity prediction