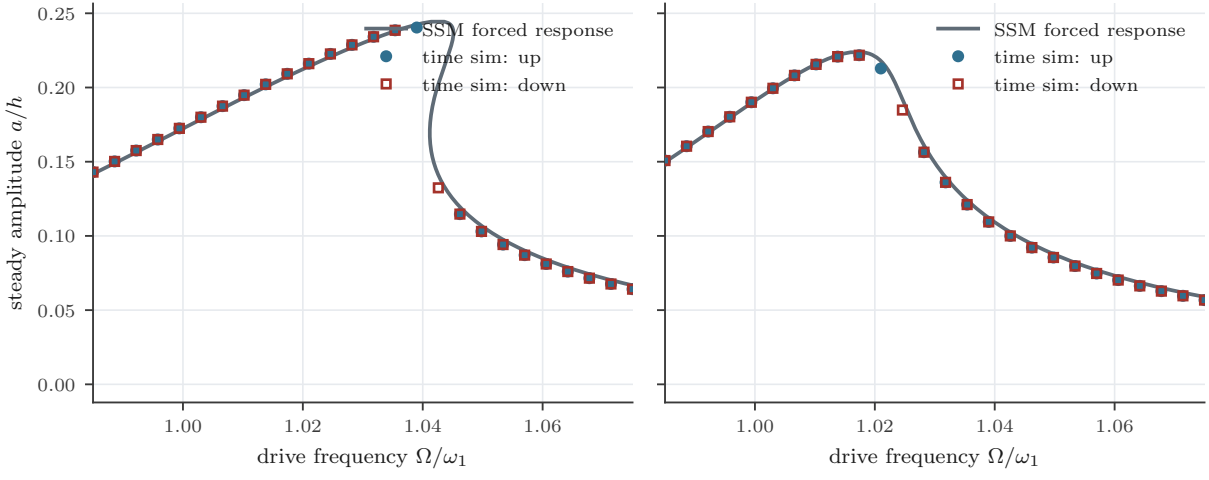

(a) unidirectional: jumps (hysteresis)
(b) steered tow: smooth (no jump)
steady amplitude $a/h$
0.25
0.20
0.15
0.10
0.05
0.00
1.00
1.02
1.04
1.06
drive frequency $\Omega/\omega_1$
SSM forced response
time sim: up
time sim: down