
(a) optimized curvature softens

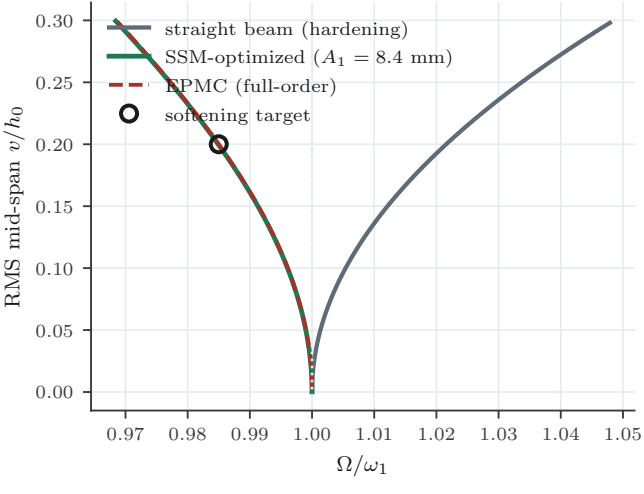

(b) same optimum, huge cost gap

	SSM	**EPMC**
optimal A_1 (mm)	8.359	8.257
detuning at $0.2h_0$	-1.51%	-1.50%
backbone evals	16	10
wall time	0.27 s	22 s
cost / backbone	1×	$\sim 134\times$