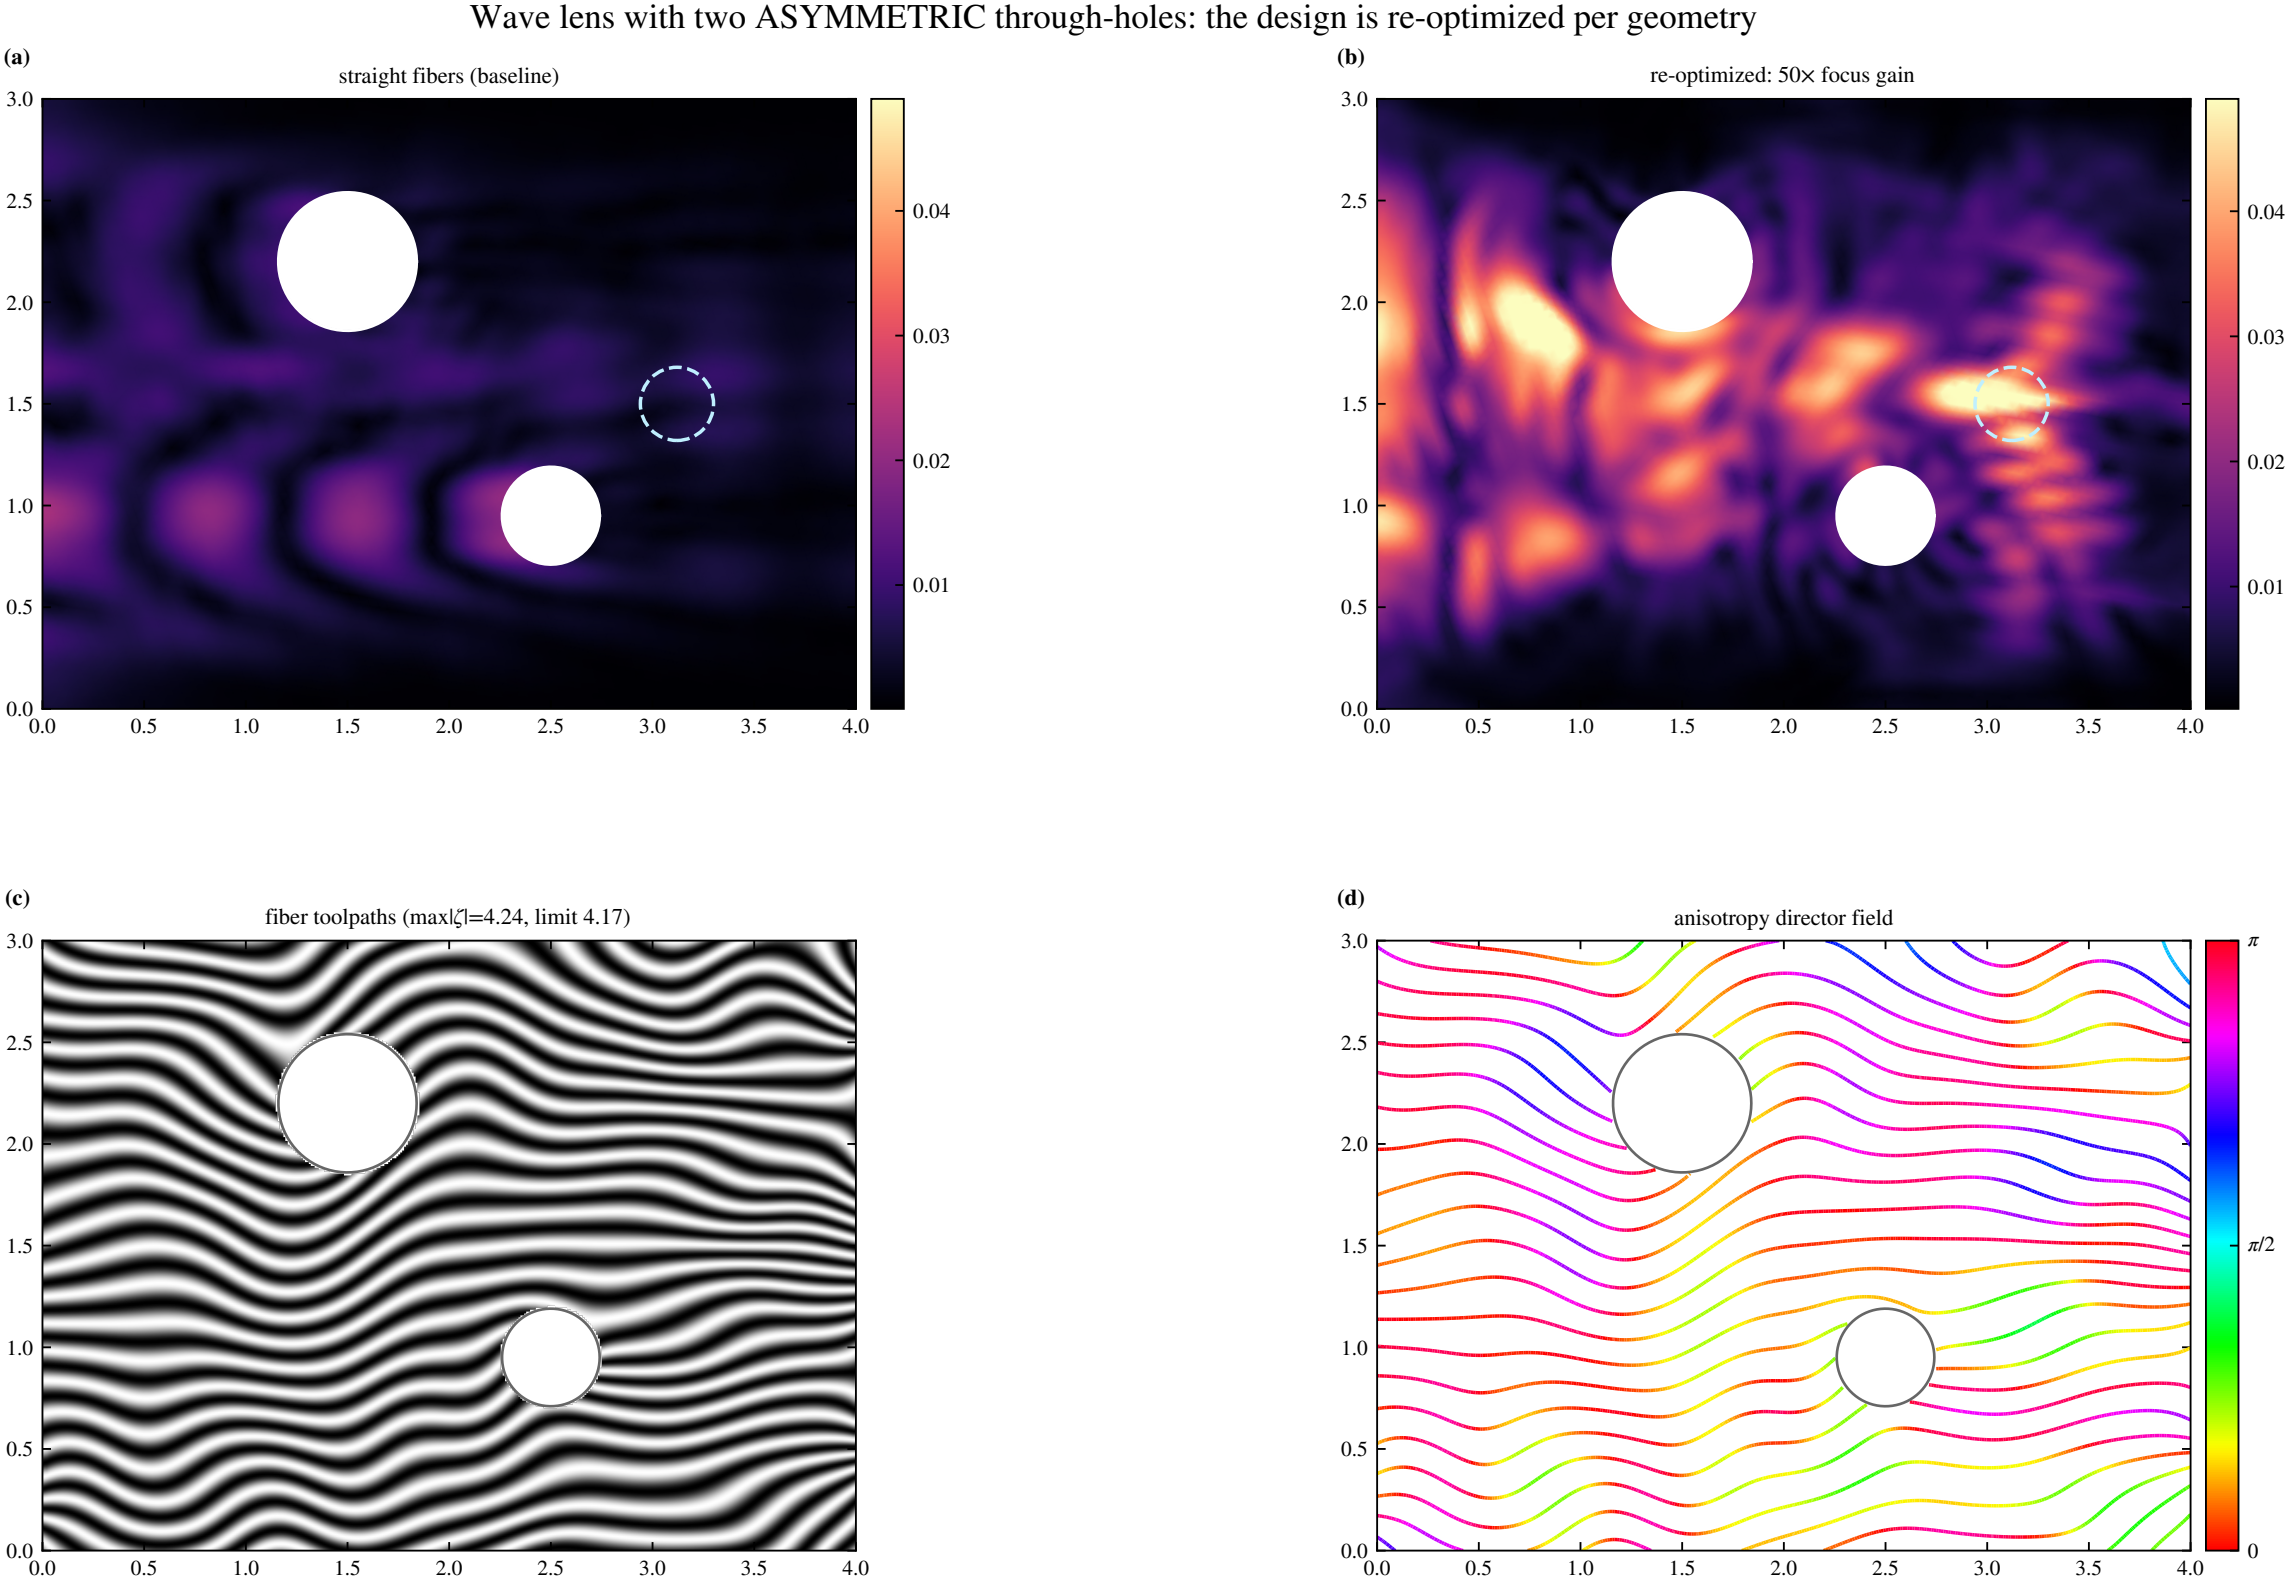

Wave lens with two ASYMMETRIC through-holes: the design is re-optimized per geometry
(a)
straight fibers (baseline)
(b)
re-optimized: 50× focus gain
(c)
fiber toolpaths (max|ζ|=4.24, limit 4.17)
(d)
anisotropy director field
0.0
0.5
1.0
1.5
2.0
2.5
3.0
3.5
4.0
0.01
0.02
0.03
0.04
π
π/2
0